
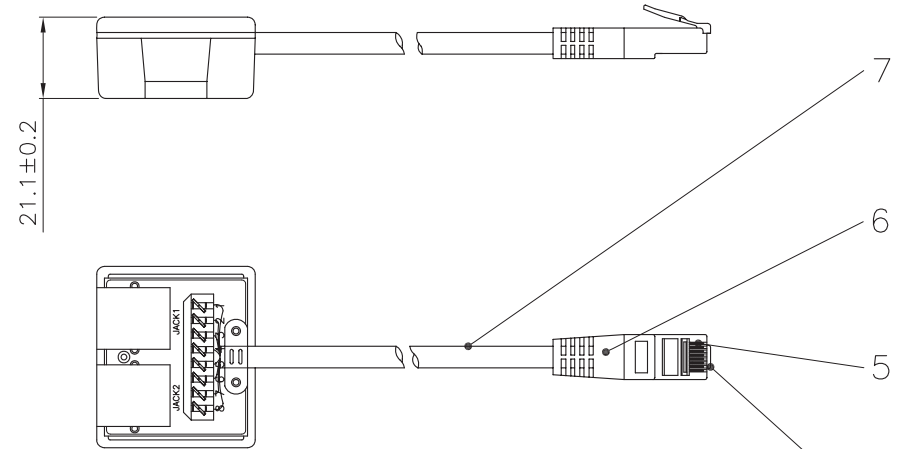
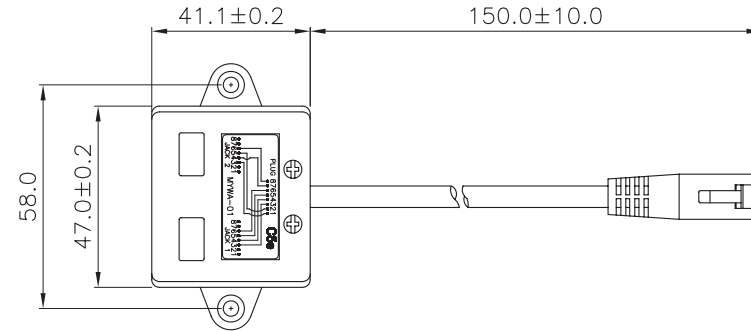



Wiring information

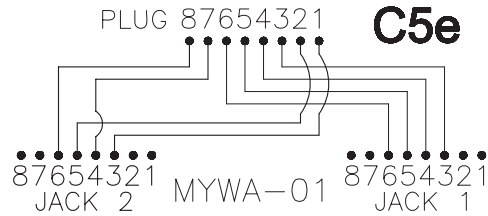

Specification :

Material :

- Top & Bottom case : ABS, UL 94-HB.
- RJ45 JACK Housing : PBT, UL 94V-0.
- RJ45 Contact material & finished :
 - Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact area : Min. 3mm 50 micro-inch Gold plated.
- RJ45 Plug Housing : Polycarbonate, UL 94V-0, Transparent color.
- RJ45 Plug Contact material & finished :
 - Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact area : Min. 50 micro-inch Gold plated.
- Assembly Type : Normal Molded, White PVC.
- Cable Type : (UTP) Unshielded Twisted Pair, 24 AWG Stranded Conductor.

Performance :

- Operation Temperature : -40°C to 80°C.
- Insertion Force : 900 gms for 8 contacts.
- Retention Strength : 7.7 kgs between Jack and Plug.
- Durability : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.

Remark : MYWA01-C5E/XX
(1)

(1) XX : Color
WH=White, IV=Ivory.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	22.JUN.2005	Michelle	
	CHECK	22.JUN.2005	Jaimy	
	APPROVAL	22.JUN.2005	Magic	
		DATE	NAME	ITEM NO.: 22 2134
	SCALE	1/2 (A4)	UNIT	mm
				DES.: CAT.5e Modular "Y" Wiring Adaptor
	DRAWING NO. MYWA01-C5E-XX(SA2)			
	DRAWING CLASSIFICATION		S	SHEET 1 OF 1
			A2	