

DATA SHEET



USB-C to VGA Video Adapter Cable

Connect a USB Type-C device to the VGA port of a monitor or projector to display video

OVERVIEW

The USB-C to VGA Video Adapter Cable allows for a direct connection of a USB-C device to a monitor, projector, or other display with a VGA port—making it an ideal solution for the office, work space applications, or home use.

The cable form factor of this adapter provides a simple and convenient solution that eliminates the need for a separate adapter and cable.

This adapter utilizes the audio/video support built into USB Type-C ports to feed an video signal to a monitor or projector. This adapter supports up to a 1920x2100 at 60Hz resolution, allowing it to deliver a high quality video image to the connected display.

FEATURES

- Supports up to a 1920x1200 resolution at 60Hz
- Reversible, symmetrical USB-C connector
- Adapter in cable form factor
- Plug and Play—no driver required

ITEM DESCRIPTION

26892	9ft USB-C to VGA Video Adapter Cable
26894	3ft USB-C to VGA Video Adapter Cable
26895	6ft USB-C to VGA Video Adapter Cable

DATA SHEET


SPECIFICATIONS: USB-C to VGA Video Adapter Cable

ELECTRICAL SPECIFICATIONS:

- USB Type-C [34AWG(7/0.06TC)+EAM]*4P+32AWG(7/0.08)*2C+26AWG(7/0.16TC)*2C+32AWG(7/0.08TC)*4C+AB(16/10/0.08TC 85%TC)OD:4.2MM~Black
- Rated Temperature: 80°C; Voltage: 30V
- Max Conductor Resistance at 20°C: 34AWG, 860 OHMS/KM
- Insulation Resistance: 10M-KM MIN at 20°C DC 500V.(EIA—364—21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown.(EIA—364—20)

PHYSICAL SPECIFICATIONS:


- Operating Temperature: 0 ~ 45°C Ambient
- Storage Temperature: -10 ~ 70°C Ambient
- USB Type-C Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation
- VGA15 Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation. Chipset: SY8088AC
- Molding Material: Black PVC Conforms to RoHS
- Product is CE Marked and Conforms to 2011/65/EU RoHS22

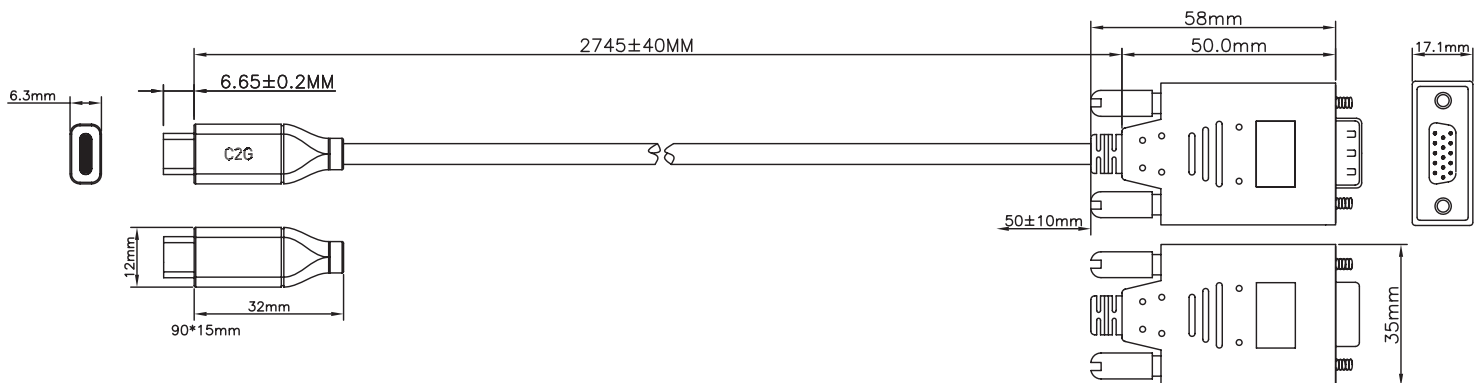

Pin Assignment

Conn.1		Conn.2
CC	A5	A5
DP1	A6	A6
DN1	A7	A7
SBU1	A8	A8
Vconn	B5	B5
SBU2	B8	B8
SSTXp1	A2	A2
SSTXn1	A3	A3
SSRXp2	A11	A11
SSRXn2	A10	A10
SSTXp2	B2	B2
SSTXn2	B3	B3
SSRXp1	B11	B11
SSRXn1	B10	B10
GND (A1,A12,B1,B12)		A1,A12,B1,B12
Shell		
VBUS (A4,A9,B4,B9)		A4,A9,B4,B9

CABLE Cross Section.:

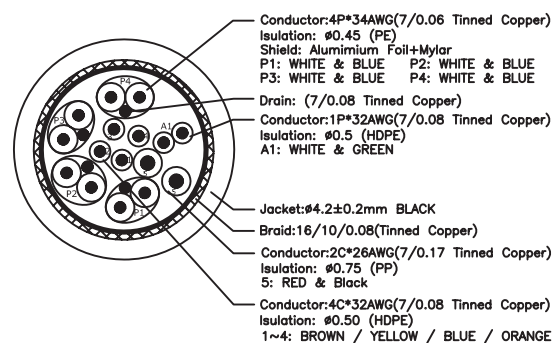

C2G
A brand of **legrand**

3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.CABL.911
www.c2g.com

Follow Us

