




Product Datasheet

Alkaline

Alkaline Power



LR03APB

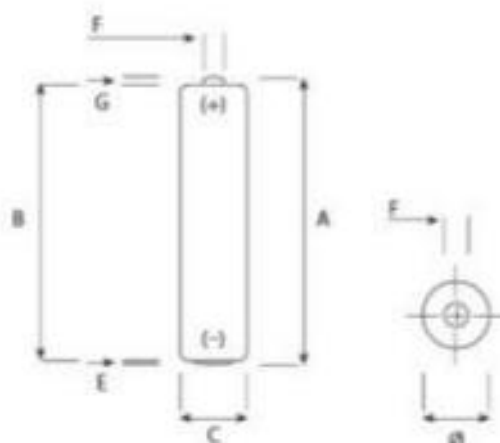

IEC Dimensions [mm]		
Dimension	Maximum	Minimum
A	44,5	—
B	—	43,5
C	—	4,3
E	0,5	—
F	3,8	—
G	—	0,8
Ø	10,5	9,8

Name	LR03/S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +55°C (131°F)
Average impedance	+/- 150 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell (0,9V per cell for multi series usage)

For more information:

www.panasonic-batteries.com

Panasonic

Advanced Power Solutions NV







Brusselsesteenweg 502 | B-1731 Zellik | Belgium

IBAN BE85 3101 1125 1006 | Swift: BBRUBEBB | VAT BE 0414 688 361 | RPR Brussel



Typical discharge values

LR03APB

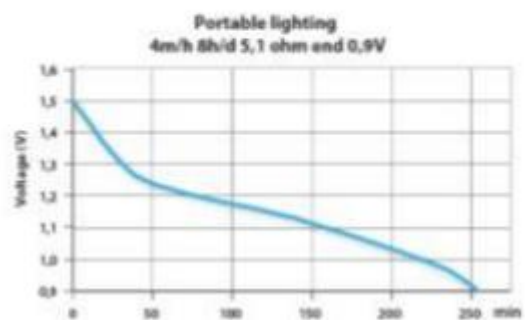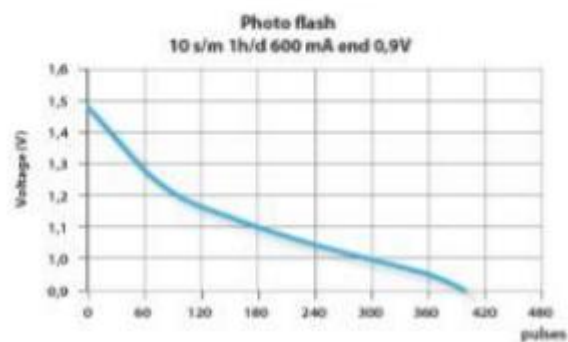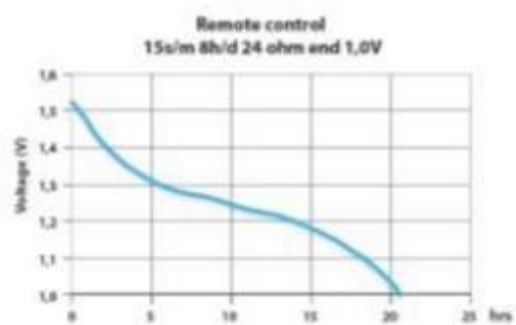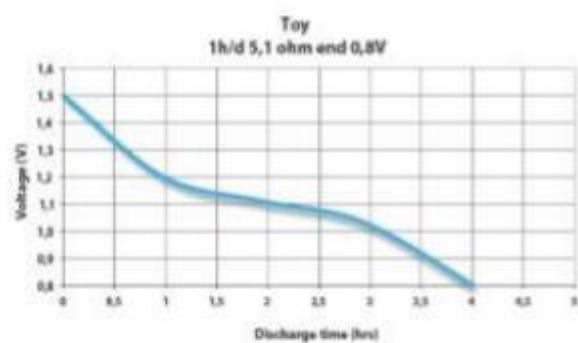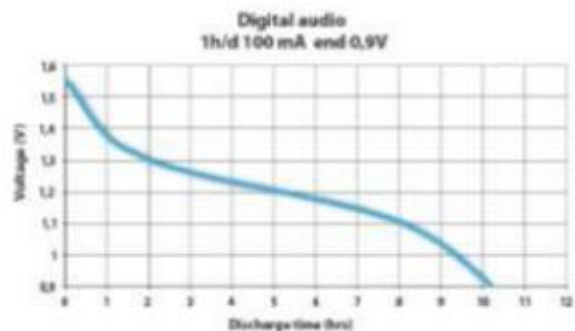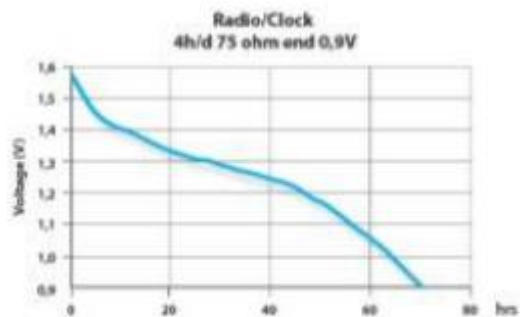

Copyright© Advanced Power Solutions NV (2021) – All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of each information. Test results are according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change without prior notifications. September 2021.