


# Product Datasheet

## Alkaline

*Alkaline Power*



LR6APB

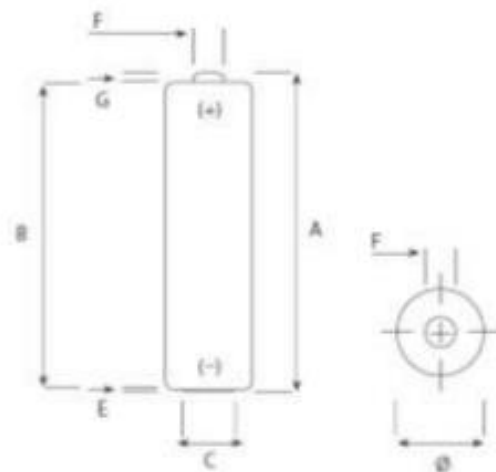

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	—
B	—	49,5
C	—	7,0
E	0,5	—
F	5,5	—
G	—	1,0
D	14,5	13,7

Name	LR6 / NI / AA / AM3 / MIGNON / MN1500 / TSA / TSAC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	22 g
Storage temperature range	+10°C (50°F) – +25°C (77°F)
Operating temperature range	-20°C (-4°F) – +55°C (131°F)
Average impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell (0,9V per cell for multi series usage)

For more information:  
[www.panasonic-batteries.com](http://www.panasonic-batteries.com)

**Panasonic**

Advanced Power Solutions NV

Brusselsesteenweg 502 | B-1731 Zellik | Belgium

IBAN BE85 3101 1125 1006 | Swift: BBRUBEBB | VAT BE 0414 688 361 | RPR Brussel



## Typical discharge values

### LR6APB

