

FAST AND SECURE WORKGROUP COLOUR PRINTER

EPSON ACULASER C3800N SERIES



Fast output: print speeds of 25 ppm in mono, 20 ppm in colour, 15 seconds first page out.

Quiet printing: quiet printing and noiseless standby immediately after printing ensures a less stressful work environment.

Reliable for higher volume users: thanks to 128MB memory, expandable to 1GB, 600MHz controller and 60,000 pages maximum monthly volume.

No-hassle integration: has all interfaces required (USB & Ethernet) and printer languages (PCL6, PS3) as standard.

No noise, no stress

Fast, reliable, easy to use and quiet: with the networked Epson AcuLaser C3800N Series colour printing is surprisingly quiet and is noiseless in standby mode. With a first page out in under 15 seconds and print speeds of 25ppm in mono and 20ppm in colour it is fast enough for long documents to be printed in a short time.

Cost-effective printing, high-quality output

With a low print cost per page, the Epson AcuLaser C3800N Series makes no compromise on quality with a print resolution of 1200 x 1200 dpi and a large memory capacity. Clear instructions and diagrams on the backlit LCD viewer make this printer both easy to use and maintain.

Worry-free printing for your business

Ensure confidentiality of your prints: just insert your USB key and select your document for printing, including your password protected PDF. There is no need to worry about running out of toner in the middle of an important job – if colour runs out, the printer will simply convert your document to mono and keep printing.


PRODUCT SPECIFICATIONS

PRINT FEATURES Printing technology Resolution Print speed First page out Maximum monthly volume	Laser True 1200x1200dpi, 4800dpi RIT* A4 monochrome: 25ppm, A4 color: 20ppm 15 sec 60,000 pages
CONTROLLER SPECIFICATIONS Processor Memory Printer control language emulations Resident typefaces	600MHz Standard: 128MB, Max: 1GB Genuine Adobe® PostScript® 3, PCL6, PCL5c, PDF1.3, ESC/Page™, ESC/P2™, ESC/page™ Color, FX, I239X Scale: 17 for PS3, 80 for PCL6, 95 for PCL5c, 84 for ESC/Page™, 10 for ESC/P2™, 8 for FX, 8 for I239X BitMap: 1 for PCL6, 5 for PCL5c, 7 for ESC/Page™ BitMap include Barcode OCR A, B, Code 39, EAN/UPC
INTERFACES AND CONNECTIVITY Standard interfaces Optional interfaces Network printing protocols Network management protocols	Ethernet, USB 2.0 compliant, USB-Host slot for USB printing Type B interface TCP/IP: LPR, FTP, IPP, PORT2501, PORT9100 MS Network: NetBIOS over TCP/IP, NetBIOS over NetBEUI Netware: Operation mode, Standby, NDS Print Server, Bindery Print Server, Remote Printer AppleTalk TCP/IP: SNMP, HTTP, TELNET, DHCP, BOOTP, APIPA, PING, DDNS, mDNS(mDNS is used with Bonjour), SNTP, SSDP, SLP Microsoft Network: AutoIP, SSDP; NetBEUI: SNMP, SSDP NetWare and AppleTalk: SNMP, EMPC
CONSUMABLES LIFE High capacity toner cartridges Standard capacity toner cartridges Initial capacity toner cartridges	black 9,500 pages, cyan / magenta / yellow 9,000 pages colour 5,000 pages black 9,500 pages, cyan / magenta / yellow 5,000 pages
MAINTENANCE ITEMS Transfer belt unit Fuser unit	100,000 pages 100,000 pages
MEDIA HANDLING Standard paper input Maximum paper input Paper size Paper weight Optional paper handling Paper output standard/maximum	700 sheets (150-sheet MP tray + 550 sheet paper cassette) 1,250 sheets (150 sheet MP tray + 2 x 550 sheet paper cassettes) A4, A5, B5, LT, HLT, GLT, EXE, LGL, GLG, F4, MON, DL, C5, C6, C10, IB5 Custom size from 76 x 127 mm to 216 x 356 mm 60-216 g/m2 Up to one extra 550 sheet paper cassette Automatic duplex unit 250 sheets (face down)
POWER REQUIREMENTS Norms Rated voltage/frequency/current Average power consumption	Energy Star 220V - 240V ±10% / 50Hz or 60Hz ± 3Hz / 4.0 A or less 361 W (colour) / 78 W / 17W
SYSTEM REQUIREMENT & OS SUPPORT PC requirement OS supported Mac requirement OS supported Linux/Unix/Citrix/SAP/Novel Support	IEEE 1284 ECP mode, ethernet (10/100 Base Tx) or USB (1.1 or higher) Microsoft® Windows® NT 4.0 / 98 / 2000 / Me / XP / XP x64 / Server 2003 / Server 2003 x64 / Terminal Server 2003 / Vista / Vista x64 / Server 2008 / Server 2008 x64 EtherTalk or USB Mac OS 7.6 or later, Mac OS X 10.2 or later For compatibility details relating to Linux, Unix, Novell, SAP, etc. Please refer to http://www.business-solutions.epson.co.uk/Compatible.htm
ADDITIONAL SOFTWARE Drivers Software	Printer driver, Epson Status Monitor 3, reference guide, paper jam guide USB memory print maker, network utilities, network guide
DIMENSIONS AND WEIGHT (W x D x H mm, Kg)	AcuLaser C3800N: 420 x 501-575 x 508 mm, 25.8 Kg
ENVIRONMENTAL CONDITIONS Temperature Humidity Sound pressure	Operation: 5 to 32°C, storage: 0 to 35°C Operation: 15 to 85% RH, storage: 15 to 80% RH Operating: 51 dB(A), stanby: 30 dB(A)
SAFETY AND REGULATIONS Safety standards EMC/EMI	Low Voltage Directive 73/23/EEC EN 60950, EN60825-1, Conforms to OSHA, TSCA, and EINECS EMC Directive 89/336/EEC EN 55022 Class B, EN 55024, EN 61000-3-2; EN 61000-3-3, JBMA harmonics control guidelines
WARRANTY** Standard Optional	1 year On-Site Epson Cover Plus 3 year On-Site extended warranty

* EPSON Resolution Improvement Technology

** Warranty offers are not available in all countries. Please contact your local Epson representative for more information.

EPSON ACULASER C3800N SERIES

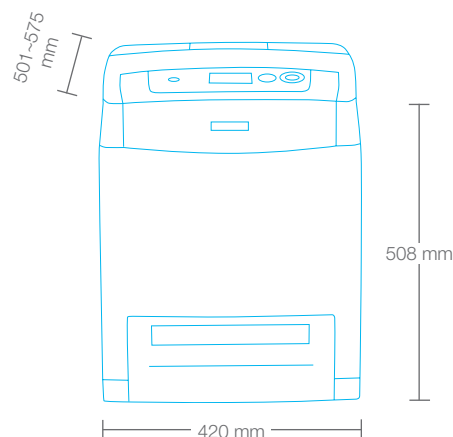

MODEL CONFIGURATION

- AcuLaser C3800N C11C648001BZ
- AcuLaser C3800DN includes automatic duplex C11C648041BZ
- AcuLaser C3800DTN includes automatic duplex and extra 550-sheet paper cassette C11C648041BY

SUPPLIES

- High capacity toner cartridges:
 - Black (9,500 pages) C13S051127
 - Cyan (9,000 pages) C13S051126
 - Magenta (9,000 pages) C13S051125
 - Yellow (9,000 pages) C13S051124
- Standard capacity colour toner cartridges:
 - Cyan (5,000 pages) C13S051130
 - Magenta (5,000 pages) C13S051129
 - Yellow (5,000 pages) C13S051128
- Transfer belt unit (100,000 pages) C13S053024
- Fuser unit (100 000 pages) C13S053025
- Initial cartridge: black 9,500 pages, cyan / magenta / yellow 5,000 pages

OPTIONS

- 550 sheet paper cassette C12C802291
- Duplex unit C12C802301
- Memory:
 - 128MB 7012051
 - 256MB 7012079
 - 512MB 7104195
- Epson Cover Plus 3 year On-Site extended warranty ECPGRP50

Better Products for a Better Future™

At Epson, we know that planning for the future requires a strong commitment to the environment. That is why we strive to create innovative products that are reliable, recyclable, and energy efficient. Better products that use fewer resources help ensure a better future for us all.



For further information please contact your local Epson office or visit www.epson-europe.com

Austria 0810/20 01 13 (0.07 €/Min.) Belgium 070/350120 (0.1735 €/min.) Czech 800/142 052 Denmark 44 50 85 85 Finland 0201 552 091
France 09 74 75 04 04 (0.12€/min) Germany 01805/23 41 10 (0.14 €/Min.) Greece 210-8099499 Hungary 06800 147 83 Ireland 01 436 7742
Italy 02-660321 10 (0.12 €/min.) Luxembourg 900/43010 (0.24 €/min.) Middle East +9714 8818934 Netherlands 0900-5050608 (0.05 €/oproep
+ 0.15 €/min.) Norway 22 06 42 80 Poland 0-800 4911299 (0.16 zł/min.) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia 0850 111 429
South Africa (+2711) 465-9621 Spain 93 582 15 00 Sweden 0771-400135 (Mobilsamtal - 0.99 kr/min, Lokala samtal - 0.30 kr/min, Utlandsamtal -
0.89 kr/min) Switzerland 0848 448820 (4-8 cent./min.) Turkey (0212) 3360303 United Kingdom 0871 222 6702

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners. Product information is subject to change without prior notice.

EPSON®