PREMIER MOUNTS

PSD-DPAB
Installation Guide

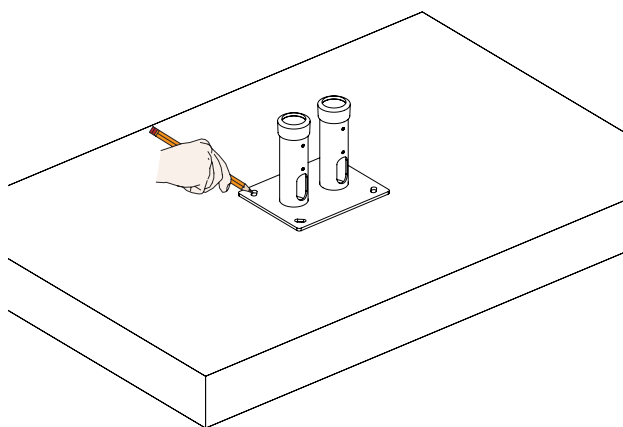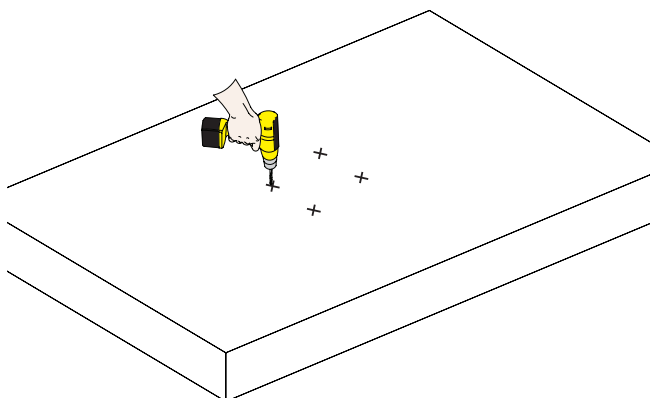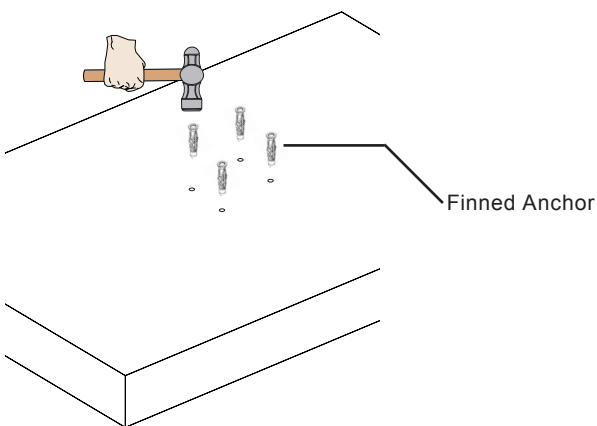|				
x1	x4	x4	x4	x1
Base	5/16" Washers	5/16" x 3" Lag bolts	Finned Anchor	5/32" Allen Key

1

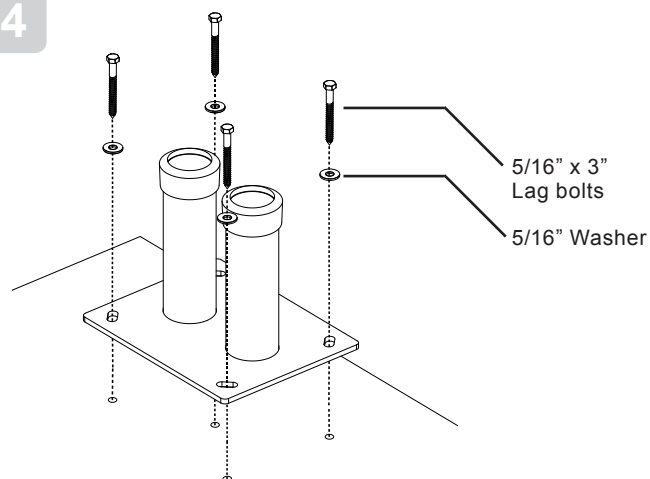Find your desired mounting location. Use a pencil and mark 4 mounting holes locations through the slots.

2

Use a drill gun and a 3/8" concrete drill bit on mark locations.

3

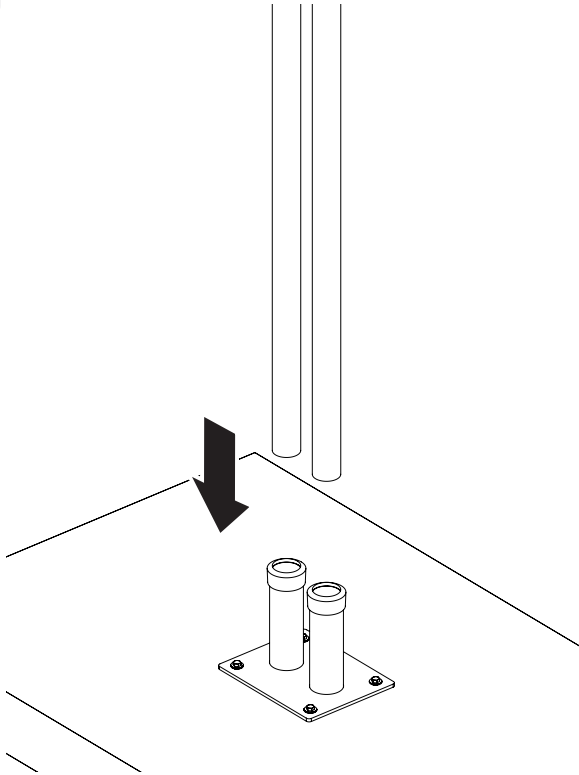Finned Anchor

Lightly hammer the finned anchors into the holes.

4

5/16" x 3" Lag bolts

5/16" Washer

Place the base over the finned anchors and use one 5/16" x 3" lag bolt and 5/16" washer per hole.
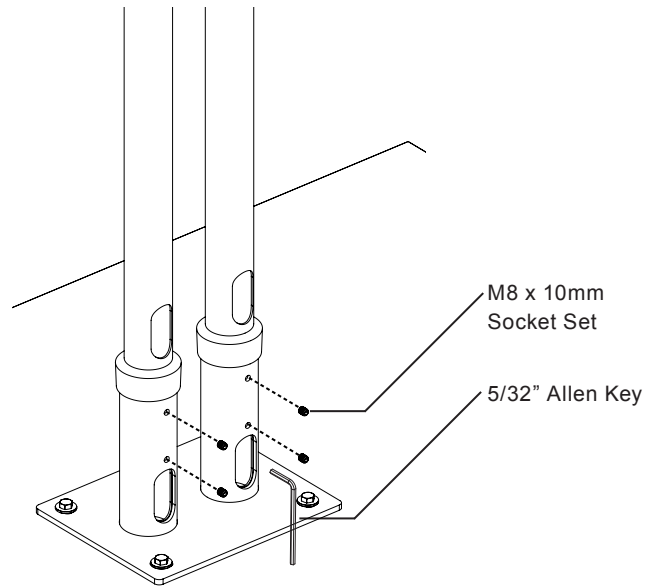
5

6

M8 x 10mm
Socket Set

5/32" Allen Key

Use 5/32" Allen Key to tighten the pre-installed M8 x 10mm
Socket Set screws.

PREMIER
MOUNTS