


P/N	L/mm	T/mm
26-7181	1000	30
26-7188	2000	40

PIN OUT

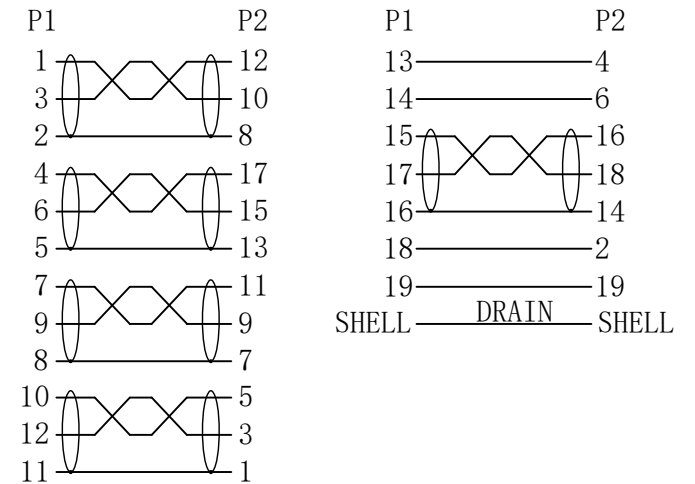

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10M Ω Min
3. CONDUCTIVE RESISTANCE:5 Ω Max
4. RESOLUTION:4K*2K@60Hz
5. RoHS & REACH COMPLIANT

⑨	DUST CAP	MINI DP MALE DUST CAP	1	PCS
⑧	DUST CAP	DP MALE DUST CAP	1	PCS
⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	MINI DP MALE BLACK PLASTIC HOOD	1	SET
④	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	1	SET
③	CONNECTOR	MINI DP 20PIN MALE, THE PIN GOLD PLATED, WHITE INSULATION, GOLD PLATED SHELL	1	PCS
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(1/0.20BC*1P+1/0.20BC+FAM)*5C+1/0.20BC*4C+AL+D(1/0.20BC)+B(5*16/0.12AL-MG), BLACK PVC JACKET, OD:4.8 \pm 0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 30	File name	Date 2025. 10. 30	Scale FREE
ANGLE:					DP1.2 M-MINI DP M	
UNIT:MM					26-718X	Edition 1