RM-LCD Series

LCD Racckmount

LCD Rackmount available in three styles to mount monitors up to 32"

- Mounts monitors with VESA 75 and VESA 100 patterns
- · Adjustable depth allows for recessing of monitor
- · Models with a flat plate, tilt and telescoping arm available
- · Models with flat plate and knuckle mount most monitors up to 20", depending on overall size
- Model with telescoping arm mounts monitors up to 32"



EIA Compliant 19" LCD Rackmount shall be Middle Atlantic Products model # RM-LCD-PNLV for flat plate, PNLK for tilt, MT for Telescoping arm). RM-LCD shall accept monitors with a VESA 75 or 100 mounting pattern. RM-LCD shall have a weight capacity of 35 lbs. for MT models and 27 lbs. for PNLV and PNLK models. RM-LCD shall have a durable black powder coat finish. RM-LCD shall be constructed from 16-gauge steel. RM-LCD shall recess from 2" to 9" from the face of the rackrail. RM-LCD-PNLK shall tilt 160°. RM-LCD-MT shall have an arm with a range of 2.5" to 16.5". RM-LCD-(MT, PNVL, PNLK) shall accept monitors of up to 20", with an overall width of no more than 17.38". RM-LCD shall comply with the requirements of RoHS EU Directive 2002/95/EC. RM-LCD shall be manufactured by an ISO 9001 and ISO 14001 registered company. RM-LCD shall be warrantied to be free from defects in material and workmanship under normal use and conditions for the lifetime of the product.


Customizable specification clips available at middleatlantic.com


EIA/TIA COMPLIANT





RM-LCD Series basic dimensions

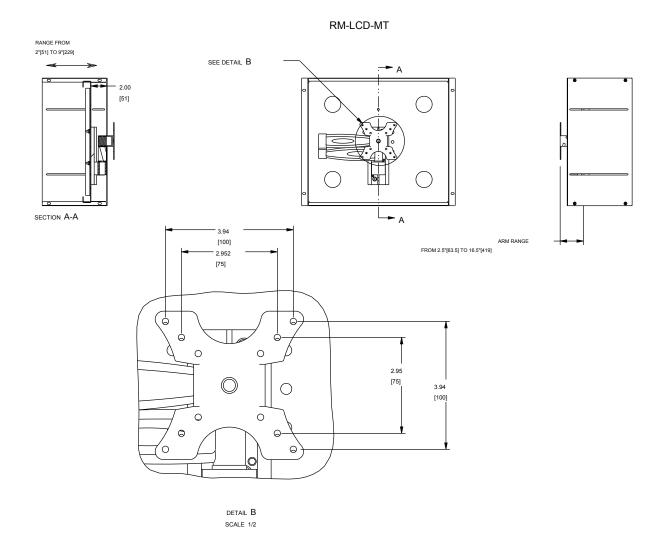





what **great systems** are built on.™








RM-LCD Series basic dimensions










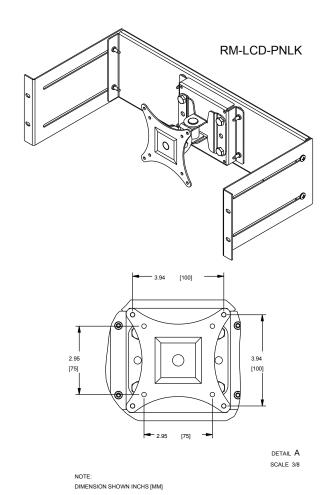





RM-LCD Series basic dimensions

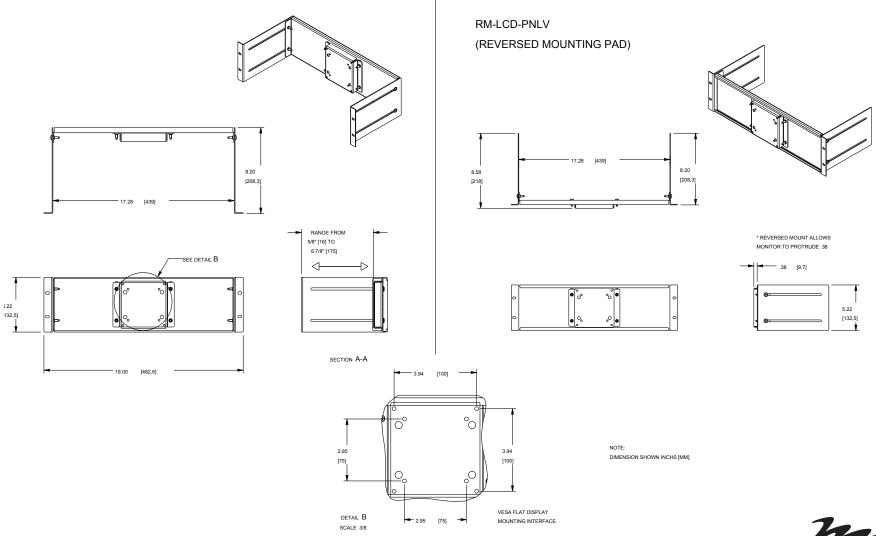

what **great systems** are built on.™

