

DTRK Series 19" Desktop Racks

C US LISTED

Attractive desktop and under-desk equipment mounting solution

Features

- Ships fully assembled
- Steel construction
- Vented and Plexi front doors available
- Brush Grommet rear access panel available
- Optional brackets provide compatibility with the patent-pending LeverLock[™] tool free and hardware free internal device and cable management system accessories
- Optional casters for under-desk use
- UL Listed in the US and Canada



Architects and Engineers' Specifications


EIA compliant 19" desktop/under-desk equipment rack shall be Middle Atlantic Products model #DTRK-___18 (see chart for available models). Overall dimensions of DTRK shall be ____"H x 21-3/8"W x 19-1/2"D (refer to chart). Useable height of DTRK shall be ____ rackspaces, useable depth shall be 18-1/2". DTRK shall come equipped with two pairs of steel rackrail with tapped 10-32 mounting holes in universal EIA spacing, black e-coat finish and numbered rackspaces. Sides of DTRK shall feature vertical slotted vent pattern for ventilation. DTRK shall accept patent-pending LeverLock™ tool free and hardware free internal cable and device management system accessories when used with optional LL-DTRK adapter (10 space + only). DTRK shall be of fully welded construction. DTRK shall be finished in an environmentally friendly, durable metallic grey powdercoat. Fully welded construction shall provide a static capacity of 1,200 lbs. and a UL Listed load capacity of 300 lbs. DTRK shall be UL Listed in the US and Canada. DTRK shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. DTRK enclosure shall comply with the requirements of RoHS EU Directive 2002 / 95 / EC compliant. DTRK shall be warrantied to be free from defects in material or workmanship under normal use and conditions for the lifetime of the rack.

FEATURED OPTIONS

- LeverLock[™] tool free and hardware free internal device and cable management system accessories shall be model # LL-XXYY (XX = type, YY = size, refer to middleatlantic.com for additional details)
- Front doors shall be model # DT-VFD-XX (vented), DT-PVFD-XX (plexi/vented)
- · Solid rear access panel with brush cable entry shall be model # DT-RAPXX
- Commercial grade caster kit shall add 2-3/4" to overall height, include four casters with a 300 lb. weight capacity, and shall be model # DTRK-W
- · Runner kit shall be 5-RS18

CUSTOMIZABLE SPECIFICATION CLIPS AVAILABLE AT MIDDLEATLANTIC.COM

DTRK basic dimensions

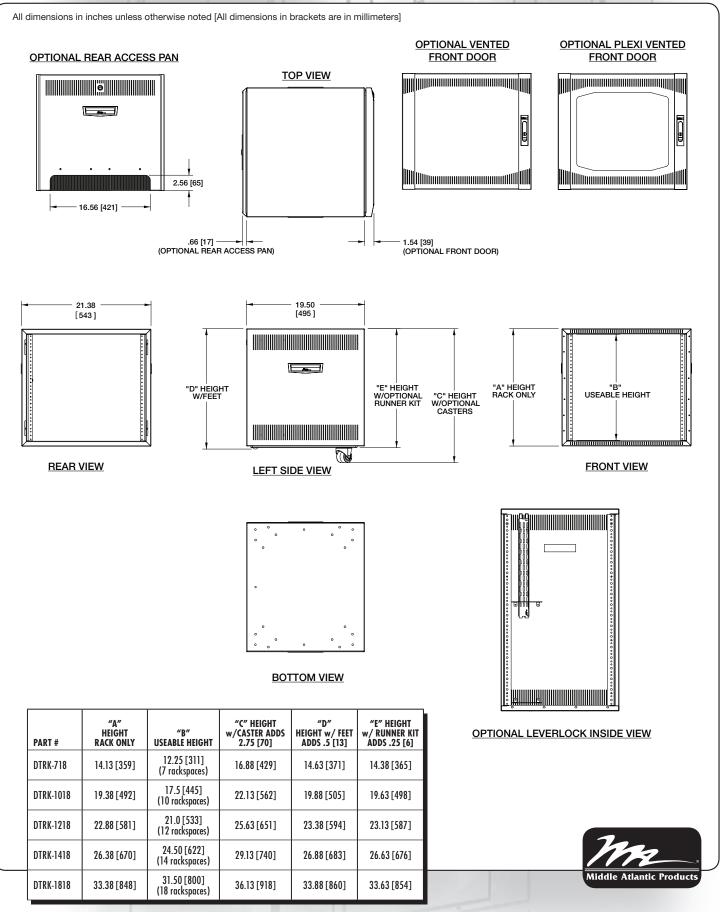

US: New Jersey • California • Illinois • Voice: 973-839-1011 Fax: 973-839-1976 • middleatlantic.com Canada: Ontario • British Columbia • Voice: 613-836-2501 Fax: 613-836-2690 • middleatlantic.ca