


Delock Adapter SMA male to RP-SMA female 90° 3 GHz

Description

This adapter by Delock is suitable for connecting components of radio frequency technology.

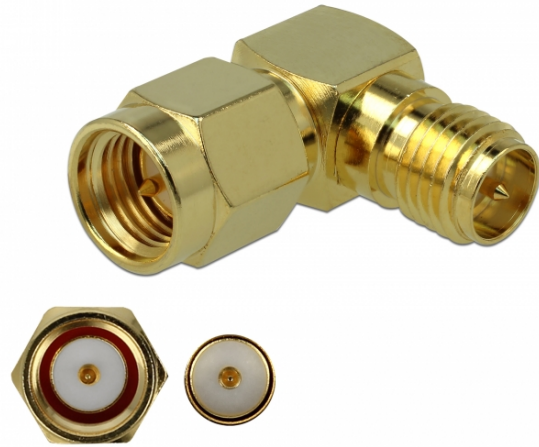

Specification

- Connectors:
 - 1 x SMA plug >
 - 1 x RP-SMA jack 90°
- Housing: brass gold plated
- Inner thread: 1/4" - 36 UNS - 2B
- Frequency range: 3 GHz
- Impedance: 50 Ohm
- Operating temperature: -10 °C ~ 50 °C
- Dimensions (LxW): ca. 17.5 x 15.15 mm

System requirements

- Device with one free SMA or RP-SMA port

Package content

- Adapter

Item no. 89967

EAN: 4043619899678

Country of origin: Taiwan, Republic of China

Package: Poly bag

**Interface**

Connector 1:	standard 1 x SMA plug
Connector 2:	standard 1 x RP-SMA jack 90°

Technical characteristics

Frequency range:	standard 3 GHz
Operating temperature:	standard -10 °C ~ 50 °C

Physical characteristics

Housing material:	standard Brass gold plated
Length:	standard 17,5 cm
Width:	standard 15.15 mm
Thread type:	standard 1/4 36UNS-2B