

DATA SHEET



2-Port USB-C + USB-A Wall Charger, 5.4A Max Output

Simultaneously charge a USB-C and a USB A mobile device from a single outlet

OVERVIEW

The 2-Port USB-C + USB-A Wall Charger is an ideal solution for charging or powering portable devices at home, in the office, or on the go. This adapter features a compact design for easy portability and provides a maximum power output of 5V and 5.4A for device charging. The compact design of this adapter makes it easy to toss into a suitcase or backpack for charging on the go. The AC prongs fold into the adapter for travel, lessening the likelihood of damage to the prongs. A maximum of 5 volts and 5.4 amps of power are available through a single USB-C 3A port and a single USB-A 2.4A port for device charging when plugged into an AC outlet. The power output makes this adapter perfect for charging smartphones and tablets.

FEATURES

- 5V, 5.4A maximum output
- One 3A USB Type-C female port
- Compatible with USB-C and Thunderbolt[™] 3 cables
- One 2.4A USB-A female port
- Compact size
- Foldable AC prongs

ITEM DESCRIPTION

20280 2-Port USB-C + USB-A Wall Charger, 5.4A Max Output

DATA SHEET

SPECIFICATIONS:

2-Port USB-C + USB-A Wall Charger, 5.4A Max Output

ELECTRICAL SPECIFICATIONS:

- Input voltage range: 90-264V AC
- Nominal input voltage: 100-240V AC
- Frequency range: 47-63Hz
- Input current with full load: $\leq 0.6A$
- Inrush current: 60A
- Efficiency(USB C Port): $\geq 84.1\%$
- Standby Power Loss: $\leq 0.1W$

USB-A Female Port







- Output Voltage: 5.0V
- Output Voltage: No load 4.9-5.25V, Full load 4.7-5.25V
- Regulation: $\pm 5\%$
- Rated current: 2.4A

USB Type-C Female Port

- Output Voltage: 5.0V
- Output Voltage: No load 4.9-5.25V, Full load 4.5-5.25V
- Regulation: $\pm 5\%$
- Rated current: 3.0A

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0 to +35°C
- Storage Temperature: -20 to +75°C
- Operating Humidity: From 20% to 80% (Non-Condensing)
- Operating Storage: From 10% to 90% (Non-Condensing)
- Operating Altitude: Up to 2000m
- Storage Altitude: Up to 2000m

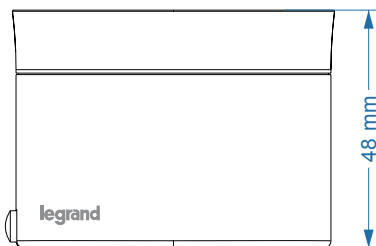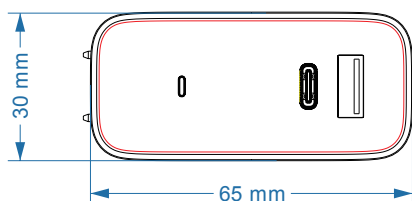

C2G
A brand of **legrand**

6500 Poe Ave.
Dayton, OH 45414
Phone: 800.CABL.911
www.c2g.com

Follow Us

