
# datavideo



30M/ 50M/ 100M ALL IN ONE CABLE CB-22H/ CB-23H CB-24 Quick Start Guide

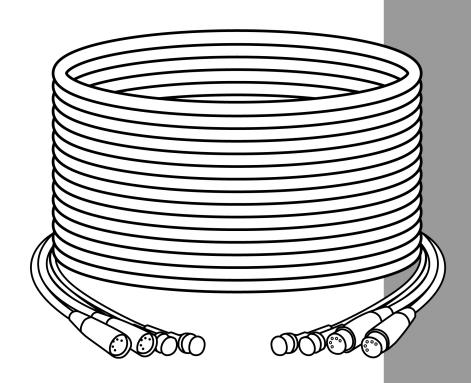

## **Warnings and Precautions**

- 1. Read all of these warnings and save them for later reference.
- 2. Follow all warnings and instructions marked on this unit.
- 3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- 4. Do not use this unit in or near water.
- 5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
- 6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
- This product should only be operated from the type of power source indicated on the marking label of the AC
  adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power
  company.
- 8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
- 9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord's rating.
- 10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
- 11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
- 12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself.

  Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
- 13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
  - a. When the power cord is damaged or frayed;
  - b. When liquid has spilled into the unit;
  - c. When the product has been exposed to rain or water;
  - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
  - e. When the product has been dropped or the cabinet has been damaged;
  - f. When the product exhibits a distinct change in performance, indicating a need for service.

# Warranty

### **Standard Warranty**

- Datavideo equipment is guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered by this warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- Cables & batteries are not covered under warranty.
- Warranty only valid within the country or region of purchase.
- · Your statutory rights are not affected.

### **Two Year Warranty**

- All Datavideo products purchased after 01-Oct.-2008 qualify for a free one year extension to the standard Warranty, providing the product is registered with Datavideo within 30 days of purchase. For information on how to register please visit www.datavideo-tek.com or contact your local Datavideo office or authorized Distributors
- Certain parts with limited lifetime expectancy such as LCD Panels, DVD Drives, Hard Drives are only covered for the first 10,000 hours, or 1 year (whichever comes first).

Any second year warranty claims must be made to your local Datavideo office or one of its authorized Distributors before the extended warranty expires.


# **Disposal**



# For EU Customers only - WEEE Marking


This symbol on the product indicates that it will not be treated as household waste. It must be handed over to the applicable take back scheme for the recycling of electrical and electronic equipment. For more detailed information about the recycling of this product, please contact your local Datavideo office.

# CB-22H/ 23H Setup Diagram

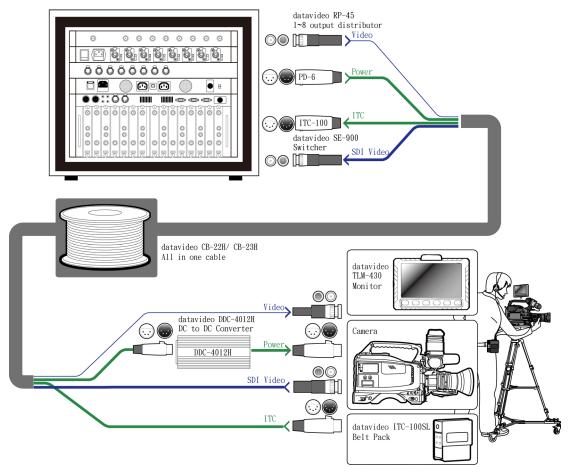



**Remark :** The Power cable's PIN defines of CB-22H/23H is corresponding to PD-6. The purpose of changing PIN define is to avoid camera damage by high power. CB-22H/23H should be used with PD-6.

# **CB-24 Setup Diagram**

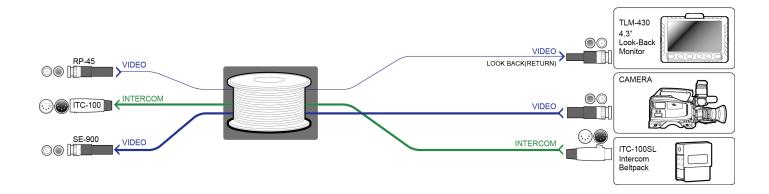

All in one cable (CB-22H/ CB-23H/ CB-24) Package included Velcro, how to use please see as below.

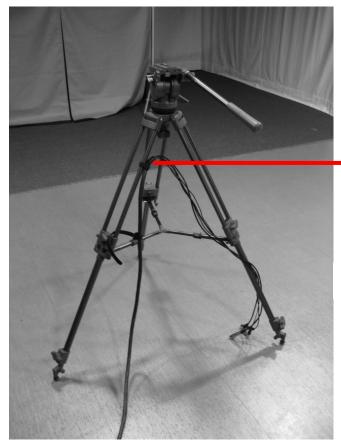



This Velcro can let you fixed cable on the tripod.

# **Specifications**

| HD/SD<br>SDI video Cable        | BNC Male to another BNC Male connector     3C-2V Coaxial Cable                                   |
|---------------------------------|--|
| Watch back video<br>Cable       | BNC Male to another BNC Male connector     1.5C-2V Coaxial Cable                                 |
| Intercom Cable                  | 5Pin XLR Female to another 5Pin XLR Male connector     Connector ITC-100 to ITC-100SL(Belt pack) |
| Power Cable<br>(CB-22H, CB-23H) | 4Pin XLR Female to another 4Pin XLR Male connector     PIN1:Negative, PIN2:Positive              |
| Distance                        | • CB-22H: 30M, CB-23H: 50M, CB-24: 100M  |
| Operating<br>Temperature        | • -25°C to 55°C (-13°F to 131°F)   |
| Humidity                        | • 10% to 90% (non condensing)  |
| Weight                          | • Approx. CB-22H: 6kg/13.2lbs, CB-23H: 9.5kg/21lbs, CB-24: 17.3kg/38.2lbs                        |

# **Electrical Characteristics**

| Model            | CB-22H (30M) |         |                  | CB-23H (50M) |         |                  | CB-24 (100M) |                  |
|------------------|--------------|---------|------------------|--------------|---------|------------------|--------------|------------------|
| Conductor        | 3C2V         |         | 1.5C2V           | 3C2V         |         | 1.5C2V           | 3C2V         | 1.5C2V           |
| Test Patten      | HD-SDI       | SD-SDI  | SD/<br>Composite | HD-SDI       | SD-SDI  | SD/<br>Composite | SD-SDI       | SD/<br>Composite |
| Cable loss       | < 4dB        | < 3.8dB | < 3%             | < 6.5dB      | < 5.5dB | < 15%            | < 12dB       | < 20%            |
| Timing Jitter    | < 0.2UI      | < 0.1UI |                  | < 0.2UI      | < 0.1UI |                  | < 0.1UI      |                  |
| Alignment Jitter | < 0.2UI      | < 0.1UI |                  | < 0.2UI      | < 0.1UI |                  | < 0.1UI      |                  |

| Notes |  |  |  |
|-------|--|--|--|
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |
|       |  |  |  |

# Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.

### **Datavideo Taiwan**

Datavideo Technologies Co. Ltd 10F. No. 176, Jian 1st Rd., Chung Ho District, New Taipei City 235, Taiwan, R O C

Tel: +886-2-8227-2888 Fax: +886-2-8227-2777

E-mail:service@datavideo.com.tw

### Datavideo USA

Datavideo Corporation 7048 Elmer Avenue. Whittier, CA 90602, U.S.A.

Tel:+1-562-696 2324 Fax:+1-562-698 6930 E-mail:sales@datavideo.us

### **Datavideo Hong Kong**

Datavideo Hong Kong Ltd G/F.,26 Cross Lane Wanchai, Hong Kong Tel: +852-2833-1981 Fax: +852-2833-9916

E-mail:info@datavideo.com.hk

### **Datavideo Europe**

Datavideo Technologies Europe BV Floridadreef 106 3565 AM Utrecht, The Netherlands Tel:+31-30-261-96-56 Fax:+31-30-261-96-57 E-mail:info@datavideo.nl

### **Datavideo China**

Datavideo Technologies China Co 101,NO.618,LiuYing Rd,Zhabei District, Shanghai,China

Tel: +86 21-5603 6599 Fax: +86 21-5603 6770 E-mail:service@datavideo.cn

### **Datavideo France**

Datavideo France s.a.r.l Cité Descartes 1,rue Albert Einstein Champs sur Marne 774477-Marne la Vallée cedex 2 Tel:+33-1-60370246 E-mail: info@datavideo.fr

### **Datavideo United Kingdom**

Datavideo UK Limited Units1 & 2 Waterside Business Park Hadfield, Glossop, Derbyshire SK13 1BE, UK Tel:+44-1457 851 000 Fax:+44-1457 850 964 E-mail:sales@datavideo.co.uk

### **Datavideo Singapore**

Datavideo Technologies (S) PTE Ltd No. 178 Paya Lebar Road #06-03 Singapore 409030

Tel:+65-6749 6866 Fax:+65-6749 3266 E-mail:sales@datavideo.sg

### **Datavideo India**

Datavideo Technologies India Pvt Ltd A-132, Sec-63,Noida-201307, Uttar Pradesh (UP), India. Tel:+91-0120-2427337 Fax:+91-0120-2427338 E-mail: sales@datavideo.in



Please refer to our website for update the latest version manual. www.datavideo.com/Cables/CB-22H

