


NOTES:

1. OPEN/SHORT/INTERMITTENCE: 100%.
2. INSULATION RESISTANCE: DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE: 5Ω Max
4. RESOLUTION: 1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

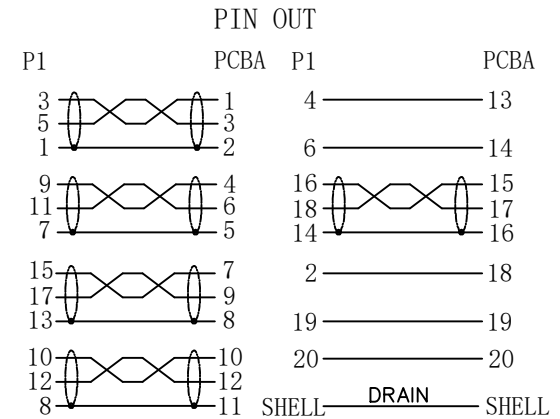

⑦	DUST CAP	HDMI A MALE DUST CAP	1	PCS
⑥	DUST CAP	MINI DP MALE DUST CAP	1	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	HDMI 19PIN MALE, TEH PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL+IC:PS8121E	1	PCS
②	CONNECTOR	MINI DP 20PIN MALE, THE PIN GOLD PLATED, WHITE INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(7/0.08TC*1P+7/0.08TC+FAM)*5+7/0.08TC*5C+AL-FOIL+D(7/0.08TC)+B(80/0.12AL-MG), BLACK PVC JACKET, OD:5.0±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference			
Designed by FLY	Checkde by HELEN	Approved by - date	File name	Date	Scale	FREE		
ANGLE:		MINI DP M-HDMI AM			26-7198		Edition 1	Sheet 1/1
UNIT:MM								