


P/N	L/mm	T/mm
26-2959	1000	30
26-2958	1800	30

ELECTRONIC TESTS:

1. OPEN/SHORT/INTERMITTENCE : 100% TEST
2. READ /WRITE SPEED TEST WITH SSD
3. READ >1500MBPS/S ;WRITE>1500MBPS/S;
4. SUPPORT PD3.0 5A 20V 100W

Chip Programming Information:

1. 26-2958 Support for 20V/5A, USB4 Gen2, 10G, and 2M TBT.
2. 26-2959 Support for 20V/5A, USB4 Gen2, 10G, and 1M TBT.

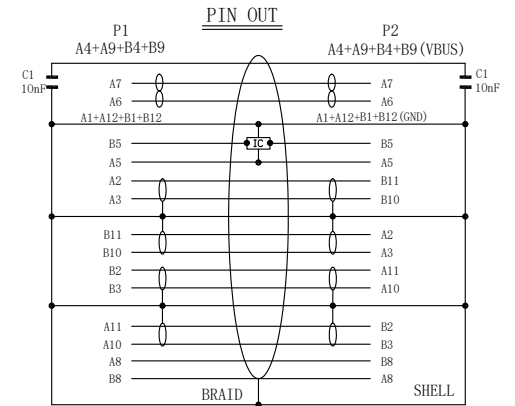

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑥	DUST COVER	TYPE C MALE DUST COVER	2	PCS
⑤	MOLDED	45P BLACK TPE		G
④	MOLDED	LDPE		G
③	CONNECTOR	TYPE C MALE, GOLD PLATED PIN, NICKEL PLATED SHELL+TINPLATE SHIELDING SHELL+IC:USB332D	1	PCS
②	CONNECTOR	TYPE C MALE, GOLD PLATED PIN, NICKEL PLATED SHELL+TINPLATE SHIELDING SHELL	1	PCS
①	CABLE	[(7/0.10TC)*1P+D(7/0.08TC)+AL+HM]*4C+(7/0.08TC)*1P+(7/0.08TC)*4C+(52/0.08TC)*2C+FILLER+D(41/0.08TC)+AL-FOIL+B(16*9/0.08T), BLACK TPE JACKET, OD:5.2±0.2mm MARKING: SUPER HIGH SPEED USB4	L	MM

Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 11. 26	Date 2025. 11. 26
ANGLE:	USB 3.2 Gen 2 TYPE C M/M		
UNIT:MM			
26-295X			Edition 1
			Sheet 1/1