


### Overview

### HPE Synergy Networking Adapters

The HPE Synergy Networking Adapters is a key element in HPE composable fabric connecting pools of compute resources to networks with reliable, high-performing Ethernet connectivity.

Provisioning and updating Synergy adapter is simple, reliable and fast using HPE Synergy's software-defined template-driven, frictionless operation. The HPE Synergy Composer automatically delivers proper firmware and driver coordination including staging updates for execution to avoid workload disruption

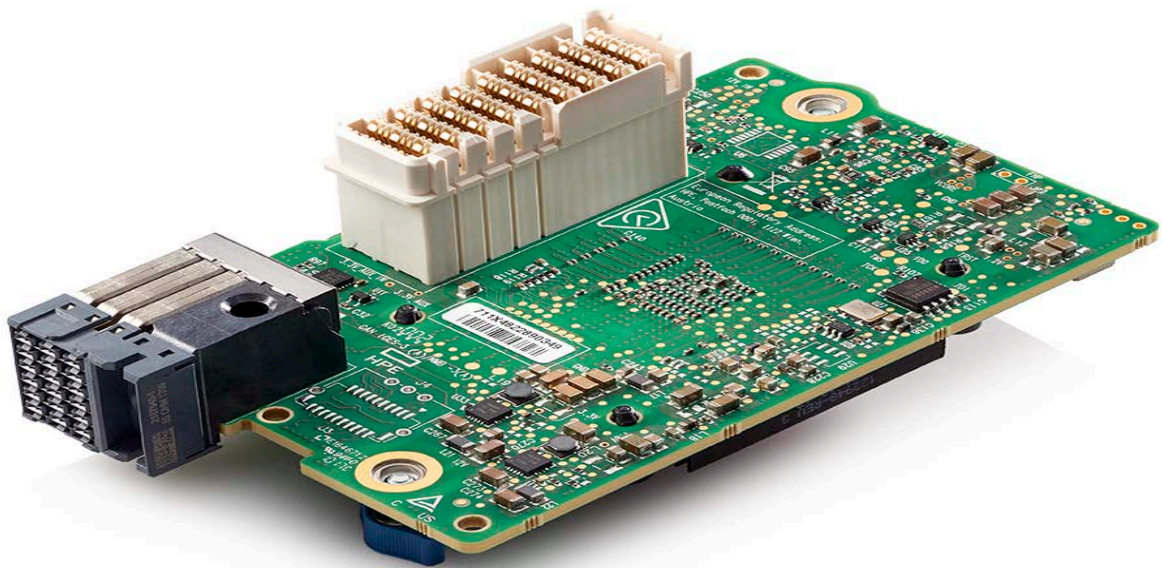

HPE Synergy Networking Adapters

## Platform Information

### Models

HPE Synergy 2820C 10Gb Converged Network Adapter	794538-B21
HPE Synergy 3820C 10/20Gb Converged Network Adapter	777430-B21
HPE Synergy 6410C 25/50Gb Ethernet Adapter	868779-B21
HPE Synergy 6810C 25/50Gb Ethernet Adapter	867322-B21
HPE Synergy 4610C 10/25Gb Ethernet Adapter	813890-B21
HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	876449-B21
HPE Synergy 6820C 25/50Gb Converged Network Adapter	P02054-B21

### Kit Contents

SKU	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
<b>Description</b>	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
Quick install card	√	√	√	√	√
Product warranty statement	√	√	√	√	√
<b>SKU</b>	876449-B21		P02054-B21		
<b>Description</b>	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter		HPE Synergy 6820C 25/50Gb Converged Network Adapter		
Quick install card	√		√		
Product warranty statement	√		√		

### Servers Support Table

SKU	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
<b>Description</b>	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
HPE Synergy 660 Gen10 Compute Module	√	√	√	√	√
HPE Synergy 480 Gen10 Compute Module	√	√	√	√	√
<b>SKU</b>	876449-B21		P02054-B21		
<b>Description</b>	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter		HPE Synergy 6820C 25/50Gb Converged Network Adapter		
HPE Synergy 660 Gen10 Compute Module	√		√		
HPE Synergy 480 Gen10 Compute Module	√		√		

### Operating System and Virtualization Support

The Operating Systems supported by this adapter are based on the server OS support matrix. Please refer to the OS Support Matrix at <https://www.hpe.com/us/en/servers/server-operating-systems.html>

**NOTE:** 4820C supports RHEL7.6 and newer for Red Hat Enterprise Linux. 4820C support SLES12 SP3 and newer for SuSE Linux.

**NOTE:** 6410C- OneView 4.1 or newer is required for support.

## Platform Information

### Related Option

Please refer to table below for supported synergy interconnect modules:

SKU	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
<b>Description</b>	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
HPE Virtual Connect SE 40Gb F8 Module for HPE Synergy	√	√			
HPE Synergy 40Gb F8 Switch Module	√	√			√
HPE Synergy 20Gb Interconnect Link Module	√	√			√ Operate at 10Gb
HPE Synergy 10Gb Interconnect Link Module	√	√			√ Operate at 10Gb
HPE Synergy 10 Gb Pass-Thru Module	√	√			√ Operate at 10Gb
Mellanox SH2200 TAA-compliant Switch Module for HPE Synergy			√	√	√
HPE VC SE 100Gb F32 Module					
HPE Synergy 50Gb Interconnect Link Module					

## Platform Information

SKU	876449-B21	P02054-B21
<b>Description</b>	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	HPE Synergy 6820C 25/50Gb Converged Network Adapter
HPE Virtual Connect SE 40Gb F8 Module for HPE Synergy	√	
HPE Synergy 40Gb F8 Switch Module	√	
HPE Synergy 20Gb Interconnect Link Module	√	
HPE Synergy 10Gb Interconnect Link Module	√	
HPE Synergy 10 Gb Pass-Thru Module	√	
Mellanox SH2200 TAA-compliant Switch Module for HPE Synergy	√	√
HPE VC SE 100Gb F32 Module	√	√
HPE Synergy 50Gb Interconnect Link Module	√	√

**NOTE:** for 2820C/3820C: Storage personality must be disabled on NIC intended for DPDK workload. DPDK and Storage modes cannot be used concurrently on current generation CNA NICs. HPE recommends using 2 separate NICS for Storage (Control Plane), and DPDK (Data Plane) workloads for the optimal high availability configuration. No DPDK with storage mode. No DPDK with VC interconnects.

**NOTE:** 4820C/6820C: Storage personality must be disabled on NIC intended for DPDK workload. DPDK and Storage modes cannot be used concurrently on current generation CNA NICs. HPE recommends using 2 separate NICS for Storage (Control Plane), and DPDK (Data Plane) workloads for the optimal high availability configuration. No DPDK with storage mode. Yes DPDK with VC interconnects.

## Standard Features

Standard Features Table					
SKU	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
<b>Description</b>	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
<b>Audit Logs</b>	√	√	√	√	√
<b>Authenticated Updates</b>	√	√	√	√	√
<b>Checksum &amp; Segmentation Offload</b>	√	√	√	√	√
<b>Configuration Utilities</b>	√	√	√	√	√
<b>Device-level Firewall</b>			√		√
<b>DPDK</b>			√	√	√
<b>HPE Sea Of Sensors 3D</b>	√	√	√	√	√
<b>HW Root of Trust</b>					
<b>IPv6</b>	√	√	√	√	√
<b>iSCSI( Hardware)</b>	√	√			
<b>iSCSI( Software)</b>	√	√	√	√	√
<b>FCoE</b>	√	√			
<b>Jumbo Frames</b>	9,000 KB	9,000 KB	9,600 KB	9,600 KB	9,600 KB
<b>Management Support</b>	√	√	√	√	√
<b>Message Signaled Interrupt (MSI-X)</b>	√	√	√	√	√
<b>Network Adapter Teaming</b>	√	√	√	√	√
<b>Network Partitioning (NPAR)</b>					
<b>Synergy Physical Functions</b>	4 per port	4 per port	1 per port	1 per port	1 per port
<b>NVMe-oF Ready</b>				√	
<b>Optimized for Virtualization</b>	√	√	√	√	√
<b>Precision Time Protocol (IEEE 1588 PTP)</b>	√	√	√	√	√
<b>LED Indicators</b>					
<b>Preboot eXecution Environment (PXE)</b>	√	√	√	√	√
<b>RDMA</b>			RoCE V1 RoCE V2	RoCE V1 RoCE V2 *iWARP	
<b>Receive Side Scaling (RSS)</b>	√	√	√	√	√
<b>Sanitization</b>	√	√	√	√	√
<b>Secure Boot</b>	√	√	√	√	√
<b>Server Integration</b>	√	√	√	√	√
<b>Single-Root I/O Virtualization</b>	√	√	√	√	√
<b>TCP/UDP/IP</b>	√	√	√	√	√
<b>Tunnel Offload</b>	VXLAN / NVGRE/ GENEVE	VXLAN / NVGRE/ GENEVE	VXLAN / NVGRE/ GENEVE	VXLAN / NVGRE/ GENEVE	VXLAN / NVGRE/ GENEVE

## Standard Features

Standard Features Table					
SKU	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
Description	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)	√	√	√	√	√
Wake-on-LAN	√	√	√	√	√
SKU	876449-B21		P02054-B21		
Description	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter		HPE Synergy 6820C 25/50Gb Converged Network Adapter		
Audit Logs	√		√		
Authenticated Updates	√		√		
Checksum & Segmentation Offload	√		√		
Configuration Utilities	√		√		
Device-level Firewall					
DPDK	√		√		
HPE Sea Of Sensors 3D	√		√		
HW Root of Trust					
IPv6	√		√		
iSCSI( Hardware)	√		√		
iSCSI( Software)	√		√		
FCoE	√		√		
Jumbo Frames	9,600 KB		9,600 KB		
Management Support	√		√		
Message Signaled Interrupt (MSI-X)	√		√		
Network Adapter Teaming	√		√		
Network Partitioning (NPAR)					
Synergy Physical Functions	8 per port		8 per port		
NVMe-oF Ready	√		√		
Optimized for Virtualization	√		√		
Precision Time Protocol (IEEE 1588 PTP)	√		√		
LED Indicators					
Preboot eXecution Environment (PXE)	√		√		
RDMA	RoCE V1 RoCE V2 *iWARP		RoCE V1 RoCE V2 *iWARP		
Receive Side Scaling (RSS)	√		√		
Sanitization	√		√		
Secure Boot	√		√		

## Standard Features

SKU	876449-B21	P02054-B21
<b>Description</b>	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	HPE Synergy 6820C 25/50Gb Converged Network Adapter
<b>Server Integration</b>	√	√
<b>Single-Root I/O Virtualization</b>	√	√
<b>TCP/UDP/IP</b>	√	√
<b>Tunnel Offload</b>	VXLAN / NVGRE/ GENEVE	VXLAN / NVGRE/ GENEVE
<b>VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)</b>	√	√
<b>Wake-on-LAN</b>	√	√
<b>NOTE: *- No iWarp and RoCE on same port</b>		

### 802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance.

Supports HPE Active Health System - monitors and records changes in the server hardware and configuration enabling customers to have accurate information that will assist in diagnosing problems and delivering rapid resolution when server failures occur.

### Audit Logs

Audit Logs are a forensics capability that provides traceability into authenticated firmware updates by capturing changes in standard system logs.

### Authenticated Updates

Authenticated Updates brings cryptographic keys onto the NIC (for HW Authentication) to protect user and configuration data from unauthorized access and verify digitally signed firmware.

### Auto-negotiation

Automatically senses the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router connected to the adapter.

### Checksum & Segmentation Offload

Normally the TCP Checksum is computed by the protocol stack. Segmentation Offload is technique for increasing outbound throughput of high-bandwidth network connections by reducing CPU overhead. The technique is also called TCP segmentation offload (TSO) when applied to TCP, or generic segmentation offload (GSO).

### Configuration Utilities

The adapter ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

### Device-level Firewall

Device-level Firewall blocks any unmanaged access to memory or storage. This ensures that on-device firmware and configuration data can only be accessed by authorized agents.

### DMA Coalescing

Supports DMA Coalescing, the incoming data packets and interrupts associated with these DMA calls are intelligently batched to keep the system devices in lower power states.

---

## Standard Features

### DPDK

DPDK with benefit for packet processing acceleration and use in NFV deployments.

---

### Fibre Channel over Ethernet (FCoE)

Combines the functionality of an industry-standard NIC with an industry-proven Fibre Channel to seamlessly converge the traffic over a shared lossless Ethernet network.

---

### iSCSI Offload

iSCSI is a protocol for transporting SCSI storage commands across an Ethernet network. The encapsulation of the commands into the TCP/IP packets is offloaded to the adapter instead of being processed by the host operating system, thus saving CPU cycles for other tasks.

---

### NVMe-oF

Non-Volatile Memory Express (NVMe) is a streamlined set of commands that allow communication to NVMe-enabled storage or memory devices. NVMe is optimized and supports only non-rotating memory such as SSDs for Flash storage.

NVMe over Ethernet Fabrics (NVMe-oF), which enables the transmission and of NVMe storage commands embedded in TCP/IP packets across a lossless Ethernet network.

---

### HPE Sea of Sensors3D

Support for the HPE Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can initiate fans and make other adjustments to reduce energy usage. A significant improvement lies in the ability to apply fan speed increases only to the portion of the system that is rising in temperature, rather than all six fans in unison, which reduces the amount of energy used for cooling.

---

### HW Root of Trust

Root of Trust enables a chain of trust for Authenticating updates to firmware via signature validation. This blocks installation of rogue or corrupted firmware and ensures that the executing firmware is trusted.

---

### Interrupt Coalescing

Interrupt coalescing (interrupt moderation) groups multiple packets, thereby reducing the number of interrupts sent to the host. This process optimizes host efficiency, leaving the CPU available for other duties.

---

### IPv6

IPv6 uses 128-bit addressing allowing for more devices and users on the internet. IPv4 supported 32-bit addressing.

---

### iWARP RDMA

Delivers RDMA on top of the pervasive TCP/IP protocol. iWARP RDMA runs over standard network and transport layers and works with all Ethernet network infrastructure. TCP provides flow control and congestion management and does not require a lossless Ethernet network. iWARP is a highly routable and scalable RDMA implementation.

---

### Jumbo Frames

Jumbo Frames (also known as extended frames), permitting up to a 9,600 byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over five times the size of a standard 1500-byte Ethernet frame. With Jumbo Frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

---

### LED Indicators

LED indicators show link integrity and network activity for easy troubleshooting.

---

### Load Balancing

Transmit Load Balancing (TLB) and Switch-assisted Load Balancing (SLB) are two advanced features that customers can use to build a bigger pipe for improved networking bandwidth.

---

---

## Standard Features

### Message Signaled Interrupt (MSI-X)

Message Signaled Interrupt provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores.

---

### Network Adapter Teaming

NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, the team of adapters can work together as a single virtual adapter, providing support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.

---

### Network Fault Tolerance (NFT)

Network Fault Tolerance, sometimes called "failover" or "NIC Redundancy," allows for the installation of multiple server adapters so that the active device can be backed up by a redundant adapter to improve availability. The Hewlett Packard Enterprise teaming utility also allows users to specify that when a failed adapter is fixed and replaced, the original adapter resumes its function as the primary network connection.

---

### Network Partitioning (NPAR)

Network Partitioning (NPAR) allowing administrators to configure a 10 Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.

---

### Optimized for Virtualization

I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads.

---

### Preboot eXecution Environment (PXE)

Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network.

Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.

---

### Precision Time Protocol (IEEE 1588 PTP)

Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

---

### RDMA

Remote Direct memory Access (RDMA) is an accelerated I/O delivery mechanism that allows data to be transferred directly from the user memory of the source server to the user memory of the destination server bypassing the operating system (OS) kernel. Because the RDMA data transfer is performed by the DMA engine on the adapter's network processor, the CPU is not used for the data movement, freeing it to perform other tasks such as hosting more virtual workloads (increased VM density). RDMA protocols include RoCEv1, RoCEv2 and iWARP. All of these protocols reduce overall latency to deliver accelerated performance for applications such as Microsoft Hyper-V Live Migration, Microsoft SQL and Microsoft SharePoint with SMB Direct.

---

### Receive Side Scaling (RSS)

RSS resolves the single-processor bottleneck by allowing the receive side network load from a network adapter to be shared across multiple processors. RSS enables packet receive-processing to scale with the number of available processors.

---

### Sanitization

Sanitization (Secure User Data Erase) renders User and configuration data on the NIC irretrievable so that NICs can be safely repurposed or disposed.

---

---

## Standard Features

### Secure Boot

Secure Boot safeguards the system and ensures no rogue drivers are being executed on start-up.

---

### Single-Root I/O Virtualization

Single-Root I/O Virtualization (SR-IOV) provides a mechanism to bypass the host system hypervisor in virtual environments providing near metal performance and server efficiency. SR-IOV provides mechanism to create multiple Virtual Functions (VFs) to share single PCIe resources.

---

### TCP/UDP/IP

TCP/IP offloading techniques including: TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

---

### Tunnel Offload

Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN, NVGRE and GENEVE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and virtualized overlay networks with minimal impact to performance. HPE Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. Tunnel Offload supports VMware's VXLAN, Microsoft's NVGRE solutions and Generic Network Virtualization Encapsulation (GENEVE) solutions.

---

### VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)

VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments. Windows Hyper-V VMQ (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine.

---

### Wake-on-LAN

A system that supports Wake-on-LAN can remain available to the systems administrator during its normal downtime. Once the machine is awakened, the systems administrator can remotely control, audit, debug, or manage the machine.

---

### Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

**NOTE:** Additional information regarding worldwide limited warranty and technical support is available at:

**<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>**

---

---

## Service and Support

### Service and Support

**NOTE:** This adapter is covered under HPE Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Support Services need to be purchased.

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

---

### Warranty and Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

---

### Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business. Protect your product, beyond warranty.

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services. The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### For more information

Visit the Hewlett Packard Enterprise Service and Support [website](#).

---

## Technical Specifications

<b>Technical Specifications Table</b>					
<b>SKU</b>	794538-B21	777430-B21	868779-B21	867322-B21	813890-B21
<b>Description</b>	HPE Synergy 2820C 10Gb Converged Network Adapter	HPE Synergy 3820C 10/20Gb Converged Network Adapter	HPE Synergy 6410C 25/50Gb Ethernet Adapter	HPE Synergy 6810C 25/50Gb Ethernet Adapter	HPE Synergy 4610C 10/25Gb Ethernet Adapter
<b>Network Processor</b>	Marvell 57840S	Marvell 57840S	Mellanox CX4	Marvell QL45604	Intel XXV710
<b>Data Rate</b>	2 port, each at 10/20Gb	2 port, each at 10/20Gb	2 port, each at 25/50Gb	2 port, each at 25/50Gb	2 port, each at 10/25Gb
<b>Bus Type</b>	PCIe 3.0 x8	PCIe 3.0 x8	PCIe 3.0 x16	PCIe 3.0 x16	PCIe 3.0 x8
<b>Power</b>	max<9W	max<9W	13W max	13W max	9W typical 9.8W max
<b>IEEE Compliance</b>	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.3p, 802.1q, 802.3ae, 802.3ap, 802.1p, 1588, 802.1Qaz, 802.1Qbb	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.3p, 802.1q, 802.3ae, 802.3ap, 802.1p, 1588, 802.1Qaz, 802.1Qbb	802.1p, 802.1Qaz, 802.1Qbb, 802.1AS, 802.3ad, 802.3by, 1588, 802.3-2012, 802.3by-2016, 802.1q	802.1p, 802.1Qaz, 802.1Qbb, 802.1AS, 802.3ad, 802.3by, 1588, 802.3-2012, 802.3by-2016, 802.1q	802.1p, 802.1Qaz, 802.1Qbb, 802.1AS, 802.3ad, 802.3by, 1588, 802.3-2012, 802.3by-2016, 802.1q
<b>Temperature</b>	<b>Operating</b> 0° to 55°C (32° to 131°F) <b>Non-Operating</b> -65° to 85° C (-85° to 185° F)				
<b>Humidity</b>	<b>Operating</b> 10% to 90% non-condensing <b>Non-operating</b> 5% to 95% non-condensing				

<b>SKU</b>	876449-B21	P02054-B21
<b>Description</b>	HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	HPE Synergy 6820C 25/50Gb Converged Network Adapter
<b>Network Processor</b>	Marvell QL45604	Marvell QL45604
<b>Data Rate</b>	2 port, each at 10/20/25Gb	2 port, each at 25/50Gb
<b>Bus Type</b>	PCIe 3.0 x16	PCIe 3.0 x16
<b>Power</b>	14W max	14W max
<b>IEEE Compliance</b>	802.1p, 802.1Qaz, 802.1Qbb, 802.1AS, 802.3ad, 802.3by, 1588, 802.3-2012, 802.3by-2016, 802.1q	802.1p, 802.1Qaz, 802.1Qbb, 802.1AS, 802.3ad, 802.3by, 1588, 802.3-2012, 802.3by-2016, 802.1q
<b>Temperature</b>	<b>Operating</b> 5° to 70°C (41° to 158°F) <b>Non-Operating</b> -40° to 70° C (-40° to 158° F)	
<b>Humidity</b>	<b>Operating</b> 10% to 90% non-condensing <b>Non-operating</b> 5% to 95% non-condensing	

### No Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

Date	Version History	Action	Description of Change
07-Oct-2019	Version 4	Updated	Updated standard features & compatibility sections
03-Sep-2019	Version 3	Changed	Add 6820C adapter
06-May-2019	Version 2	Changed	Update glossary and technical specifications
02-Apr-2019	Version 1	New	New QuickSpecs



**Sign up for updates**



**Hewlett Packard  
Enterprise**

© Copyright 2019 Hewlett Packard Enterprise Development L.P. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a00043968enw - 16198 - Worldwide - V4 - 07-October-2019