

IRG5500 Cellular LTE Routers

Enterprise-Class Edge Cellular Routers & Gateways



- LTE Router for Primary or Failover Connectivity
- Out of band management for remote troubleshooting
- LTE-Advanced (LTE-A and LTE-A Pro) for 10x faster downlink speeds and 3x faster uplink speeds
- **Cloud Hosting** -- Deploy and manage your network from the cloud
- 2-port or 4-port 10/100/1000 Ethernet
- Network connectivity via LTE, Wi-Fi, Ethernet, USB 3.2, and Serial
- RS232, RS485, Alarm Relay, and multiple I/O to connect equipment
- Advanced feature set with NO Annual Fees

Perle IRG5500 LTE Routers and Gateways have the most comprehensive set of features, functionality, and performance to provide **primary or failover back-up connectivity** to remote infrastructure and assets. These ultra-low-power, rugged, high-performance Cellular Routers, with dual-SIM slots, also have models with WLAN capabilities making them a single network point of contact for fast deployments. And, there is no need for training because an IRG5500 Router comes with an intuitive web GUI. For advanced admin scrips, CLI commands are also available.

Perle IRG5500 Routers provide **fast, secure, and reliable managed LTE network connectivity** where wired options are impossible to deploy or require a backup. This is crucial for enabling a wide range of applications while ensuring the highest degree of security to protect the integrity of critical services. Reduce the cost of downtime and service calls, and bringing distributed sites online faster. With support for **Data, SMS, Voice, and Video**, an IRG5500 and can be integrated into any enterprise cloud, building, industrial, or mobile location network infrastructure.

- Building and process automation controllers, Internet of Things (IoT)
- Smart grid assets (meters, switches, controllers), Telco infrastructure controllers
- SCADA, Distribution management systems, Remote data loggers, flow meters, sensing equipment
- Digital signage, ATMs, POS, Kiosks, Temporary "pop-up" stores
- Video surveillance controllers, IP cameras, Mobile hotspots
- Fleet management, GPS/GNSS Location tracking, Taxis, Public Service Vehicles, vehicle area networking (VAN)
- Public Service Vehicles, First responders, Command Centers
- Transit systems, Buses, Metro Subways, Railways

IRG5521 LTE Router



IRG5541 LTE Router



Awards won:



Cellular Band Operation Certified Worldwide over 4G LTE, DC-HSPA+, HSPA+, HSPA, and UMTS (WCDMA)

Perle IRG5500 Routers and Gateways have three cellular options to ensure **support for your carrier's primary bands** in deployment areas:

1. **IRG5500+**: LTE-A PRO CAT12. 600Mbps downlink and 150Mbps uplink speeds. Support for 24x LTE Bands and 9x UMTS/WCDMA Bands
2. **IRG5500**: LTE-A CAT6. 300Mbps downlink and 50Mbps uplink speeds. Support for 15x LTE Bands and 6x UMTS/WCDMA Bands
3. **IRG5500+ FN**: FirstNet Ready™ support for Band 14 (B14). LTE-A PRO CAT12. 600Mbps downlink and 150Mbps uplink speeds. Support for 24x LTE Bands and 8x UMTS/WCDMA Bands

Edge Routers with Enterprise-Grade Routing Capabilities

Perle does not charge any annual subscription or license fees to maintain operation, download software updates, or access features. IRG5500 routers have all the of the advance routing functionality found in the most advanced enterprise routers. **Extensive protocol routing support** means they can be easily deployed in hierarchical or large mesh network structures. A fast CPU and lots of memory ensure the router can handle a consistent and heavy workload all day long.

- RIP, RIPv2, RIPng, OSPFv1/2/3, BGP-4, VRRP
- When BGP peering with multiple ISPs, the IRG5500 delivers carrier-grade routing performance capable of handling the full Internet routing table
- IPv4 & IPv6
- OpenVPN & IPsec VPN
- DHCP & DHCPv6
- IP Passthrough for deployments requiring the router to operate in Gateway or Bridge mode
- Route between any interface (LTE, WLAN, Ethernet, USB, or serial RS232)
- Reduce unwanted network traffic by creating collision and/or broadcast domains




Integrated Zone-Based Policy Firewall

The IRG5500 built-in firewall offers intuitive policies for multiple-interface routers to **protect inside networks from unauthorized access** by users on an outside network. The firewall also protects inside networks from each other, for example, by keeping a human resources network separate from a user network. If there are network resources that need to be available to an outside user, such as a web or FTP server, these resources can be placed on a separate network behind the firewall, in a demilitarized zone (DMZ). The firewall will allow limited access to the DMZ, but because the DMZ only includes the public servers, any attacks there will not affect the inside network. The firewall controls when inside users access outside networks (for example, access to the Internet), by allowing only certain addresses out, by requiring authentication or authorization, or by coordinating with an external URL filtering server. A deny-all (blacklist) policy can be used to prohibit traffic between firewall security zones until an explicit policy is applied to allow desirable traffic. Router ports are assigned to zones and firewall inspection policies are applied to traffic moving between the zones. Firewall inter-zone policies come with considerable flexibility and granularity so that different firewall inspection policies can be applied to the same router port.

High Availability Access and Enhanced Security with 2 Factor Authentication

With multiple concurrent VPN sessions and 2 Factor Authentication, Perle IRG5500 Routers enable secure communications to multiple back-end systems.

- Remote authentication (RADIUS, TACACS+, LDAP) management, integrates with enterprise-grade systems to control access to devices in the field.
- Software image CRC control protects the software upgrade process against unwanted software corruption and malware
- High-speed OpenVPN, IP Security (IPsec), Triple Data Encryption Standard (3DES), and Advanced Encryption Standard (AES) encryption for data privacy over the Internet.
- Intrusion prevention enforces security policies in a large enterprise or service provider networks.
- Perle's cloud-based centralized management solution puts all your network and IT infrastructure into a single application and provides secure reliable access and visibility during normal operations and critical network failures. Scalable to suit any business requirement, **Cloud Centralized Management** reduces human error and guarantees repeatability.

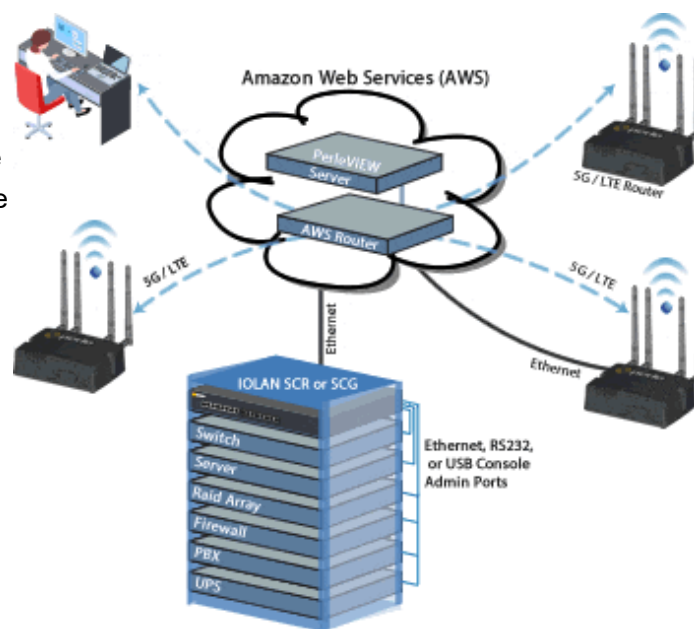

GPS / Global Navigation Satellite System (GNSS) Included

GPS and GNSS (Galileo, Glonass, and Beidou) are included by default in all IRG5500 Routers and Gateways. This enables **real-time location tracking** of remote assets. Also, you can get **real-time network clock updates** in the router, or any attached equipment, for accurate time-stamp usage in time-sensitive applications.

Cutting-edge design certified for a wide range of deployment scenarios

High-performance components and features enable customers to take advantage of broadband network speeds while running **secure concurrent data, voice, and video services**. All IRG5500 routers have **high MTBF rates** because they are developed with certified high-end components to provide superior reliability and uninterrupted operation.

Primary or failover back-up connectivity

Perle is the only company to offer LTE edge routers with all of the enterprise-grade features and protocols needed to be a fully functional primary or failover back-up LTE Router. If the main network connection goes down for any reason, Perle IRG5500 routers provide an always-on, cost-effective redundant connection. As a failover solution, wireless speeds are fast enough to keep your network humming and distributed enterprises can enjoy the same reliability and competitive advantage as large enterprises. The relatively low cost of LTE for branch continuity means a greater return on investment and scalability for multiple locations. Simply put, an IRG5500 LTE Router ensures maximum uptime, cost-effective scalability, and ease of deployment and management with limited IT resources.

Compact light-weight design

Deploy in many different environments where space, heat dissipation, and low power consumption are critical factors. The optional DIN-Rail mounting brackets or wall-mount brackets ensure easy installation.



Ultra-Low-Power

IRG5500 LTE Routers are designed to operate on limited power sources by consuming less than 1 Watt in idle mode. This makes them ideal for battery and solar applications. In addition, Standby Mode can be used to protect power sources by dropping power consumption to a target of 53 mW. This can be triggered by timers, low voltage detection, or I/O. IRG5500 Routers also work with the existing power infrastructure in 2G/3G deployments that are migrating to LTE thus, eliminating the need to invest in replacement equipment.

Rugged Environment Certifications

- Rugged die-cast aluminum IP54 enclosure for dust & water ingress
- Shock and vibration resistance certified to MIL-STD-810G, SAE J1455 & EN 61373
- Hazloc per IECEx/IECx, ATEX, & ANSI/ISA Class 1 Div 2
- -40°C to +70°C operating temperature
- **NERC CIP** – Compliance Features

Vehicle Deployment

- Cellular tower connectivity can be established and maintained at up to 100 meters per second (360km/224mi per hour)
 - E-Mark Certification, ISO 7637-2, and ISO 16750-2 Compliance
 - Built-in battery charge protection, with no requirement for external power conditioning, to safeguard vehicle operation
 - Vehicle awareness applications can be used to remotely monitor vehicle speed, acceleration, position, and more.
 - Ignition Power Management can schedule a delayed shutdown or startup of the IRG5500 based on the vehicle ignition status
-

FirstNet Ready™ Deployments

Built for first responders and field personnel, the **IRG5500+ FN LTE Routers are certified Band 14 and FirstNet Ready™**. With long range Gigabit Wi-Fi and Gigabit Ethernet, and up to 600 Mbps downlink and 150 Mbps speeds over LTE-Advanced Pro, fleets can be united with the enterprise network to enable multiple field applications to work simultaneously, further and faster from the vehicle than ever before. Host up to 128 simultaneous Wi-Fi clients, and concurrently connect multiple mission critical applications in and around the vehicle including laptops, DVRs and tablets. Additionally, live video streaming, and rapid and secure access to remote databases, such as record management systems makes the IRG5500+ FN ideal.

Railway Deployment

Perle IRG5500 Routers and Gateways are fully approved and certified for Railway rolling stock application deployments. They are perfectly suited for installation directly in the train or subway cabin, the dusty and humid environments of metro tunnels or, the enclosures found alongside rail tracks.

- European Certifications EN50155 & EN50121
 - International Certifications IEC60571 & IEC62236
 - Cellular tower connectivity can be established and maintained at up to 100 meters per second (360km/224mi per hour)
-

Dual-SIM LTE Failover for true Business Continuity

Perle IRG5500 Routers and Gateways come with redundant SIM slots to ensure reliable network connectivity and cellular multihoming support in LTE and HSPA-based networks. This is particularly useful:

- When the primary carrier contract data cap has been exceeded, the IRG5500 will automatically switch over to a back-up data plan.
- When the IRG5500 is deployed in a mobile environment long-distance roaming can be enabled and used.
- When there is a lack of coverage, or carrier network failure, the IRG5500 will automatically switch over to a back-up carrier.

Dual-band WiFi Models available with Integrated WLAN Access Point

Integrated Wi-Fi (**up to 866Mbps**) for LAN connectivity allows up to 128 simultaneous clients to work concurrently. Integrates 802.11 a/b/g/n/ac Access Point for mission-critical applications. The 2X2 MIMO Access Point creates a self-healing, self-optimizing wireless network.

More Features and Benefits

WAN Connectivity

LTE, 10/100/1000 Ethernet, & WiFi

Central Management Configuration

Perle IRG5500 Routers and Gateways use **PerleView**, a web-based server configuration tool that simplifies setup and deployment. Centralized management capabilities give network managers visibility and control over network configurations at remote sites. Other Perle IRG5500 management capabilities include:

- Fast Setup - Available when the router is in factory default (initial) configuration
- Web Manager - Available using a browser
- CLI - Command Line Interface
- SNMP - Using a Network Management System
- **No ongoing monthly or yearly licensing fees.**

Serial Port

Perle IRG5500 Routers come with an IOLAN Secure Device Server built-in for a secure serial to IP (Ethernet/LTE) connectivity applications. This makes it ideal for applications that require remote device console management, data capture, or monitoring. Some of the supported applications are:

- **TrueSerial® packet technology** delivers the most authentic serial connections across Ethernet for serial protocol integrity.
- Serial Port Access: connect directly using Telnet / SSH
- Terminal Server: Telnet, SSH, Rlogin, LPD, RCP printer
- Serial machine to IP (Ethernet)
- Raw serial data over Ethernet/LTE/TCP/IP/UDP
- Virtual modem simulation
- TruePort redirector
- ModBus, DNP3 and IEC-870-5-101 encapsulation
- Line access permissions via TACACS+ and RADIUS servers
- Dial direct serial: PPP, PAP/CHAP, SLIP

Software Feature Set: IRG5500 Cellular LTE Routers

All features and functionality are included in the base price of the product. There are no additional costs or fees.

Functionality
Gateway (IP Passthrough Bridging), Switching, Routing

Routing / Switching Protocols
• IPv4/IPv6 • Static Routing • RIP/RIPNg • NAT • OSPFv3 • BGP-4 • IPv6 Encapsulations (GRE, 6in4) • VRRP • Port Routing • STP • MSTP • PPPoE V6 • LLDP
IP Applications
• DDNS, DNS Proxy / Spoofing, relay, client, Opt. 82 • NTP & SNTP (versions 1, 2, 3, 4) with support from GPS, GNSS & Network Carrier timing • DHCP / DHCPv6 server & BOOTP for automated network-based setup
VLAN & VPN
VLAN, IPSec, OpenVPN, VPN Failover (16 concurrent VPN tunnels)
GPS & GNSS Reports
GPS for tracking equipment over RS232, USB, and Ethernet NMEA 0183 v3.0, TAIP, CSV
LTE & Wi-Fi Applications
Private LTE / CBRS - ability to select a specific band for LTE connection Wi-Fi Hot Spot (for models with optional WLAN support)

Firewall & Security

- Built in Zone-Based Policy Firewall
- Access Control Lists (list & ranges & time)
- Filter based on MAC Address, IP, Port, Protocol, User
- **AAA**, LDAP, Radius, TACACS+
- 802.1x
- Layer 2 MAC address filtering
- Certificate Support (X.509)
- Port Forwarding
- BGP Communities

Security Features

- Security via remote authentication (LDAP, Radius and TACACS+)
- Trusted host filtering (IP filtering), allowing only those hosts that have been configured in the host table access to the router.
- Idle LTE port timers, which close a connection that has not been active for a specified period of time
- Ability to disable services (for example, Telnet, TruePort, Syslog, SNMP, Modbus, HTTP) for additional security
- Ability to individually disable network services that won't be used by the SSH client/server connections (SSH 1 and SSH 2)
- Logging via syslog
- Ability to disable Ping responses
- Ability to setup Access Lists (ACL's) to restrict traffic
- Ability to set up firewalls to restrict incoming and outgoing packets
- SSH client/server connections (SSH 1 and SSH 2)
- SSL/TLS client/server data encryption (TLSv1/1.1/1.2 and SSLv2)
- Ability to setup Virtual Private Networks (VPNs)
- Wireless Security; WEP, WPA2-PSK & Enterprise (EAP, PEAP, LEAP), 802.11i
- Wireless cellular security using PAP or CHAP authentication
- Dynamic DNS with DYNDNS.org
- Domain Name Server (DNS) support
- Email alert notification
- SSH connections (supported ciphers are Blowfish, 3DES, AES-CBC, AES-CTR, AES-GMC, CAST, Arcfour and ChaCha20-Poly1305)
- SSL/TLS connections
- RIP authentication (via password or MD5)
- OSPF
- 2F Authentication
- Management Access Control
- SNMPv3
- DMZ
- Secure HTTP/HTTPS/FTP/Telnet Authentication Proxy

Logging, Reporting & Alerts

- Sys Log
- Event Type
- Report Type
- Alerts & Monitoring
- Triggers Status Screen Report
- Data Usage
- Diagnostic

Management

- **PerleVIEW Management**, WEB (HTTP/HTTPS), SNMPv1/v2/v3, RESTful API, SMS Control, Load Balancing, CLI/Piping, Login Banner, E-mail, Ping, Telnet, FTP, Connection on Demand
- **Network Assist**: This Windows-based desktop application helps busy IT managers configure and monitor the status of deployed Perle devices.
- Automatic check for software updates.
- Software updates available over FTP, HTTP, HTTPS, SCP, SFTP, and TFTP

OCI Container (Docker-based) implementation

Perle's OCI Containers are based on the Docker platform and add native Docker capabilities to all IRG Routers. It supports public and private container registries such as Docker Hub, Amazon ECR, Opencontainers, GitHub, BuildKit, Podman, and Buildah. Perle IRG Routers provide the ideal framework to provision, manage, and run any application or container found, or built, in these registries.

- Run **all OCI Container types**:
 - Runtime Specification (runtime-spec),
 - Image Specification (image-spec)
 - Distribution Specification (distribution-spec)
- Multiple OCI Containers can run simultaneously
- OCI Containers can be accessed on private and public registries

Power Management (General)

Power Processor Saving Mode – this feature optimizes idle power consumption, saving energy by reducing performance where possible.

Power Saving Features including:

- LED power saving mode
- Smart Standby Mode
- Power saving strategies such as turning off unused interfaces (USB, Serial, Ethernet)
- Turning off GPS and adjusting the Ethernet rate

Operating Power Modes

- Standard – When power is applied to the router, it will power up. All inputs are ignored (from a power up and Smart Standby perspective). This is the default.
- Smart Standby Mode – you can configure a combination of one or two user defined conditions to determine when the router is powered up and when it goes into Smart Standby Mode.

Power Management (Ignition Sense)

Configurable time delay for shutdown / start based on vehicle ignition status

Low Voltage Standby function to prevent battery drain

Operating Power Mode (Ignition mode) – this mode monitors the ignition input and goes in and out of Smart Standby based on the voltage of the ignition input. When the voltage on the ignition input goes below a user pre-defined threshold, the router will be powered down into Smart Standby Mode. When the voltage on the ignition input goes above the Perle Wireless LTE Router pre-defined value the power will be restored. You can configure a combination of inputs and schedule to control Smart Standby Mode.

GPIO Capabilities

One GPIO configurable as high side pull-up / dry contact, analog input, digital input, low side current sink output, digital output/open drain, or Pulse Counter

One GPIO configurable as Vehicle ignition sense or analog input

Two Digital Inputs configurable as high side pull-up / dry contact, digital input, or Pulse Counter

One normally open (NO) relay contact

Serial Port Capabilities

Access: connect directly using Telnet / SSH

Terminal Server: Telnet, SSH v1 and v2, Rlogin, Auto session login, LPD, RCP printer

Serial to Ethernet: Tunnel raw serial data across Ethernet - clear or encrypted, RAW serial data over TCP/IP/UDP, packetized data, virtual modem, TruePort com/tty redirector, TrueSerial packet technology, RFC2217 transport & RS232 control signals

Industrial Protocols Encapsulations: ModBus, DNP3 and IEC-870-5-101, ModBus TCP Gateway

Remote Access: PPP, PAP/CHAP, SLIP

Products can be purchased with or without antennas and with or without power cords. All functionality is included in the base price of the product. Additional accessories are sold separately.

Specifications				
2 Year Return to Factory Warranty	Reach, RoHS and WEEE Compliant	HTSUS Number: 8517.62.0020	UNSPSC Code: 43222609	ECCN: 5A992
				
Cellular				
LTE	IRG5500 LTE-A CAT6. 300Mbps downlink and 50Mbps uplink speeds	IRG5500+ LTE-A PRO CAT12. 600Mbps downlink and 150Mbps uplink speeds	IRG5500+ FN FirstNet Ready™ certified for Band 14 (B14). LTE-A PRO CAT12. 600Mbps downlink and 150Mbps uplink speeds	
Frequency Bands (4G / LTE)	IRG5500 4G/LTE Bands (15) 2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 2600(B7), 900(B8), 700(B12), 700(B13), 800(B20), 1900(B25), 850(B26), 700(B29), 2300(B30), TDD B41	IRG5500+ 4G/LTE Bands (24) 2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 2600(B7), 900(B8), 1800(B9), 700(B12), 700(B13), 850(B18), 850(B19), 800(B20), 850(B26), 700(B28), 700(B29), 2300(B30), 1500(B32), TDD B41, TDD B42, TDD B43, TDD B46, CBRS B48, 1700(B66)	IRG5500+ FN 4G/LTE Bands (24) 2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 2600(B7), 900(B8), 1800(B9), 700(B12), 700(B13), 700(B14), 850(B18), 850(B19), 800(B20), 850(B26), 700(B29), 2300(B30), 1500(B32), TDD B41, TDD B42, TDD B43, TDD B46, CBRS B48, 1700(B66)	

Data & SMS Operation over 4G LTE with fallback networks DC-HSPA+ / HSPA+ / HSPA / UMTS (WCDMA)	IRG5500 3G HSPA/HSPA+ Bands (6) 2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 900(B8)	IRG5500+ 3G HSPA/HSPA+ Bands (9) 2100(B1), 1900(B2), 1800(B3), AWS(B4), 850(B5), 800(B6), 900(B8), 1700(B9), 850(B19)	IRG5500+ FN 3G HSPA/HSPA+ Bands (8) 2100(B1), 1900(B2), AWS(B4), 850(B5), 800(B6), 900(B8), 1700(B9), 850(B19)
Public Safety Bands	IRG5500 Band 26	IRG5500+ Bands 26, 28	IRG5500+ FN Bands 14, 26
Cellular Antenna	• Frequency Range: 704-902-928-960/1427.9-1575.42/1710-2170/2400-2480-2690MHz • Gain: 3 dBi • Impedance: 50 ohm • Voltage Standing Wave Ratio: <3.0 (typical) • Radiation: Omni-Directional • Connector: SMA Male (Swivel) • Dimensions: 135.6 x 20.1 mm / 5.34 x 0.8 in		
SIM	Dual Mini-SIM 15 x 25mm (or 2FF)		
GPS / GNSS			
GPS / GNSS	• Wide-band GNSS: 1559-1606 MHz • GPS: 1575.42 MHz / GLONASS: 1602 MHz / BeiDou: 1561.098 MHz / Galileo: 1575.42 MHz / QZSS: 1575.42 MHz • Simultaneous tracking: Up to 30 channels • Active GNSS antenna support • Reports: NMEA 0183 V3.0, TAIP		
GPS / GNSS Passive Antenna	• GNSS Applications: GPS, Glonass, Galileo, Beidou • Frequency Range: 1561MHz~1606 MHz • Gain: 4 dBi (typical) • Impedance: 50 Ohm • Voltage Standing Wave Ratio: 2.0 (typical) • Polarization: RHCP • SMA (M) straight • Dimensions: 41.9 x 47.3 x 16.3 mm / 1.65 x 1.86 x 0.64 in • RG-174 Cable Lenght: 5 m / 16.4 ft		

Wi-Fi			
Models with Integrated Wi-Fi	IRG5500 IRG5521 IRG5541	IRG5500+ IRG5521+ IRG5541+	IRG5500+ FN IRG5521+ FN IRG5541+ FN
LAN Standards	IEEE 802.11ac complaint & backward compatible with 802.11a/b/g/n		
Topology	Infrastructure (AP) and up to 128 Client modes		
Radio	Dual-Band Radio ; 2.4GHz and 5GHz 20, 40Mhz SISO 2.4-GHz		
Data Rate	up to 867Mbps		
Security	WEP, WPA-PSK, WPA2-PSK & Enterprise (EAP, PEAP, LEAP), 802.11i (includes hardware-accelerated Advanced Encryption Standard [AES]), 802.1x supplicant		
WLAN Antenna (optional accessory)	• Frequency Range: 2.4GHz & 5GHz • Gain: up to 3 dBi • Impedance: 50 ohm • Voltage Standing Wave Ratio: 2.0 (typical) • Radiation: Omni-Directional • Connector: RP-SMA (Swivel) Female • Dimensions: 109 x 10.1 mm / 4.3 x 0.4 in		
10/100/1000 Mbps Ethernet RJ45 Copper			
Models with 2x 10/100/1000 Ports	IRG5500 IRG5521	IRG5500+ IRG5520+ IRG5521+	IRG5500+ FN IRG5521+ FN
Models with 4x 10/100/1000 Ports	IRG5500 IRG5540 IRG5541	IRG5500+ IRG5540+ IRG5541+	IRG5500+ FN IRG5541+ FN
Speed	Software selectable 10/100/1000 Ethernet Auto Software selectable Half/Full/Auto duplex		
Ethernet Isolation	1.5Kv Magnetic		

Standards	IEEE 802.3 for 10Base-T, IEEE 802.3u for 100Base-TX and 100Base-FX, IEEE 802.3ab for 1000Base-T, IEEE 802.3x for Flow Control
Processing Type	Store and Forward
MAC Address Table Size	8K
VLAN ID range	1 to 4000
USB	
USB-C	1 x USB 3.2 Type-C with a transfer rate up to 5Gbps - Console Port or Ethernet over USB
Serial	
RS232 Serial	1 x RS232 DB9 female connector - Serial Port Speeds: 300bps to 230Kbps with customizable baud rate support - Data Bits: 5,6,7,8-bit protocol support - Parity: Odd, Even, Mark, Space, None - Flow Control: Hardware, Software, Both, None - Serial Port Protection: 15Kv Electrostatic Discharge Protection (ESD) - Processing Type - Store and Forward
RS485 Serial	half-duplex
Power and Auxillary Connectors	
One GPIO Input	- Digital Input & Pulse Counting VDC: 0 for $\leq 1V$, 1 for $\geq 2.7V$ - Dry Contact Max Current range: min 0.6mA @ 7V and max 3.5mA @ 36V - Current Sink Output: 0.5A @ 12v
Ignition Sense	Analog Input: 0.5V to 36V
Two Digital Inputs	Digital Input & Pulse Counting VDC: 0 for $\leq 1V$, 1 for $\geq 2.7V$
One Alarm Relay	Normally Open (NO) dry contact: 1A @ 24VDC
Platform Specifications	
Microprocessor	Dual Core Cortex-A53 64bit ARMv8 1.2GHz

RAM	1GB DDR4
Flash	4GB MMC
LED Indicators	• Power: indicates power status • Serial: indicates serial RS232 connection status and Tx data • WWAN: indicates Wireless Wide Area Network status • GNSS: indicates Global Navigation Systems for GPS, Galileo, Glonass and Beidou status • VPN: indicates VPN presence (IRG5520+ , IRG5540, IRG5540+) • WLAN: indicates Wireless LAN status (IRG5521, IRG5521+, IRG5541, IRG5541+) • Internet: indicates Internet connectivity
Environmental Specifications	• Operating Temperature: -40°C to 70°C / -40°F to 158°F • Storage Temperature: -40°C to 85°C / -40°F to 185°F • Operating Humidity: 0% to 95% non-condensing • Storage Humidity: 0% to 95% non-condensing • Operating Altitude: 3048 m / 10,000 ft • Cooling: EN 60068-2-1 • Dry heat: EN 60068-2-2 • Damp: EN 60068-2-30 • MTBF (no Wi-Fi): > 234,435 hours • MTBF (with Wi-Fi): > 192,137 hours • (Calculation model based on MIL-HDBK-217-FN2 @ 30°C/86°F) • Heat Output (BTU/HR)
Enclosure	Die Cast Aluminium
Mounting	• Desktop, Panel, or wall mount • DIN Rail attachment bracket is optional. • (Mounts to standard 35 mm DIN rail in accordance with DIN EN 60175 vertically or horizontally)
Ingress Protection Rating	IP54

Power			
Power/Current Consumption Typical Use (connected/with Activity)	IRG5500 IRG5521: 0.37A / 4.4W IRG5540: 0.34A / 4.07W IRG5541: 0.39A / 4.70W	IRG5500+ IRG5520+: 0.35A / 4.22W IRG5521+: 0.40A / 4.79W IRG5540+: 0.38A / 4.52W IRG5541+: 0.42A / 5.09W	IRG5500+ FN IRG5521+ FN: 0.40A / 4.79W IRG5541+ FN: 0.42A / 5.09W
	Note: up to 0.08A / 1W more in power savings can be achieved through shutting down the USB port, LEDs, GPS, as well as turning down router processor speed		
Power/Current Consumption Idle Mode (connected/no Activity)	IRG5500 IRG5521: 0.35A / 4.16W IRG5540: 0.32A / 3.86W IRG5541: 0.37A / 4.46W	IRG5500+ IRG5520+: 0.32A / 3.84W IRG5521+: 0.36A / 4.37W IRG5540+: 0.35A / 4.14W IRG5541+: 0.39A / 4.67W	IRG5500+ FN IRG5521+ FN: 0.36A / 4.37W IRG5541+ FN: 0.39A / 4.67W
Power/Current Consumption	All models: 3.9mA / 46.8mW		
Power Input	12/24 VDC Nominal (7 to 36 VDC Range)		
Ignition Sense	VDC voltage variation with On/Off and timer		
External Power Supply (optional)	110 / 220 VAC Power supply		
Power Connector			
Power Line Protection	Surge: 8KV (EN61000-4-5 common mode), 2KV (EN61000-4-5 differential and common modes)		
Reverse polarity protection	YES		

Vehicle Transient voltage protection	Built-in protection against voltage transient including 5 VDC engine cranking and +200 VDC load dump		
Weight & Dimensions			
Product Weight & Dimensions	Weight: 0.59 Kg / 1.30 lb Dimensions: 146 x 99 x 45 mm / 5.75 x 3.89 x 1.77 in		
Shipping Weight & Dimensions	Weight (with Antenna): 1 Kg / 2.20 lb Weight (without Antenna): 0.79 Kg / 1.74 lb Dimensions: 270 x 170 x 70 mm / 10.63 x 6.70 x 2.75 in		
Regulatory Approvals			
Cellular/Telecom Regulatory Approvals	IRG5500 FCC/ICES, RED, PTCRB/CTIA, CE	IRG5500+ FCC/ICES, RED, PTCRB/CTIA, CE	IRG5500+ FN FCC/ICES, PTCRB/CTIA
Carrier Certifications	IRG5500 AT&T Verizon IRG5500 T-Mobile for Wholesale T-Mobile for Business	IRG5500+ AT&T Verizon IRG5500+ T-Mobile for Wholesale T-Mobile for Business	IRG5500+ FN AT&T
Shock & Vibration	SAE J1455 (Vibration: Section 4.10.4.1 and 4.10.4.2 Cab Mount, Shock: Section 4.11.3.4 Operational Shock) MIL-STD-810G (Shock: test method 516.6. Operational Vibration: test method 514.6) EN 61373 (Shock, Vibration long-life / functional-random)		
Hazloc	IECEx/IECx, ATEX/Ex Class 1 Zone 2, Directive 2014/34/EU ANSI/ISA 12.12.01, Class 1 Division 2 Groups A-D, ISA 12.12.01-2015		
Vehicle Usage	E-Mark (UN ECE Regulation 10.04, ISO 7637-2:2011 and ISO 16750-2:2012)		
Velocity	< 100m/s		

Railway	• EN 50155: 2017 Clause 4.3.6 • EN 50121-1: 2017 • EN 50121-3-2: 2016 • EN 50121-4: 2016 • IEC 60571:2012 For Clause 12.2.8 & 12.2.9 • IEC 62236-1: 2018 • IEC 62236-3-2: 2008 • IEC 62236-4: 2018
Emissions	• FCC 47 Part 15 Subpart B, Class B • ICES-003 Issue 6 Class B (Canada) • FCC Part 15.247 Subpart C (2.4 Ghz) • FCC Part 15.407 Subpart E (5 Ghz) • ANSI C63.4 Class B (Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz) • EN61000-3-2: 2014 (Limits for Harmonic Current Emissions) • EN61000-3-3: 2013 (Limits of Voltage Fluctuations and Flicker) • CISPR 32 / EN 55032
Immunity	• CISPR 25:2016/EN55025: (Vehicles, boats and internal combustion engines - RDC) • CISPR 35 / EN 55035 • EN 61000-4-2:2009 (ESD) +/-8 kV (Contact) +/-15 kV (Air) Operating mode: powered on • EN 61000-4-3: 2006 + A1:2007 + A2:2010(RS) • EN 61000-4-4:2012 (EFT) 2 KV (Criteria A) • EN 61000-4-5:2014+AMD1:2017 (Surge) 2KV (line to earth), 1.5KV (line to line) • EN 61000-4-6: 2013 (CS) • EN 61000-4-8: 2009 (PFMF) • EN 61000-4-9: 2016 (PMF) • EN 61000-4-11: 2004 + A1:2017 • EN 61000-4-16 • EN 61000-6-4: 2007 + A1: 2011 • ISO 7637-2:2004
Safety	• UL/IEC 61010-1 • UL/IEC 61010-2 • UL/EN/IEC 62368-1 (previously 60950-1) • CAN/CSA C22.2 No. 62368-1

Cellular / WWAN Radio Standards	• EN 300 328 (V2.1.1:2019), ETSI EN 300 328 V2.1.1 (2016-11) (Electromagnetic compatibility) • EN 301 893 (V1.8.1:2015), ETSI EN 301 893 V2.1.1 (2017-05) (Radiated spurious emissions) • EN 301 489-1 (V2.1.1:2017-02), ETSI EN 301 489-1 V2.1.1 (2017-02) • EN 301 489-17 (V3.2.0:2017-03), ETSI EN 301 489-17 V3.1.1 (2017-02) • EN 301 489-19 (V2.1.1:2019) • EN 301 908-1 v11.1.7:2018-12, ETSI EN 301 908-1 V7.1.1 (2015-03) (Radiated emissions RF control and monitoring) • EN 301 908-2 v11.1.2:2017-08, ETSI EN 301 908-2 V11.1.2 (2017-08) (RF conducted) • EN 301 908-13 v11.1.2:2017-07, ETSI EN 301 908-13 V11.1.2 (2017-07) (RF Conducted) • EN 62311:2019, IEC 62311 Ed. 1.0 b:2007 (Human exposure restrictions for radio frequency electromagnetic fields)
---------------------------------	--

Product List



IRG5520+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000044	08000041	08000042	08000046



IRG5520+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO
08000049



IRG5520+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000264	08000261	08000262	08000266



IRG5520+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and antennas included.

Power Cord & Part Number(s)

GPIO
08000269



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000074	08000071	08000072	08000076



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO
08000079



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000294	08000291	08000292	08000296



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO

08000299



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)

USA

08000374

UK

08000371

EU

08000372

AUS

08000376



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)

GPIO

08000379



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)

USA

08000434

UK

08000431

EU

08000432

AUS

08000436



IRG5521 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)

GPIO

08000439



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA

08000084

UK

08000081

EU

08000082

AUS

08000086



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO

08000089



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA

08000304

UK

08000301

EU

08000302

AUS

08000306



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO

08000309



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000384	08000381	08000382	08000386



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)

GPIO
08000389



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000444	08000441	08000442	08000446



IRG5521+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)

GPIO
08000449



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA

08000204



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO

08000209



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA

08000354



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO

08000359



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)**USA****08000414**



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)**GPIO****08000419**



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)**USA****08000474**



IRG5521+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 2 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)**GPIO****08000479**



IRG5540 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000054	08000051	08000052	08000056



IRG5540 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO
08000059



IRG5540 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000274	08000271	08000272	08000276



IRG5540 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO
08000279



IRG5540+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000064	08000061	08000062	08000066



IRG5540+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO

08000069



IRG5540+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000284	08000281	08000282	08000286



IRG5540+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GNSS, 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO

08000289



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000094	08000091	08000092	08000096



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO

08000099



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000314	08000311	08000312	08000316



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO
08000319



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000394	08000391	08000392	08000396



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)

GPIO
08000399



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000454	08000451	08000452	08000456



IRG5541 LTE Router with integrated: LTE-A (CAT6 300M / 50M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)

GPIO
08000459



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000104	08000101	08000102	08000106



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)

GPIO
08000109



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)

USA	UK	EU	AUS
08000324	08000321	08000322	08000326



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)

GPIO

08000329



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)

USA

08000404

UK

08000401

EU

08000402

AUS

08000406



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)

GPIO

08000409



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)

USA

08000464

UK

08000461

EU

08000462

AUS

08000466



IRG5541+ LTE Router with integrated: LTE-A PRO (CAT12 600M / 150M), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, RS485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)**GPIO****08000469**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply included.

Power Cord & Part Number(s)**USA****08000214**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug included.

Power Cord & Part Number(s)**GPIO****08000219**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and LTE antennas included.

Power Cord & Part Number(s)**USA****08000364**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE antennas included.

Power Cord & Part Number(s)**GPIO****08000369**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and WLAN antennas included.

Power Cord & Part Number(s)**USA****08000424**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and WLAN antennas included.

Power Cord & Part Number(s)**GPIO****08000429**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. Power supply and LTE/WLAN antennas included.

Power Cord & Part Number(s)**USA****08000484**



IRG5541+ FN FirstNet Ready LTE Router with integrated: LTE-A PRO (CAT12 600M with B14 NA support), GPS/GNSS, Wireless LAN (2.4/5 GHz), 4 x 10/100/1000 RJ45 Ethernet, USB-C Port, RS232, 3 x GPIO, IGN (ignition sense pin), Relay output, 485 half-duplex, IP54 enclosure. GPIO Cable w/4 pin plug and LTE/WLAN antennas included.

Power Cord & Part Number(s)

GPIO

08000489

Related Accessories

Accessories



Universal DIN Rail Router Mount. The router can be attached either on the side or flat on the

08000110



2 x LTE Antenna with SMA direct attach connector for IRG5000 router product line.

08000120



1 x GPS/GNSS (GPS, Galileo, Glonass, Beidou) Passive Antenna with 5m / 16ft cable

08000130



2 x Wi-Fi Antenna with RP-SMA direct attach connector for IRG5000 router product line.

08000140



1 x pigtail cable with 4 pin Molex connector, 3m / 10ft for IRG5500 & IRG5400 router

2500468



1 x pigtail cable with 8 pin Molex connector, 3m / 10ft for IRG5500 LTE Routers

2500476

Power Supplies



1 x PSU 12 VDC / 2 A with 4 pin Molex connector, 1.8m / 6ft cable and NA wall plug for IRG5500 & IRG5400 router product

08000150



1 x PSU 12 VDC / 2 A with 4 pin Molex connector, 1.8m / 6ft cable and Euro wall plug for IRG5500 & IRG5400 router product

08000160



1 x PSU 12 VDC / 2 A with 4 pin Molex connector, 1.8m / 6ft cable and UK wall plug for IRG5500 & IRG5400 router product

08000170



1 x PSU 12 VDC / 2 A with 4 pin Molex connector, 1.8m / 6ft cable and AUS wall plug for IRG5500 & IRG5400 router product

08000180