


Delock PCI Express x1 Card to 2 x internal M.2 Key B

Description

This PCI Express card by Delock expands the PC by two M.2 slots. Up to two M.2 SATA modules can be connected in format 2280, 2260, 2242, 2230 with this card. With the help of the large heat sink sufficient cooling of the M.2 modules is guaranteed.

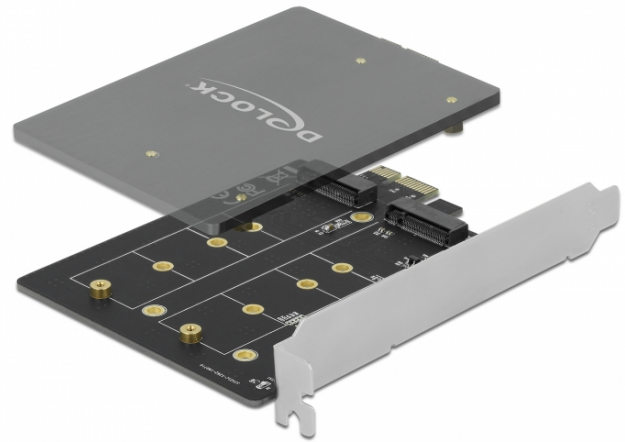

Specification

- Connectors:
internal:
2 x 67 pin M.2 key B slot
1 x PCI Express x1, V3.0
- Chipset: JMicron JMB582
- 3 x LED indicator
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable

System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Heat sink
- 2 x thermal pad
- M.2 mounting material
- User manual

Item no. 90432


EAN: 4043619904327

Country of origin: China

Package: Retail Box



Images



General	
Form factor:	Low Profile
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 or above
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Interface	
Connector 1:	1 x PCI Express x1, V3.0
Connector 2:	2 x 67 pin M.2 key B slot
Technical characteristics	
Chipset:	JMicron JMB582
Physical characteristics	
Slot bracket:	low profile standard