



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

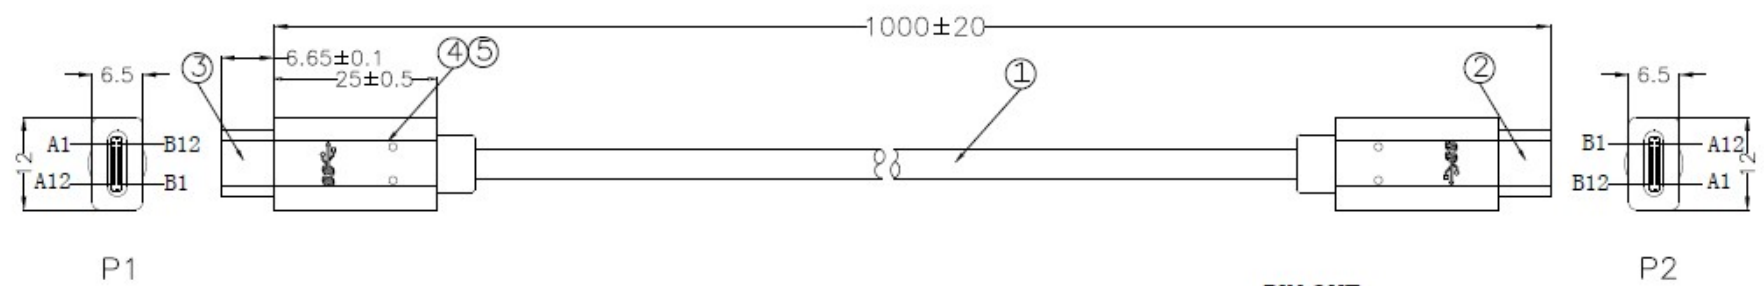

- ELECTRONIC TEST:**
- 1.OPEN/SHORT/INTERMITTENCE: 100%.
 - 2.CONDUCTIVE RESISTANCE:2 ohm (MAX)
 - 3.Vconn B5 EARTH IMPEDANCE:1K ohm
 - 4.RoHS & REACH Compliant

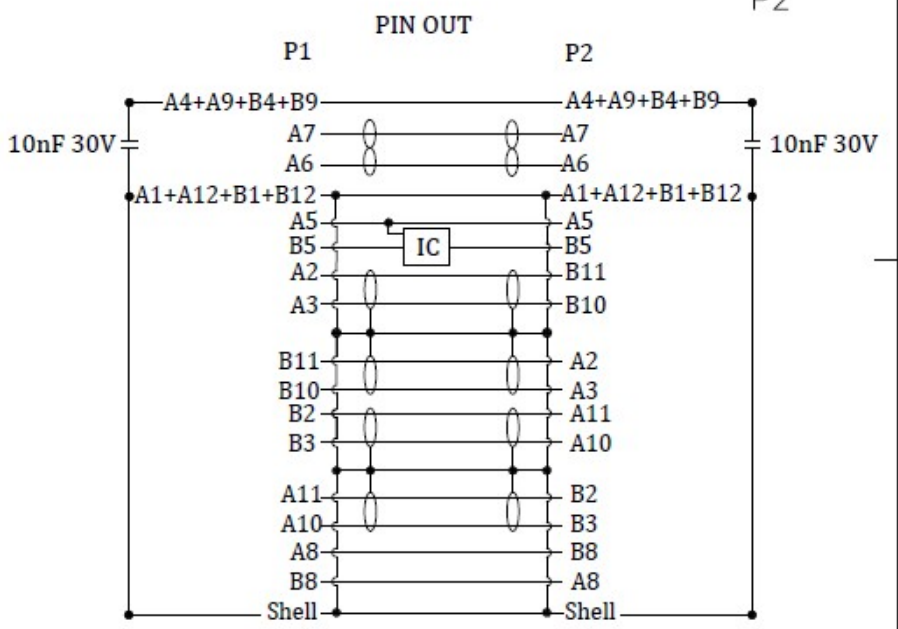

⑥	OVER MODEL	85A BLACK TPE	12	G
⑤	INNER MODEL	WHITE TPE	6	G
④	SHIELDING CASE	USB3.1 C Male Upper and lower shield	1	SET
③	CONNECTOR	USB3.1 C Male+PCBA, Pin Gold 30u", Shell Nickel Plated, without E-MARK	1	PCS
②	CONNECTOR	USB3.1 C Male+PCBA, Pin Gold 30u", Shell Nickel Plated, with E-MARK	1	PCS
①	CABLE	UL21572 USB3.1 CABLE [(30AWG*1P+EAM)*4+(30AWG*1P+EA)+23AWG*2C+32AWG*4C]+AB BLACK TPE OD:5.25±0.1MM	1000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

LTremref	Quantity	Title/Name, designation, material, dimension etc	Artfkle No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date 12-06-2019	File name Date 12-06-2019 Scale FREE
ANGLE:		USB3.1 CM-CH IM GEN2.5A10G(with IF Certificate)	
UNIT:MM		26-2959	Edition 1 Sheet 1/1