

PATCHBOX® Plus+ Long Range Cassettes Fiber Optic

The PATCHBOX® is the most modern cabling system for network cabinets. It makes conventional cable guides and patch cables simply look old. Thousands of satisfied customers worldwide rely on this patented innovation to make their IT more efficient, faster and more economical.



Technical Specification

OS2 Cable

OS2 RBS 9µ/125µ, G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50µ/125µ, LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex - LC Duplex / LC Duplex - SC Duplex

Cable length

2.5m cover 46 RU:

1.8m extractable + 0.7m overlength non-retractable

Cassette Profiles

Stainless steel, laser-welded

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-25°C – 70°C

Ambient Humidity Non-Condensing

10% -90%

Gross Weight


0.42kg

Packaging Dimensions

690mm x 50mm x 50mm WxDxH

HS-Code

8544 7000

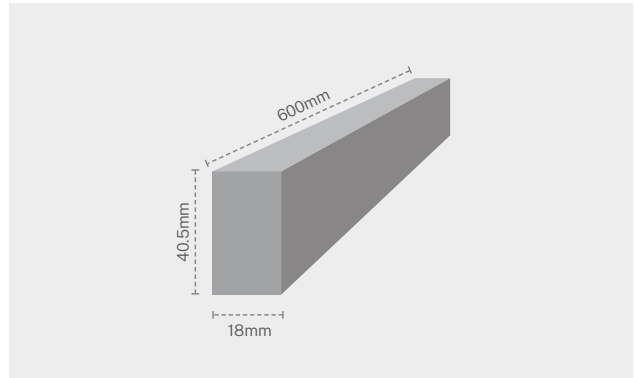

Items included

1 x PATCHBOX Plus+ Fiber Optic OS2 / OM4 Long Range

Cassette with LC-LC / LC-SC connector

OS2 Variants

Product Code

C60SMAOS21131Y

C60SMAOS21231Y

Connector Type

LC-LC

LC-SC

OM4 Variants

Product Code

C60MMAOM41131E

C60MMAOM41231E

Connector Type

LC-LC

LC-SC

