


RoHS compliant


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

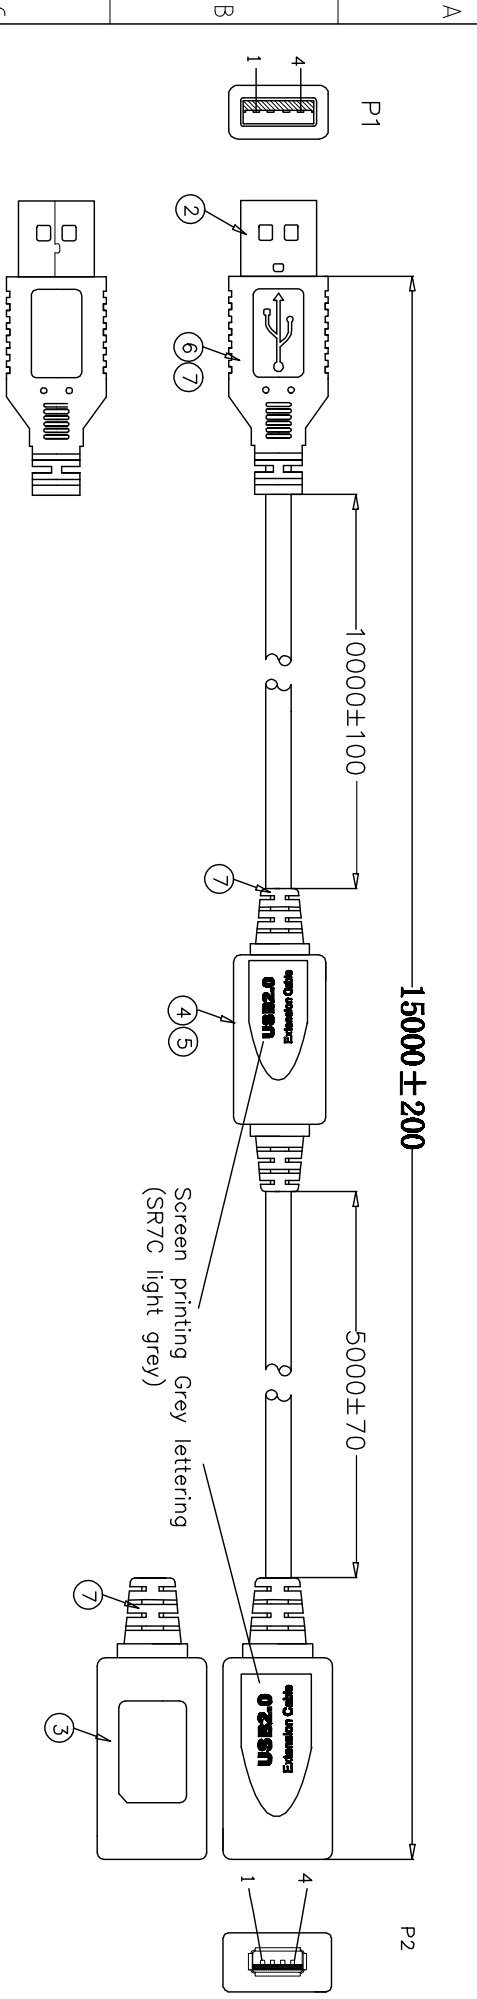

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S
- C.INSULATION RESISTANCE:DC300V 0.01S 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

⑦	MOLDED	45P BLACK PVC	16	G
⑥	MOLDED	LD-PE	3	G
⑤	PLASTIC SHELL	BLACK ABS SHELL	2	PCS
④	PCB	PCB-FE1.1S	2	PCS
③	CONNECTOR	USB A FEMALE 90°WHITE GLUE PIN G/F NICKEL PLATED	1	PCS
②	CONNECTOR	USB A MALE WHITE GLUE PIN G/F NICKEL PLATED	1	PCS
①	CABLE	UL2725 28#(7/0.127TC)*1PR+2#(7/0.2TC) *2C+AL+D(1/0.254BC)+B (64/0.12LMS) BLACK OD=4.8 MARKING: E***** AWG 2725 80°C 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	15000	MM
NO	NAME	SPECIFICATIONS	Q'TY	UNIT

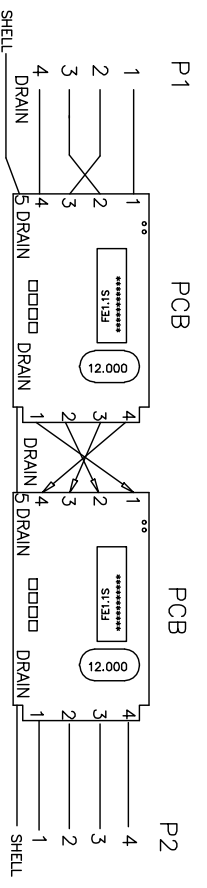

Itemref	Quantity	Title/Name/designation/material/dimension etc			Article No./Reference
Designed by	ACHY	Checked by	HELEN	Approved by - date	October.25.2016
ANGLE:		File name			
UNIT:MM		32	3590	Edition	1
				Scale	FREE
				Date	October.25.2016
				Sheet	1/1