



RevNo	Revision note	Date	Signature/Checked
-------	---------------	------	-------------------

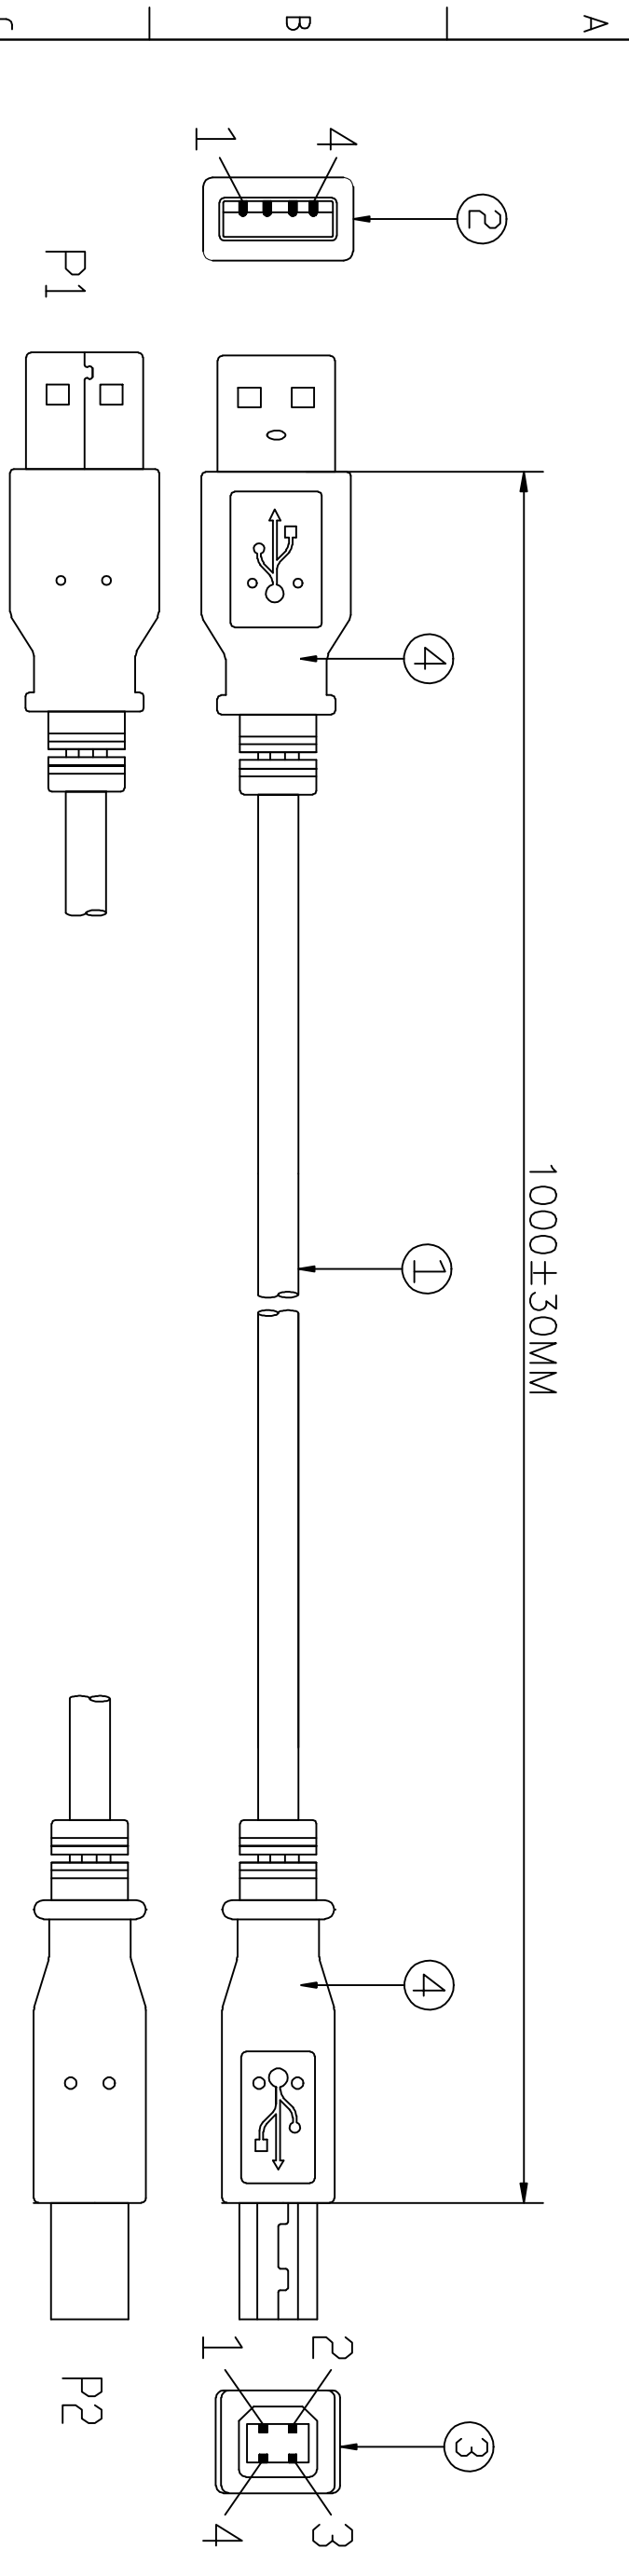

PIN OUT

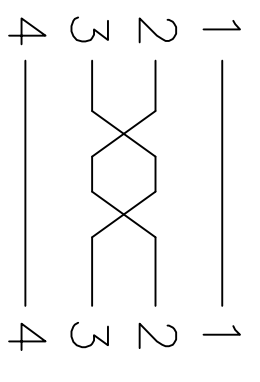

SHELL _____ SHELL

④	OUTER MOLDED	BLACK 45P PVC	0.021	KG
③	CONNECTOR	USB B TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80° 30V VW-1 USB2.0 High Speed Cable-ROHS	1	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

Ltmemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY		Checked by HELEN	Date MARCH 6,2012
		Approved by - date MARCH 6,2012	File name USB AM TO BM L=1M
USB2009BK		Date MARCH 6,2012	
USB2009BK		Scale FREE	

