



RevNo	Revision note	Date	Signature/Checked
-------	---------------	------	-------------------

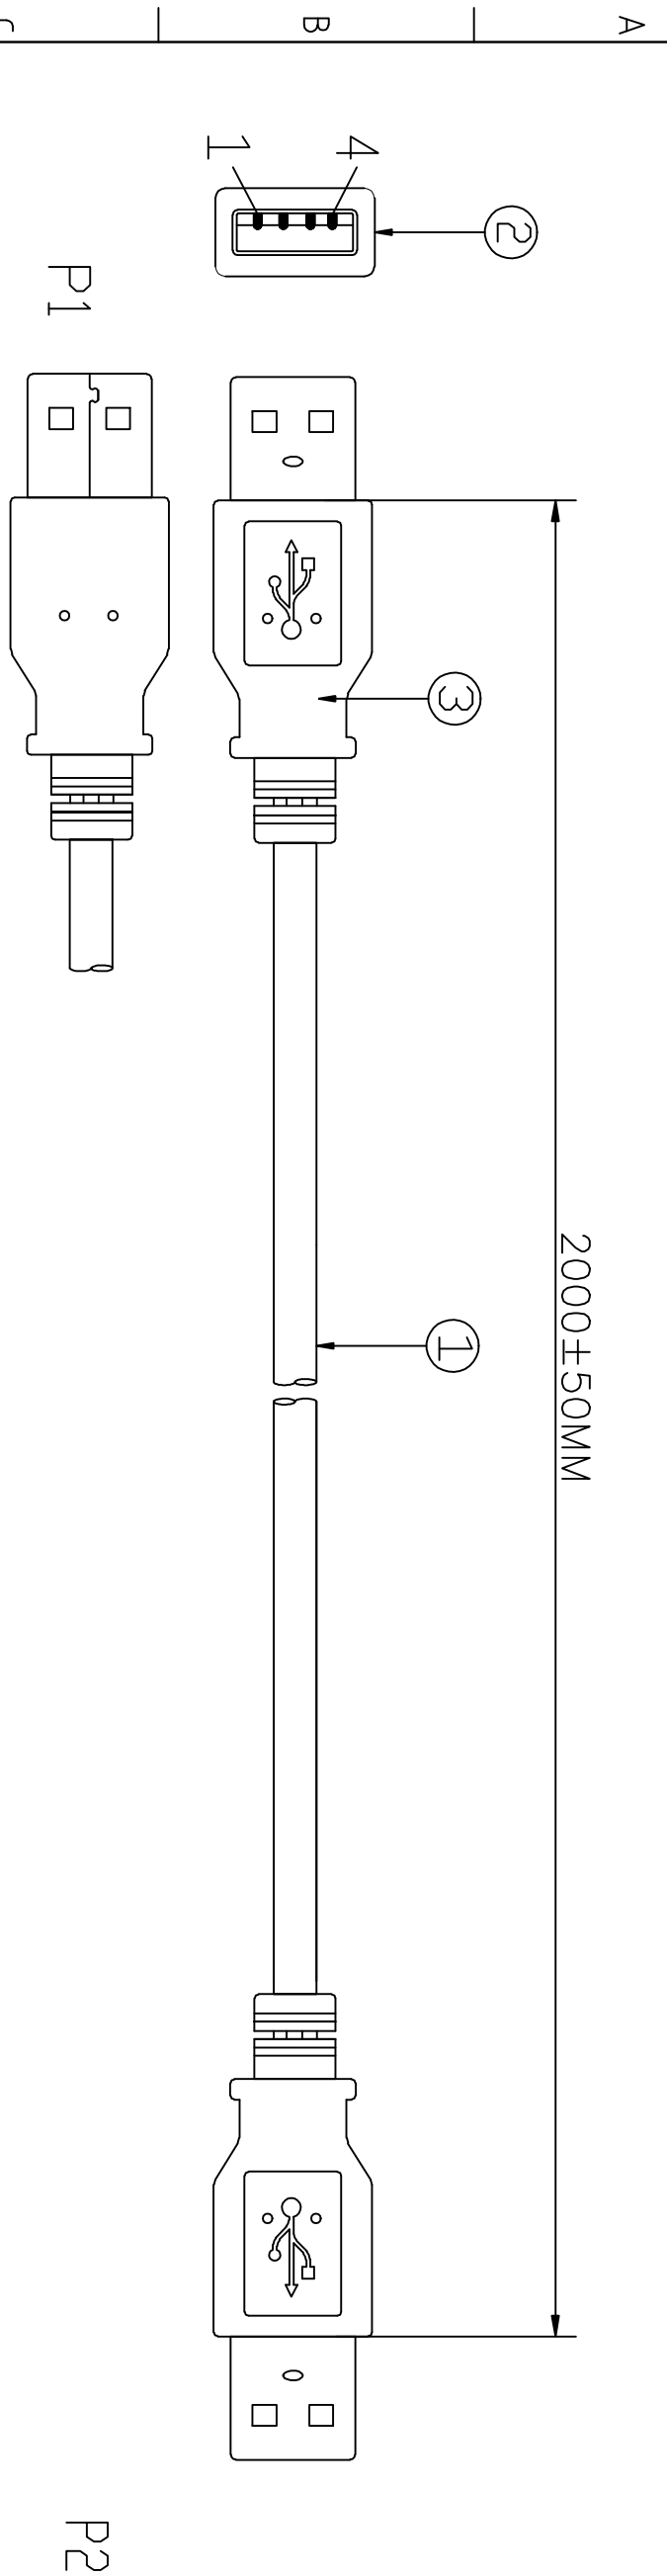

PIN OUT

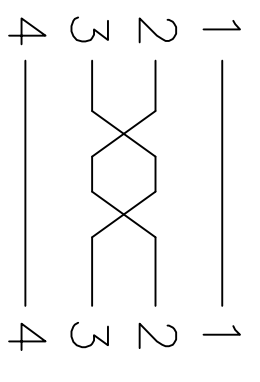

SHELL \_\_\_\_\_ SHELL

1:100% short,open and miss wire test.  
 2:Insulation resistance:DC300V 10MΩ(Min)  
 Conduction resistance 5Ω(Max)

REQUIREMENTS:

③	OUTER MOLDED	BLACK 45P PVC	0.042	KG
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80° 30V VW-1 USB2.0 High Speed Cable-ROHS	2	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY		Checked by HELEN	Date MARCH 6,2012
		Approved by - date MARCH 6,2012	File name USB AM TO AM L-2M

USB2050BK		Edition	Sheet
USB2050BK		1	1/1