



| | | | |
|-------|---------------|------|-------------------|
| RevNo | Revision note | Date | Signature/Checked |
|-------|---------------|------|-------------------|

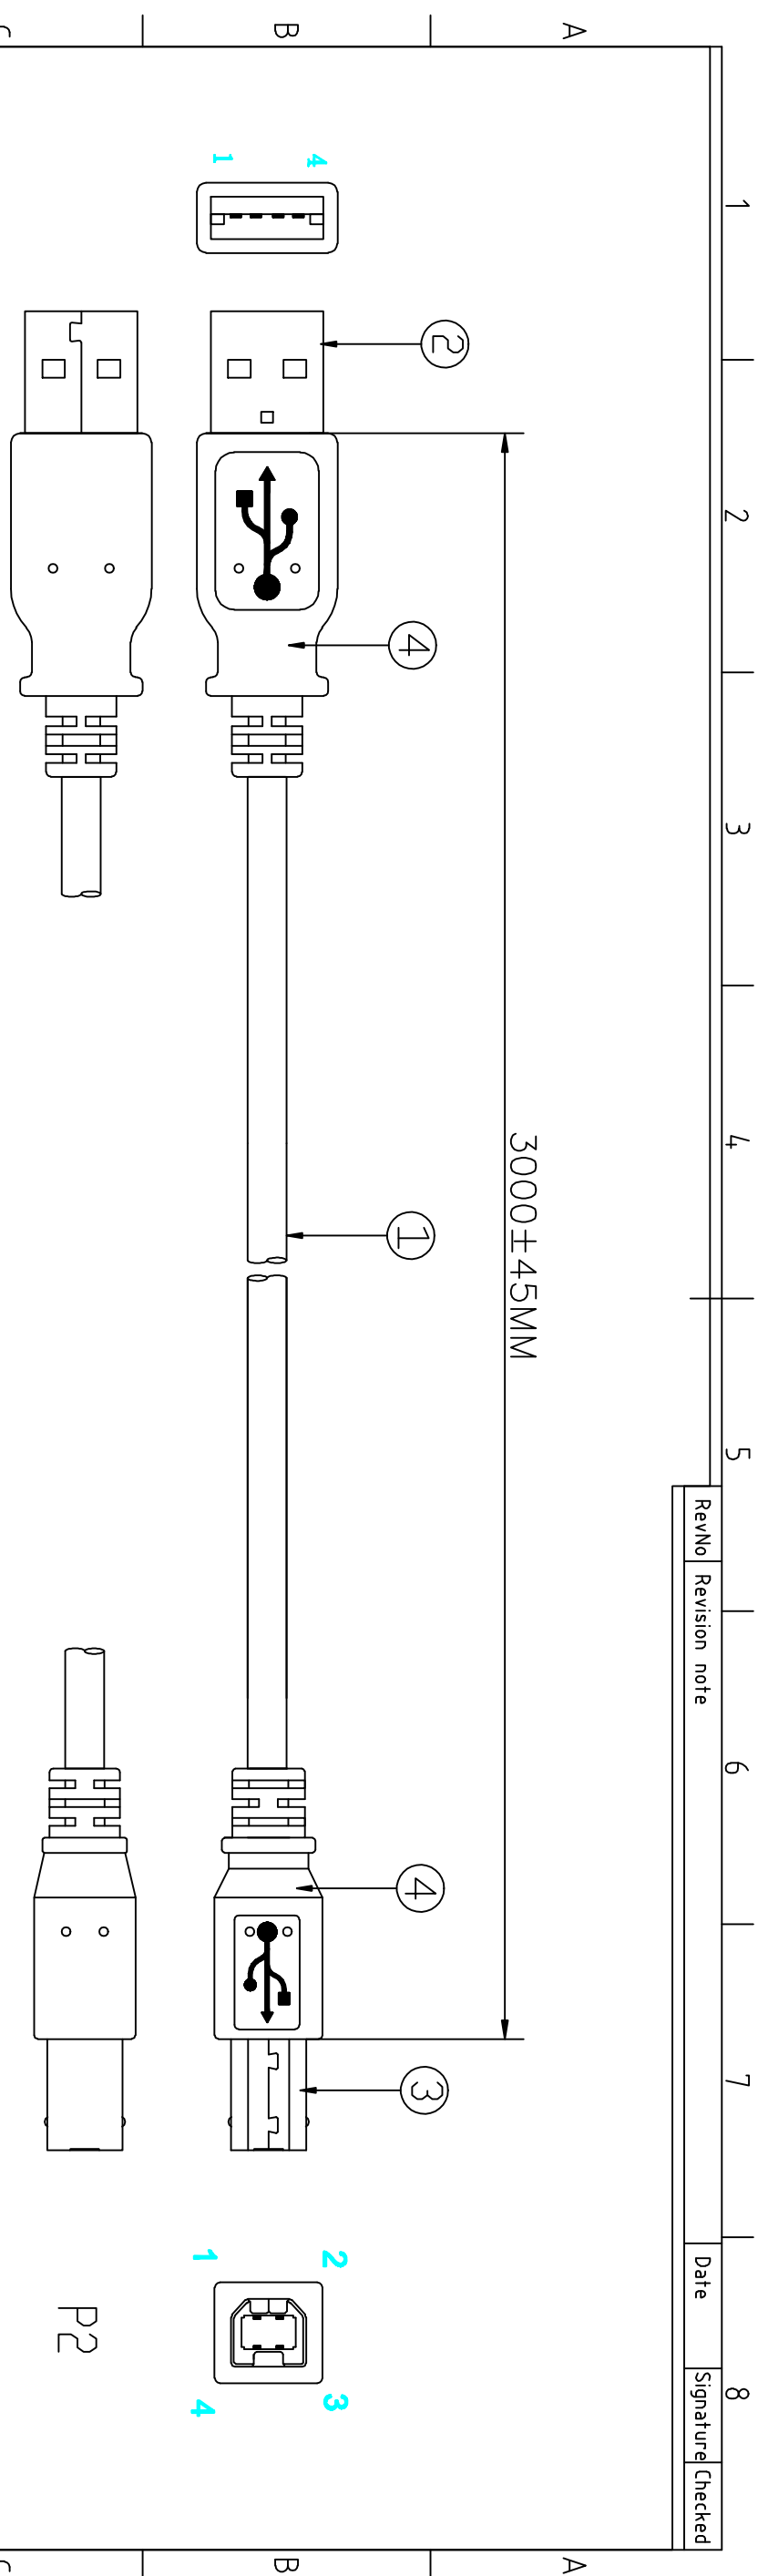

P1 PIN OUT P2

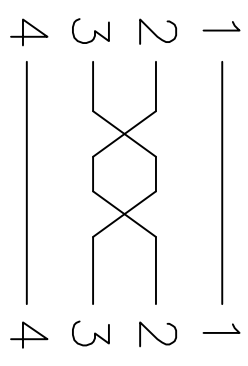

SHELL _____ SHELL

1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

REQUIREMENTS:

| | | | | |
|-----|-----------|--|-------|------|
| ③ | MOLDED | BLACK 45P PVC | 0.021 | KG |
| ② | CONNECTOR | USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 2 | PCS |
| ① | CABLE | USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80° 30V VW-1 USB2.0 High Speed Cable-ROHS | 3 | M |
| NO. | MATERIAL | DESCRIPTIONG | QTY. | UNIT |

| | | | | | |
|---------------------|----------|---|------------------------------------|--------------------------------|-----------------------|
| Itemref | Quantity | Title/Name,designation,material,dimension etc | | | Article No./Reference |
| Designed by ACHY | | Checked by HELEN | Approved by - date MARCH 6,2012 | File name USB AM TO AM L=3M | Date MARCH 6,2012 |

| | | | |
|-----------|--|---------|-------|
| USB2052BK | | Edition | Sheet |
| | | 1 | 1/1 |