

# Delock PCI Express x4 Card to 2 x USB Type-C™ + 3 x USB Type-A - SuperSpeed USB 10 Gbps

## Description

This PCI Express card by Delock expands the PC by **five external USB 3.2 ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### Sufficient ports - 2 x USB Type-C™ and 3 x USB Type-A

The PCIe card offers two USB-C™ port as well as three USB Type-A ports. Thus devices can be connected with **10 Gbps** at each port.



**Item no. 89064**

EAN: 4043619890644

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - external:
    - 2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
    - 3 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
  - internal:
    - 1 x PCI Express x4 (2-Lane), V3.0
    - 1 x SATA 15 pin power connector
- Chipset: Asmedia ASM3142, VIA VL822
- Data transfer rate up to:
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via SATA power connector
- Electrical power:
  - USB Type-C™: max. 15 watt (5 V / 3 A)
  - USB Type-A: max. 4.5 watt (5 V / 0.9 A)

- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -20 °C ~ 60 °C
- Humidity: 20 ~ 80 %

---

## System requirements

- Linux Kernel 3.18.37 or above
- Windows 10/10-64
- Windows Server 2016
- PC with one free PCI Express x4 / x8 / x16 / x32 slot


---

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
- User manual

---

## Images

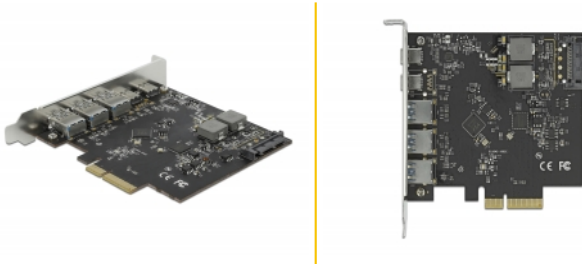

## General

|                             |                                                                                                                     |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------|
| Function:                   | bootable                                                                                                            |
| Supported operating system: | Linux Kernel 3.18.37 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |

## Interface

|           |                                                                                                |
|-----------|------------------------------------------------------------------------------------------------|
| External: | 2 x USB 10 Gbps USB Type-C™ female<br>3 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female |
| Internal: | 1 x PCI Express x4, V3.0<br>1 x SATA 15 pin power connector                                    |

## Technical characteristics

|                     |                              |
|---------------------|------------------------------|
| Chipset:            | Asmedia ASM3142<br>VIA VL822 |
| Data transfer rate: | 10 Gbps                      |