



DATA SHEET

HDMI® Inline Extender Decorative Wall Plate with Interchangeable Wall Plate Covers - 4K 60Hz

Complete an in-wall HDMI cabling installation with this wall plate featuring interchangeable color wall plate covers and a flexible HDMI pigtail

OVERVIEW

The HDMI Inline Extender Decorative Wall Plate is an excellent choice for transitioning to in-wall cabling, concealing and extending 4K HDMI behind the wall instead of running cables across the floor – perfect for home offices, conference rooms, huddle spaces, and classrooms.

Appearance matters, and the clean, professional-looking installation of this wall plate will complement any environment. The four included interchangeable wall plate covers come in white, black, beige, and brushed aluminum to match the decor of any installation.

This HDMI inline extender includes a thin, flexible HDMI pigtail that accommodates the tight bend radius required for installations within a standard junction box. With three different power options, you can choose from HDMI power supplied through the signal connection, the USB Micro B port on the front, or the power jack on the backside, offering versatility for any installation.s, Bluetooth devices, and mobile phones. Lastly, this tested and certified ultra high speed cable is backed by a lifetime warranty.

FEATURES

- Supports 4K 60Hz resolution for more vivid and detailed viewing
- Wall plate form factor for a clean, professional look
- Interchangeable wall plate covers in different colors for matching the decor of the installation site
- Flexible HDMI pigtail for easy installation in a wall box
- Three power options for versatility

ITEM DESCRIPTION

C2G42395 HDMI Inline Extender Decorative Wall Plate with Interchangeable Wall Plate Covers - 4K 60Hz

SIGNAL SPECIFICATIONS

- Resolutions Supported up to 4K (4096 x 2160) at 60 Hz
- Signal Bandwidth Supported: 18Gbps

ELECTRICAL SPECIFICATIONS


- Voltage: 30V
- Rating: Temp 80[D]C
- LED: LED Off or Blinking Light:
External Power Supply Required

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 40°C (Non-Condensing)
- Storage Temperature: -20°C to +80°C

PHYSICAL CHARACTERISTICS

- Cable: 32AWG; OD: 5.5 ± 0.2mm
- Micro USB: 2.0 Female, Terminal: Brass G/F, Shell: Nickel Plated, Insulation: LCP, Black
- HDMI Input: Female, Terminal: Copper Alloy G/F, Shell: Nickel Plated, Insulation: LCP+Glass, Black
- HDMI Output: Female, Terminal: Copper Alloy G/F, Shell: Nickel Plated, Insulation: LCP, Black
- Terminal Block: Housing: PA66, UL94V-0, Pin: Brass, Tin Plated
- Faceplates: Metal, White / Black / Beige / Brushed Aluminum
- Back Panel: ABS, Black
- Back Shell: Metal, Black
- Product is CE and FCC marked and conforms to 2015/863/EU ROHS

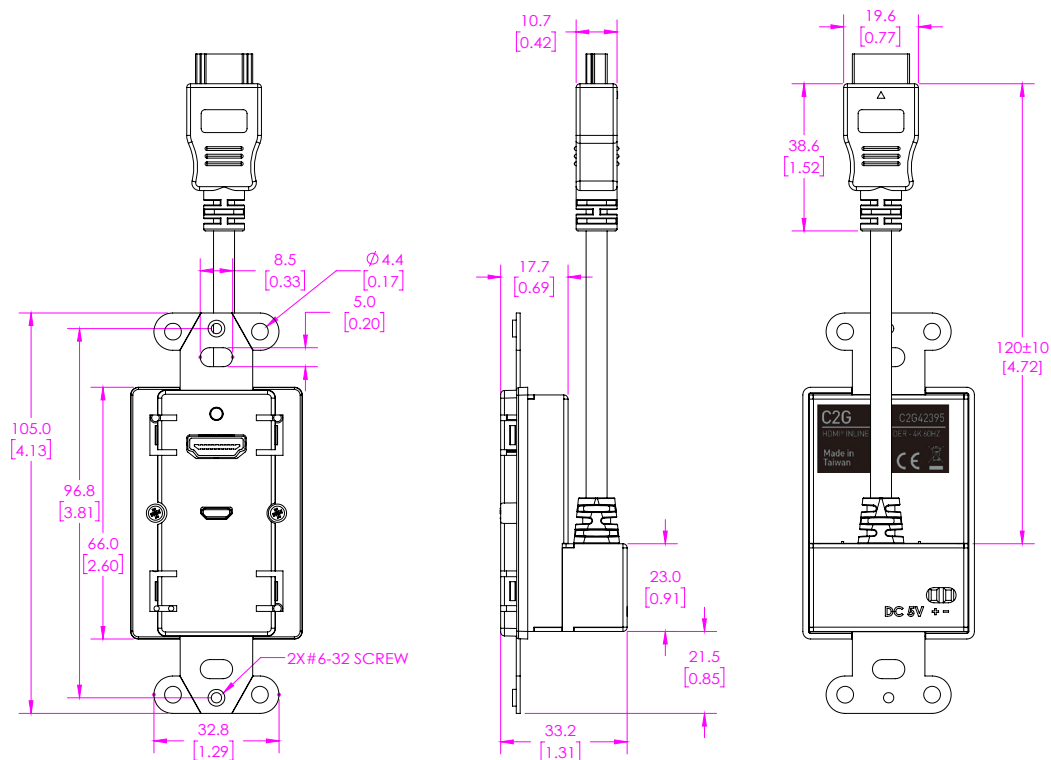

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2021 Legrand AV Inc. 210639 Rev 0 9/20 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.