



DATA SHEET

4-Port USB-A Hub with 5V 2A Power Supply

Add four USB 2.0 ports to your computer and transfer data up to 480Mbps

OVERVIEW

The 4-Port USB-A Hub with 5V 2A Power Supply expands the USB capabilities of a computer by providing four powered USB-A ports, so you can connect more peripherals and transfer data up to 480Mbps – ideal for supporting keyboards, mice, flash storage drives, and other low-powered USB devices. With a slim form factor, the hub can easily fit on your desktop to reduce clutter and keep those connected cables organized. This hub is a perfect accessory for the Microsoft® Surface® Book 2, Chromebooks, and other leading laptops and tablets.

The 5V 2A power supply provides power to your connected devices, so your computer doesn't have to. With a transfer rate of up to 480Mbps, it is fully backward compatible with older USB 1.1 devices. No need to worry about software or drivers to install, the plug-and-play feature makes it simple to just connect and start using right away.

FEATURES

- Four USB 2.0 ports to add peripherals and transfer data up to 480Mbps
- Slim form factor reduces desktop clutter, keeping cables organized
- 5V 3A power supply to provide power for your connected devices so your computer doesn't have to
- Backward compatible with previous USB specifications and devices
- Plug-and-Play, just connect and use right away
- Perfect for laptops, Chromebooks, and the Microsoft® Surface® Book 2

ITEM	DESCRIPTION
------	-------------

C2G54463	4-Port USB-A Hub with 5V 2A Power Supply
----------	--

SIGNAL SPECIFICATIONS


- Supports connecting four USB devices simultaneously
- Supports USB 2.0 (480Mbps) transmission, supports USB 2.0 full speed 12Mbps
- Compliant with Universal Charging Solution and USB Battery Charging Specification 1.1/1.2
- Supports OS: Windows 98SE, Windows Vista, Windows XP, Windows ME, Win2000, Windows 7, Windows 8, Mac OS X V10.8

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +45°C
- Operating Humidity: 10% to 90% RH (No Condensation)
- Storage Temperature: 10°C to +90°C
- Storage Humidity: 10% to 90% RH (No Condensation)

PHYSICAL CHARACTERISTICS

- USB AM Female: Insulation: White, Shell Nickel Plated
- Mini USB Female: Insulation: Black, Shell Nickel Plated
- Molding Material: Black ABS Conforms ROHS
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

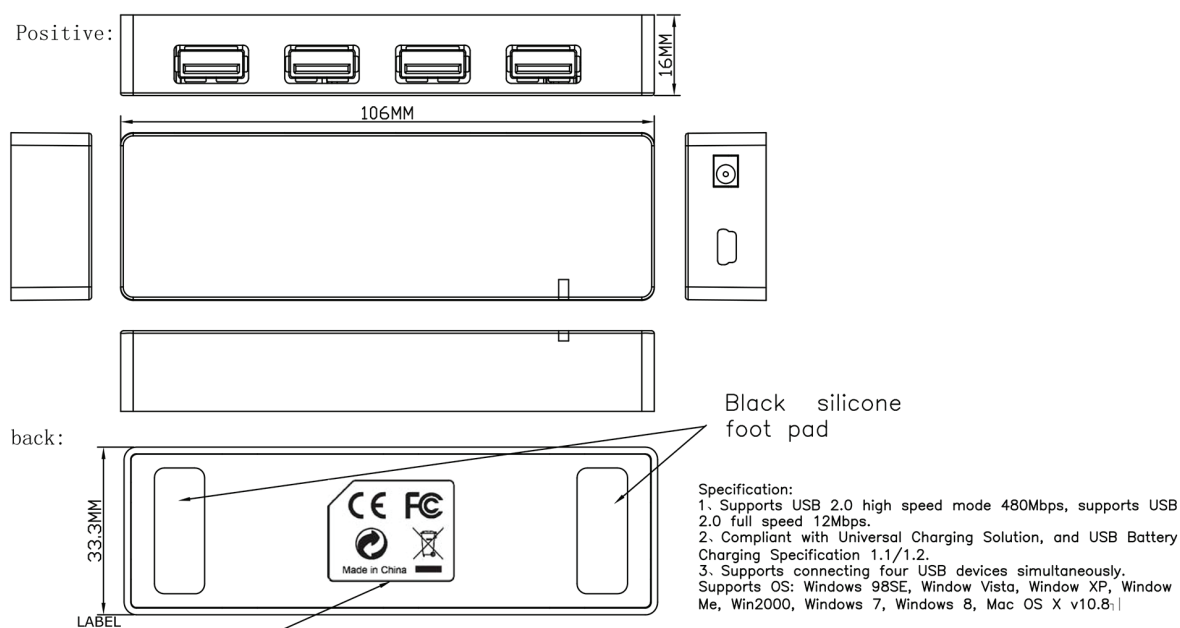

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | c2g.com/uk | legrandav.com

EMEA P +31 495 580 840 E c2g.emea@av.legrand.com

©2021 Legrand AV Inc. 210289-C2G54463 Rev A 5/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.