




Bitpower®

Notos Xtal 120 Fan Digital RGB

安裝說明書 / Installation Guide / 安装说明书

◀ 安裝方式/Installation/安装方式

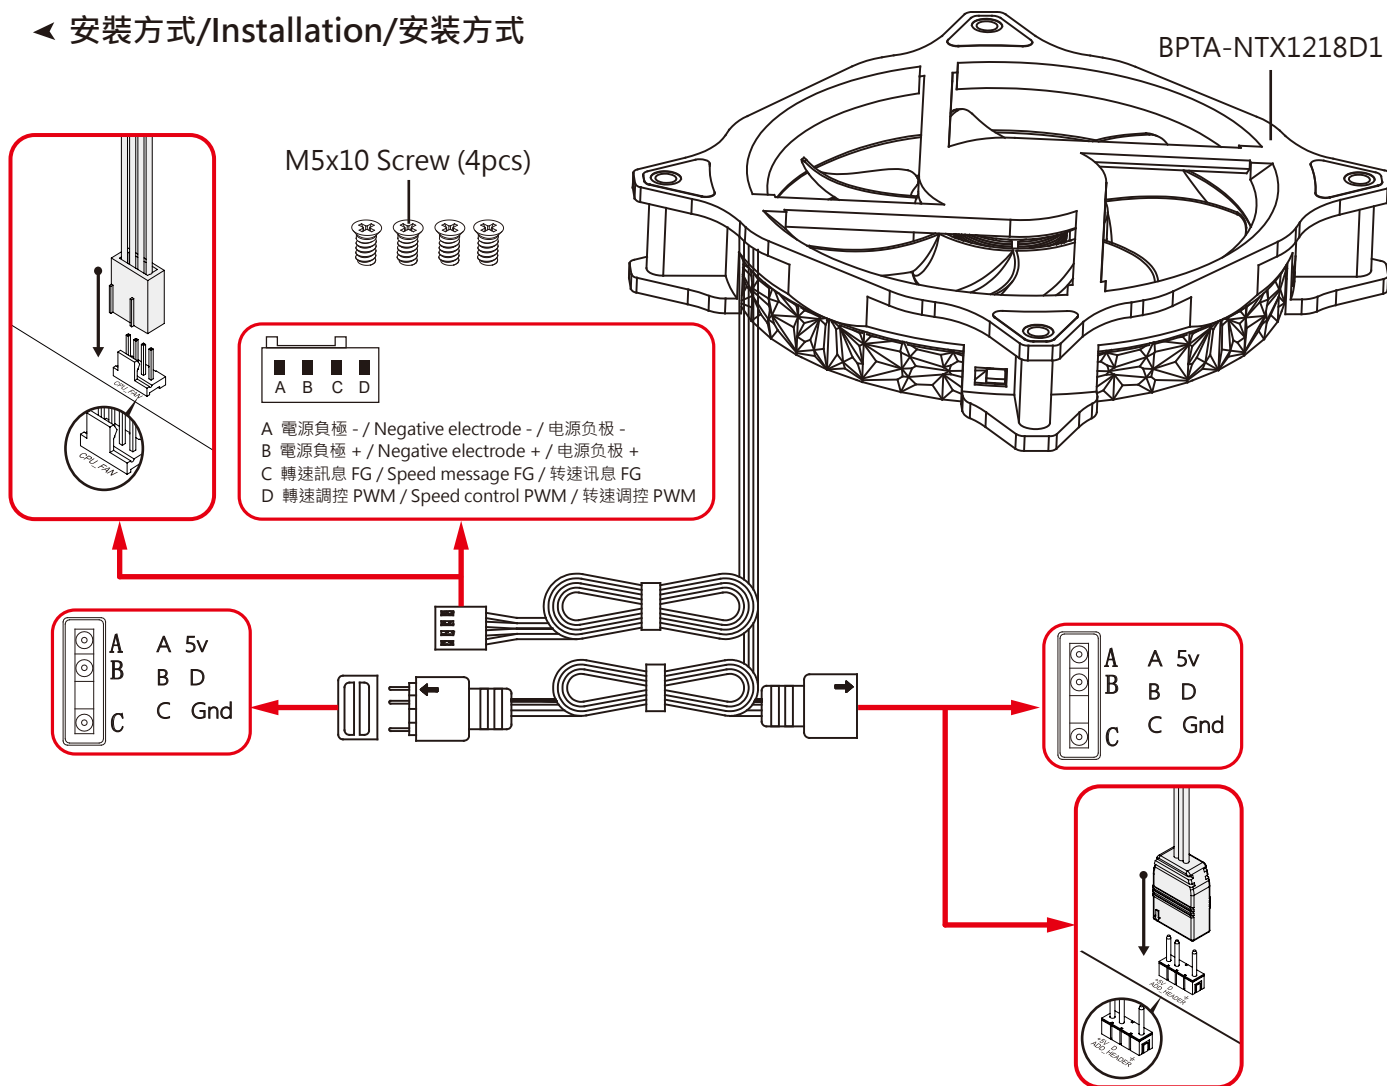

Specification	
Measurement	120x120x25mm
Rated Voltage	Fan:DC 12V / LED:DC 5V
Operation Voltage	7V~13.2V
Staring Voltage	≤7V(ON / OFF)
Rated Current	Fan:0.10A~0.12A(Max.) / LED:1.0A~1.1A(Max.)
Power Consumption	Fan:1.2W~1.5W(Max.) / LED:5.0W~5.5W(Max.)
Fan Speed	800~1800RPM±10%
Airflow	41~44CFM(Max.)
Air Pressure	1.7mm H ₂ O~2.0mm H ₂ O(Max.)
Noise Level	25Dba Max:28Dba
Life time	30000 Hours
Number of Blades	7
LED Light Bar	24 pcs
Power Connector	PWM 4pin header / DRGB 5V 3pin header

風扇規格	
尺寸	120x120x25mm
額定電壓	Fan:DC 12V / LED:DC 5V
工作電壓	7V~13.2V
啟動電壓	≤7V(ON / OFF)
額定電流	Fan:0.10A~0.12A(Max.) / LED:1.0A~1.1A(Max.)
功率消耗	Fan:1.2W~1.5W(Max.) / LED:5.0W~5.5W(Max.)
轉速	800~1800RPM±10%
風量	41~44CFM(Max.)
風壓	1.7mm H ₂ O~2.0mm H ₂ O(Max.)
噪音	25Dba Max:28Dba
壽命	30000 Hours
葉片數	7 leaves
LED燈珠數	24 pcs
連接器	PWM 4pin header / DRGB 5V 3pin header

風扇規格	
尺寸	120x120x25mm
額定电压	Fan:DC 12V / LED:DC 5V
工作电压	7V~13.2V
启动电压	≤7V(ON / OFF)
额定电流	Fan:0.10A~0.12A(Max.) / LED:1.0A~1.1A(Max.)
功率消耗	Fan:1.2W~1.5W(Max.) / LED:5.0W~5.5W(Max.)
转速	800~1800RPM±10%
风量	41~44CFM(Max.)
风压	1.7mm H ₂ O~2.0mm H ₂ O(Max.)
噪音	25Dba Max:28Dba
寿命	30000 Hours
叶片数	7 leaves
LED灯珠数	24 pcs
连接器	PWM 4pin header / DRGB 5V 3pin header

注意：跑水前，請先確認所有零件已安裝在正確的位置上。在不開主機，單開水泵的情況下，進行24小時的跑水測試，確保無漏水情況後再開主機，避免發生漏水而導致電腦零件的損壞。
Before filling in the water, please make sure all the components are installed correctly. To prevent any leakage which may damage the PC components, please perform a 24-hour leaking test with only the pump connected to the power supply.

注意：跑水前，请先确认所有零件已安装在正确的位置上。在不开主机，单开水泵的情况下，进行24小时的跑水测试，确保无漏水情况后开主机，避免发生漏水而导致电脑零件的损坏。

本公司保留對產品的設計更改以及解釋的權力，如有更動恕不另行通知，產品顏色與配件以實物為準。

Bitpower reserves the right to change the product design and interpretations. These are subject to change without notice. Product colors and accessories are based on the actual product.

本公司保留对产品的设计更改以及解释的权力，如有更动恕不另行通知，产品颜色与配件以实物为准。