


# Delock PCI Express x4 Card to 2 x internal USB 10 Gbps Type-E Key A 20 pin female

## Description

This PCI Express card by Delock expands the PC by **two internal USB 3.2 key A 20 pin female ports**. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

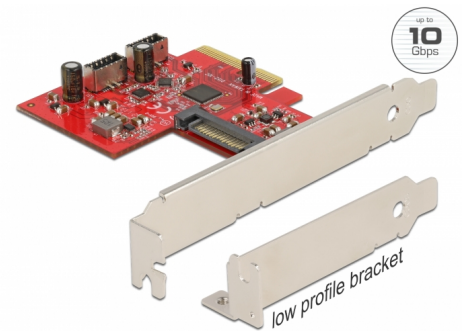

**Item no. 90058**

EAN: 4043619900589

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:  
internal:  
2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female  
1 x SATA 15 pin power plug  
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:  
SuperSpeed USB 10 Gbps,  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

## System requirements

- Linux Kernel 5.8 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

---

## Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

---

## Images



## General

|                             |                                                                                                                   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------|
| Supported operating system: | Linux Kernel 5.8.0 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------|

## Interface

|           |                                                                                               |
|-----------|-----------------------------------------------------------------------------------------------|
| Internal: | 1 x PCI Express x4, V3.0<br>1 x SATA 15 pin power plug<br>2 x USB 10 Gbps key A 20 pin female |
|-----------|-----------------------------------------------------------------------------------------------|

## Technical characteristics

|          |                 |
|----------|-----------------|
| Chipset: | Asmedia ASM3142 |
|----------|-----------------|

## Physical characteristics

|               |                         |
|---------------|-------------------------|
| Slot bracket: | Low Profile<br>standard |
|---------------|-------------------------|