


Delock Converter EDSFF E1.S to M.2 Key M slot NVMe

Description

This Delock converter enables the connection of a M.2 SSD in 2280 and 2260 format. The converter can be installed into your system internally through the **EDSFF E1.S** interface. Thus an M.2 SSD becomes an EDSFF E1.S SSD, which can be used in IoT, data center and server area.

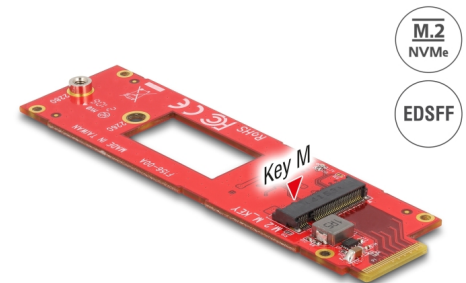

Item no. 63797

EAN: 4043619637973

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x EDSFF E1.S male >
 - 1 x 67 pin M.2 key M slot
- Interface: PCIe x4 Rev. 4.0
- Supports M.2 modules in format 2280 and 2260 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM
- Dimensions (LxWxH): ca. 111 x 31 x 6 mm


System requirements

- A free EDSFF E1.S interface

Package content

- Converter
- 1 x fixing screw for M.2 module
- User manual

Images



General

Function:	Bootable, ex UEFI 2.3.1
Slot:	PCIe
Supported module:	Supports M.2 modules in format 2280 and 2260 with key M or key B+M based on PCIe

Interface

Connector 1:	1 x 67 pin M.2 key M slot
Connector 2:	1 x EDSFF E1.S male

Physical characteristics

Length:	111 mm
Width:	31 mm
Height:	6 mm