



Make It Yours.

HYPER 212 EVO V2

RR-2V2E-18PK-R1

REDEFINING THE LEGEND



FEATURES

New SickleFlow 120 Fan - Redesigned curved blades and frame optimizes airflow and static pressure

Asymmetrical 4 Heat Pipe Design - Asymmetrical heat pipe design delivers maximum RAM compatibility and clearance space across various motherboard platforms

Direct Contact Technology - Exclusive Direct Contact Technology using 4 copper heat pipes deliver exceptional heat dissipation

Precise Combination of Air Flow and Heat sink - Stacked-fin array provides low airflow resistance allowing cooler air flow through the heatsink

Quiet Operation - Performance silent fan with minimized vibrations provides noiseless operation

Snap and Play - Intuitive bracket design allows for a hassle free installation process

Improving the Legendary

Cooler Master has revived the legendary Hyper 212 EVO with major improvements. Upgraded with an asymmetrical heat pipe design, it now provides 100% RAM clearance for guaranteed compatibility across motherboards. The cooler stature has been shortened as well, making case compatibility even better. Cooler Master's exclusive Direct Contact Technology, paired with the new SickleFlow 120 Fan delivers the ultimate balance of cooling performance and quiet operation. Additionally, the universal brackets have been improved further, making installation simple and hassle free.


SPECIFICATIONS

Product Name		Hyper 212 EVO V2	
Product Number		RR-2V2E-18PK-R1	
Exterior Color		Silver & Black	
CPU Socket	Intel	LGA 2066/2011-v3 / 2011 /1200/ 1366/ 1156/ 1155/ 1151/ 1150/ 775	
	AMD	AM4 / AM3+ / AM3 / AM2+ / AM2 / FM2+ / FM2 / FM1	
Dimensions		120 x 80 x 155 mm (4.7 x 3.1 x 6.1 inch)	
Heat Sink Material		4 Heatpipes/ Direct Contact/ Aluminum Fins	
Fan	Dimensions (L x W x H)	120 x 120 x 25 mm (4.7 x 4.7 x 1 inch)	
	Quantity (pcs)	1 PC	
	Speed (RPM)	650 ~ 1800 RPM (PWM) ± 10%	
	Airflow (CFM)	62 CFM (Max)	
	Noise Level (dBA)	8 ~ 27 dBA	
	Pressure (mmH2O)	2.52 mmH2O (Max)	
	MTTF	160,000 hours	
	Power Connector	4-Pin(PWM)	
	Rated Voltage (VDC)	12	
Rated Current (A)	0.15A		
Warranty		2 years	

PACKING INFORMATION


EAN code	4719512101476		
UPC code	884102073779		
Net weight	0.76 KG		
Gross weight	1.89 KG		
Package dimension (L x W X H)	157x 99 x 228mm		
Carton dimension (L x W x H)	530x335 x 260mm		
Units/CTN	10		
Cont.	W/ Pallet	Carton/ Pallet	W/O Pallet
20'	4200	420	
40'	8400	840	
40 HQ	9600	960	

FEATURES & SYSTEM REQUIREMENTS

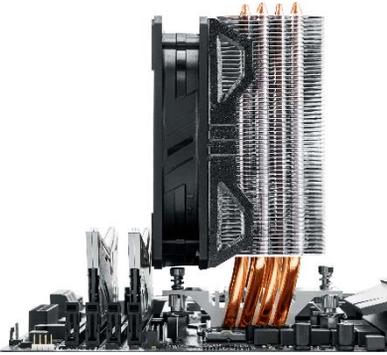

Asymmetrical Design

Asymmetrical heat pipe design delivers maximum RAM compatibility and clearance space



Direct Contact Technology

Direct Contact Technology using 4 copper heat pipe maximize surface area for optimal heat dissipation



SickleFlow 120 Fan

Newly redesigned curved blades with enhanced framework provides optimum airflow, static air-pressure, and noiseless operation



New user-friendly Bracket Design

Improved universal bracket design simplifies installation process.