


# Delock PCI Express x1 Card to 1 x RJ45 2.5 Gigabit LAN i225

## Description

The PCI Express card by Delock offers **one network port** with a data transfer rate up to **2500 Mbps**.

### NBASE-T for higher speed

Modern services and new technologies require higher bandwidths. **NBASE-T technology** enables speeds of 1 Gbps and 2.5 Gbps with conventional networking cables. The best possible transmission rate is set automatically.

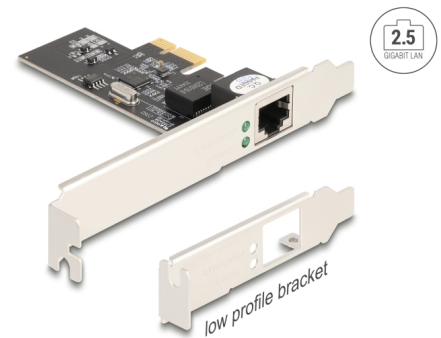

**Item no. 89598**

EAN: 4043619895984

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:  
external: 1 x 2.5 Gigabit LAN RJ45 jack  
internal: 1 x PCI Express x1, V2.1
- Chipset: Intel i225V
- Data transfer rate:  
Ethernet up to 10 Mbps  
Fast Ethernet up to 100 Mbps  
Gigabit Ethernet up to 1000 Mbps  
NBASE-T with up to 2.5 Gbps  
PCI Express x1 up to 4 Gbps
- Supports IEEE 802.3 / 802.3u / 802.3ab
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Supports Wake On LAN (WOL)
- Supports 9k Jumbo Frames
- Supports PXE
- LED indicator for link and activity

## System requirements

- Linux Kernel 5.8 or above
- Windows 10-64
- PC with one free PCI Express slot

---

## Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

---

## Images



## General

|                             |                   |
|-----------------------------|-------------------|
| Supported operating system: | Windows 10 64-Bit |
| LED indicator:              | Link and activity |

## Interface

|           |                           |
|-----------|---------------------------|
| External: | 1 x Gigabit LAN RJ45 jack |
| Internal: | 1 x PCI Express x1, V2.0  |

## Technical characteristics

|                     |  |
|---------------------|--|
| Chipset:            | Intel® i225V v3  |
| Data transfer rate: | Ethernet up to 10 Mbps<br>Fast Ethernet up to 100 Mbps<br>Gigabit Ethernet up to 1 Gbps<br>Gigabit Ethernet up to 2.5 Gbps |

## Physical characteristics

|               |                      |
|---------------|----------------------|
| Slot bracket: | Low Profile standard |
|---------------|----------------------|