


# Delock PCI Express x8 Card to 4 x internal SFF-8643 NVMe - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by **four SFF-8643 interfaces. SSDs with e.g. U.2 interface** can be connected to these ports by using an optional cable.

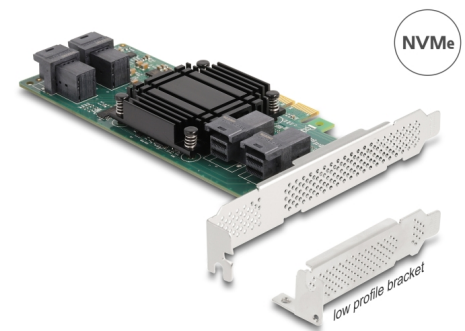

**Item no. 90585**

EAN: 4043619905850

Country of origin: China

Package: Box

## Technical details

- Connectors:  
4 x SFF-8643 female  
1 x PCI Express x8, V3.0
- Chipset: Broadcom PLX8725
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- 5 x LED indicator
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

## System requirements

- Linux Kernel 5.11 or above
- Windows Server 2019
- Windows 8.1/8.1-64/10/10-64/11

- PC with one free PCI Express x8 / x16 / x32 slot

---

## Package content

- PCI Express card
- Low profile bracket
- User manual

---

## Images



## General

|                             |                                                                                                                                         |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Function:                   | Bootable, ex UEFI 2.3.1<br>NVM Express (NVMe)                                                                                           |
| Supported operating system: | Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows Server 2019<br>Linux Kernel 5.11 or above |
| LED indicator:              | 5 x                                                                                                                                     |

## Interface

|           |                                                 |
|-----------|-------------------------------------------------|
| Internal: | 1 x PCI Express x8, V3.0<br>4 x SFF-8643 female |
|-----------|-------------------------------------------------|

## Technical characteristics

|                        |                  |
|------------------------|------------------|
| Chipset:               | Broadcom PLX8725 |
| Operating temperature: | 5 °C ~ 50 °C     |