


Delock PCI Express x4 Card to 1 x internal USB 3.2 Gen 2 key B 20 pin female

Description

This PCI Express card by Delock expands the PC by one internal **USB 3.2 key B 20 pin female** port. Various cables can be connected to the card to provide up to two USB Type-A interfaces.

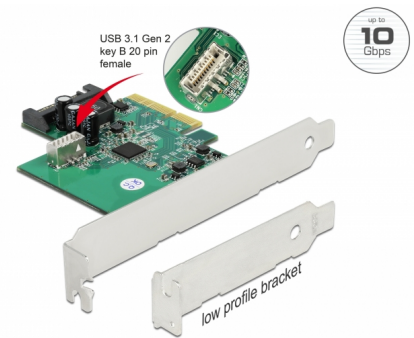

Item no. 90068

EAN: 4043619900688

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
internal:
1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key B 20 pin female
1 x SATA 15 pin power plug
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
SuperSpeed USB 10 Gbps,
SuperSpeed USB 5 Gbps,
Hi-Speed 480 Mbps,
Full-Speed 12 Mbps,
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

System requirements

- Linux Kernel 4.4 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- User manual

Images



General

Specification:	SuperSpeed USB 10 Gbps (USB 3.2 Gen 2)
Supported operating system:	Linux Kernel 4.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power plug 1 x USB 10 Gbps key B 20 pin female
-----------	---

Technical characteristics

Chipset:	Asmedia ASM3142
Data transfer rate:	10 Gbps

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------