



## TP-Link JetStream TL-SG3428 netværksswitch Administreret L2/L3 Gigabit Ethernet (10/100/1000) 1U Sort

Mærke : TP-Link

Produktserie: JetStream

Produktkode: TL-SG3428

Produktnavn : TL-SG3428



TP-Link JetStream TL-SG3428. Switch-type: Administreret, Switch lag: L2/L3. Basis omskiftning RJ-45 Ethernet porttype: Gigabit Ethernet (10/100/1000), Basis omskiftning RJ-45 Ethernet porte, antal: 24, Port til konsol: RJ-45/Micro-USB. MAC adresselabel: 16000 entries, Switch kapacitet: 56 Gbit/sek.. Netværksstandarder: IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3z. Stativ-montering, Formfaktor: 1U




| Administrationsfunktioner                       |                                                     | Sikkerhed                                   |                                                                           |
|-------------------------------------------------|-----------------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------|
| Switch-type *                                   | Administreret                                       | Filtrering af MAC-adresser                  | ✓                                                                         |
| Switch lag                                      | L2/L3                                               | Statisk port, sikkerhed                     | ✓                                                                         |
| Servicekvalitet support (QoS)                   | ✓                                                   | SSH/SSL support                             | ✓                                                                         |
| Webbaseret administration                       | ✓                                                   | Loop beskyttelse                            | ✓                                                                         |
| Cloud-administreret                             | ✓                                                   | BPDU filtrering/beskyttelse                 | ✓                                                                         |
| ARP inspektion                                  | ✓                                                   | IP-MAC-portbinding                          | ✓                                                                         |
| Konfigurerer lokationsindstillinger (CLI)       | ✓                                                   | Godkendelse                                 | MAC-baseret godkendelse, Portbaseret godkendelse                          |
| System hændelseslog                             | ✓                                                   | Godkendelsestype                            | AAA, RADIUS, TACACS+                                                      |
| MIB support                                     | Yes                                                 |                                             |                                                                           |
| Porte & Grænseflader                            |                                                     | Multicast funktioner                        |                                                                           |
| Basis omskiftning RJ-45 Ethernet porte, antal * | 24                                                  | Multicast-understøttelse                    | ✓                                                                         |
| Basis omskiftning RJ-45 Ethernet porttype *     | Gigabit Ethernet (10/100/1000)                      | Multicast Listener Discovery (MLD) snooping | ✓                                                                         |
| Gigabit Ethernet (kobber) porte, antal          | 24                                                  | Protokoller                                 |                                                                           |
| Antal SFP modulslots                            | 4                                                   | Administrationsprotokoller                  | SNMPv1/v2c/v3, SNMP                                                       |
| Port til konsol                                 | RJ-45/Micro-USB                                     | GARP VLAN registreringsprotokol (GVRP)      | ✓                                                                         |
|                                                 |                                                     | IPv4 & IPv6 funktioner                      | IPv4/IPv6 access-control list (ACL), IPv6 Telnet, IPv6 ping, IPv6 tracert |
| Netværk                                         |                                                     | Design                                      |                                                                           |
| Netværksstandarder *                            | IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3z | Stativ-montering *                          | ✓                                                                         |
| 10G understøttelse *                            | ✗                                                   | Formfaktor                                  | 1U                                                                        |
| Port-spejlning                                  | ✓                                                   | Produktfarve                                | Sort                                                                      |
| IP-routing                                      | ✓                                                   | LED-indikatorer                             | ✓                                                                         |
| Politikbaseret routing                          | ✓                                                   | Antal blæsere                               | 0 blæser(e)                                                               |
| Flowkontrol support                             | ✓                                                   | Strømstyring                                |                                                                           |
| Link aggregering                                | ✓                                                   | Strømkilde *                                | Vekselstrøm                                                               |


| Netværk                      |                                                                                     | Strømstyring                               |             |
|------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------|-------------|
| Broadcast stormkontrol       | ✓                                                                                   | Strømforsyning inkluderet *                | ✗           |
| Begrænsning af hastighed     | ✓                                                                                   | Vekselstrømsindgangsspænding               | 100 - 240 V |
| Spanning tree protokol       | ✓                                                                                   | Vekselstrømsindgangsfrekvens               | 50 - 60 Hz  |
| Head-of-line (HOL) blokering | ✓                                                                                   | Strømforbrug (maks.)                       | 19,22 W     |
| Ethernet LAN-datahastigheder | 10,100,1000 Mbit/s                                                                  | Power over Ethernet (PoE)                  |             |
| IPv4-ruter                   | 48                                                                                  | Strøm over Ethernet (PoE) *                | ✗           |
| IPv6-ruter                   | 48                                                                                  | Driftsbetingelser                          |             |
| VLAN understøttelse          | ✓                                                                                   | Driftstemperatur (T-T)                     | 0 - 45 °C   |
| Vituelle LAN funktioner      | Private VLAN, Protocol-based VLAN, Tagged VLAN, Voice VLAN                          | Opbevaringstemperatur (T-T)                | -40 - 70 °C |
| Antal VLAN'er                | 4000                                                                                | Relativ luftfugtighed ved drift (H-H)      | 10 - 90%    |
| Dataoverførsel               |                                                                                     | Relativ luftfugtighed ved opbevaring (H-H) | 5 - 90%     |
| Switch kapacitet *           | 56 Gbit/sek.                                                                        | Varmeafgivelse                             | 65,58 BUT/t |
| Hastighed for videresendelse | 41,66 Mpps                                                                          | Vægt & størrelser                          |             |
| MAC adresselabel *           | 16000 entries                                                                       | Bredde                                     | 440 mm      |
| Opbevar-og-frem              | ✓                                                                                   | Dybde                                      | 180 mm      |
| Statisk rute                 | ✓                                                                                   | Højde                                      | 44 mm       |
| Statiske routere             | 48                                                                                  | Emballage indhold                          |             |
| Jumbo Frames support         | ✓                                                                                   | Kabler inkluderet                          | LAN (RJ-45) |
| Jumbo rammer                 | 9000                                                                                | Hurtig start guide                         | ✓           |
| Pakke bufferlager            | 12 MB                                                                               | Emballeringsdata                           |             |
| Sikkerhed                    |                                                                                     | Pakkebredde                                | 528 mm      |
| DHCP funktioner              | DHCP client, DHCP relay, DHCP server, DHCP snooping, DHCPv6 client, DHCPv6 snooping | Pakkedybde                                 | 250 mm      |
| Adgangskontrolliste (ACL)    | ✓                                                                                   | Pakkehøjde                                 | 80 mm       |
| IGMP snooping                | ✓                                                                                   | Pakkevægt                                  | 2,77 kg     |
|                              |                                                                                     | Logistik data                              |             |
|                              |                                                                                     | Harmoniseret systemkode (HS)               | 85176990    |



6935364010720

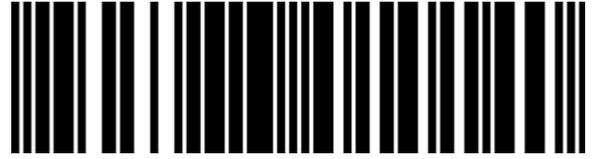

0845973010140



845973010140

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.