



TP-Link TL-MR105 trådløs router Hurtigt ethernet Enkelt band (2,4 GHz) 4G Hvid

Mærke : TP-Link

Produktkode: TL-MR105

Produkt navn : TL-MR105

TP-Link TL-MR105. WAN forbindelsestype: RJ-45. Wi-Fi-bånd: Enkelt band (2,4 GHz), Bedste Wi-Fi standard: Wi-Fi 4 (802.11n), WLAN dataoverførselshastighed (maks): 300 Mbit/s. Ethernet LAN-grænsefladetype: Hurtigt ethernet, Ethernet LAN-datahastigheder: 10,100 Mbit/s. Generering af mobilnetværk: 4G, 3G standard: DC-HSPA+, HSDPA, HSPA, UMTS, 4G standard: LTE-TDD & LTE-FDD. Sikkerhedsalgoritmer: 64-bit WEP, 128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, Firewall sikkerhed: IPv4 SPI Firewall




WAN-forbindelse		Sikkerhed	
Ethernet WAN *	✓	Firewall sikkerhed	IPv4 SPI Firewall
SIM-kort slot *	✓	Gæsteadgang	✓
WAN forbindelsestype	RJ-45	Understøttelse af DMZ	✓
Trådløse LAN funktioner		Protokoller	
Wi-Fi-bånd *	Enkelt band (2,4 GHz)	DHCP-klient	✓
Bedste Wi-Fi standard *	Wi-Fi 4 (802.11n)	DHCP-server	✓
WLAN dataoverførselshastighed (maks) *	300 Mbit/s	Universal Plug and Play (UPnP)	✓
Wi-Fi-standarder	802.11b, 802.11g, Wi-Fi 4 (802.11n)	Design	
WLAN dataoverførselshastighed (første bånd)	300 Mbit/s	Produktfarve	Hvid
Netværk		Produkttype *	Bordplade router
Ethernet LAN *	✓	Godkendelser	
Ethernet LAN-grænsefladetype *	Hurtigt ethernet	Compliance-certifikater	CE, RoHS
Ethernet LAN-datahastigheder	10,100 Mbit/s	Emballage indhold	
Portvideresendelse	✓	Kabler inkluderet	LAN (RJ-45)
Port udløsning	✓	Hurtig installationsvejledning	✓
Dynamisk DNS (DDNS)	✓	Bæredygtighed	
Antal gæstenetværk (2,4 GHz)	1	Overholdelse af bæredygtighed	✓
Mobilt netværk		Antenne	
Generering af mobilnetværk	4G	Antennedesign *	Intern
3G standard	DC-HSPA+, HSDPA, HSPA, UMTS	Strømstyring	
4G standard	LTE-TDD & LTE-FDD	Strømkilde type *	DC
Understøttelse af 4G-bånd	800,850,900,1800,2100,2300,2500,2600 MHz	Driftsbetingelser	
SIM-korttype	NanoSIM	Driftstemperatur (T-T)	0 - 40 °C
		Relativ luftfugtighed ved drift (H-H)	10 - 90%

Porte & Grænseflader		Driftsbetingelser	
Ethernet LAN-porte (RJ-45) *	2	Relativ luftfugtighed ved opbevaring (H-H)	5 - 90%
USB-port *	✗		
DC-in-stik	✓		
Administrationsfunktioner		Vægt & størrelser	
Knap til nulstilling	✓	Bredde	174 mm
WPS trykknop	✓	Dybde	130 mm
		Højde	60 mm
Sikkerhed		Emballeringsdata	
Sikkerhedsalgoritmer	64-bit WEP, 128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK	Pakketype	Kasse
Firewall	✓		



4895252503388

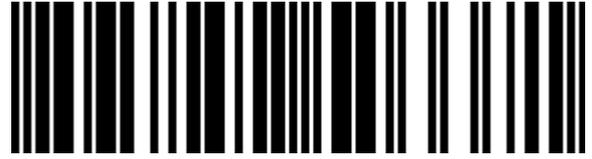

4895252503371

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.