



## TP-Link TL-SG1005D Ikke administreret Gigabit Ethernet (10/100/1000) Sort

Mærke : TP-Link

Produktkode: TL-SG1005D V4


Produktnavn : TL-SG1005D

TP-Link TL-SG1005D. Switch-type: Ikke administreret. Basis omskiftning RJ-45 Ethernet porttype: Gigabit Ethernet (10/100/1000), Basis omskiftning RJ-45 Ethernet porte, antal: 5. Fuld duplex. MAC adresselabel: 8000 entries, Switch kapacitet: 10 Gbit/sek.. Netværksstandarder: IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x. Strømsstik: DC-in-stik



Administrationsfunktioner		Præstation	
Switch-type *	Ikke administreret	Kompatible operativsystemer	Microsoft Windows 2000/XP/2003/Vista/2008/7/2012/8/10, MacOS, NetWare, UNIX, Linux
<b>Porte &amp; Grænseflader</b>		Maksimal kabellængde	100 m
Basis omskiftning RJ-45 Ethernet porte, antal *	5	Ventilatorfri	✓
Basis omskiftning RJ-45 Ethernet porttype *	Gigabit Ethernet (10/100/1000)	<b>Strømstyring</b>	
Gigabit Ethernet (kobber) porte, antal	5	Strømkilde *	DC
Strømsstik	DC-in-stik	Strømforsyning inkluderet *	✗
<b>Netværk</b>		Vekselstrømsindgangsspænding	100 - 240 V
Netværksstandarder *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x	Vekselstrømsindgangsfrekvens	50/60 Hz
10G understøttelse *	✗	Indgangsstrøm	0.6 A
Fuld duplex	✓	Indgangsspænding	9 V
Halv dupleks	✓	Strømforsbrug (maks.)	2,47 W
Flowkontrol support	✓	<b>Power over Ethernet (PoE)</b>	
Auto MDI/MDI-X	✓	Strøm over Ethernet (PoE) *	✗
Auto-forhandling	✓	<b>Driftsbetingelser</b>	
MAC-adresse auto-indlæring understøttet	✓	Driftstemperatur (T-T)	0 - 40 °C
MAC-adresse auto-forældelse understøttet	✓	Opbevaringstemperatur (T-T)	-40 - 70 °C
<b>Dataoverførsel</b>		Relativ luftfugtighed ved drift (H-H)	10 - 90%
Switch kapacitet *	10 Gbit/sek.	Relativ luftfugtighed ved opbevaring (H-H)	5 - 90%
MAC adresselabel *	8000 entries	Varmeafgivelse	8,22 BUT/t
Opbevar-og-frem	✓	<b>Vægt &amp; størrelser</b>	
Jumbo Frames support	✓	Bredde	165 mm
Jumbo rammer	15000	Dybde	108 mm
<b>Design</b>		Højde	28 mm
Stativ-montering *	✗	<b>Emballage indhold</b>	
Stabelbar *	✗	Hurtig start guide	✓
Produktfarve	Sort	<b>Emballeringsdata</b>	
		Pakkebredde	108 mm
		Pakkedybde	145 mm

Design		Emballeringsdata	
LED-indikatorer	✓	Pakkehøjde	85 mm
Antal blæsere	0 blæser(e)	Pakkevægt	180 g
Logistik data			
Harmoniseret systemkode (HS)		85176990	

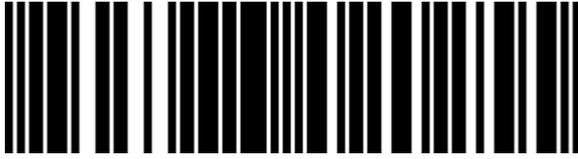


0845973020255



845973020255



9789800359785

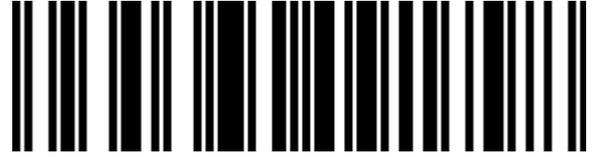

6935364091798



8592978038939

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.