



TP-Link TL-SL1226P Ikke administreret Gigabit Ethernet (10/100/1000) Strøm over Ethernet (PoE) 1U Grå

Mærke : TP-Link

Produktkode: TL-SL1226P V1




Produktnavn : TL-SL1226P

TP-Link TL-SL1226P. Switch-type: Ikke administreret. Basis omskiftning RJ-45 Ethernet porttype: Gigabit Ethernet (10/100/1000), Basis omskiftning RJ-45 Ethernet porte, antal: 26. MAC adresselabel: 8000 entries, Switch kapacitet: 8,8 Gbit/sek.. Netværksstandarder: IEEE 802.3af, IEEE 802.3at, IEEE 802.3x. Strøm over Ethernet (PoE). Stativ-montering, Formfaktor: 1U


Administrationsfunktioner		Strømstyring	
Switch-type *	Ikke administreret	Strømforsyning inkluderet *	✓
Trafik klassificering	✓	Vekselstrømsindgangsspænding	100 - 240 V
Porte & Grænseflader		Vekselstrømsindgangsfrekvens	50 - 60 Hz
Basis omskiftning RJ-45 Ethernet porte, antal *	26	Strømforbrug (maks.)	281 W
Basis omskiftning RJ-45 Ethernet porttype *	Gigabit Ethernet (10/100/1000)	Power over Ethernet (PoE)	
Fast Ethernet (kobber) porte, antal	24	Strøm over Ethernet (PoE) *	✓
Gigabit Ethernet (kobber) porte, antal	2	Power over Ethernet plus (PoE+) porte, antal	24
Kombo SFP porte, antal	2	Power over Ethernet (PoE) effekt pr. port	30 W
Netværk		Total Power over Ethernet (PoE)	250 W
Netværksstandarder *	IEEE 802.3af, IEEE 802.3at, IEEE 802.3x	Driftsbetingelser	
10G understøttelse *	✗	Driftstemperatur (T-T)	0 - 50 °C
Kobber ethernet kabelteknologi	10BASE-T, 100BASE-TX, 1000BASE-T	Opbevaringstemperatur (T-T)	-40 - 70 °C
Auto MDI/MDI-X	✓	Relativ luftfugtighed ved drift (H-H)	10 - 90%
Auto-forhandling	✓	Relativ luftfugtighed ved opbevaring (H-H)	5 - 90%
Dataoverførsel		Varmeafgivelse	1002,54 BUT/t
Switch kapacitet *	8,8 Gbit/sek.	Vægt & størrelser	
Hastighed for videresendelse	6,54 Mpps	Bredde	440 mm
MAC adresselabel *	8000 entries	Dybde	180 mm
Opbevar-og-frem	✓	Højde	44 mm
Jumbo Frames support	✓	Emballage indhold	
Jumbo rammer	10000	Hurtig start guide	✓
Pakke bufferlager	4,1 MB	Rack monteringskit	✓
Design		Emballeringsdata	
Stativ-montering *	✓	Pakkebredde	250 mm
Formfaktor	1U	Pakkedybde	528 mm
Produktfarve	Grå	Pakkehøjde	80 mm
LED-indikatorer	✓	Pakkevægt	3,02 kg
Antal blæsere	2 blæser(e)	Godkendelser	
Strømstyring		Certificering	CE, FCC, RoHS
Strømkilde *	Vekselstrøm	Logistik data	
		Harmoniseret systemkode (HS)	85176990



6935364089450

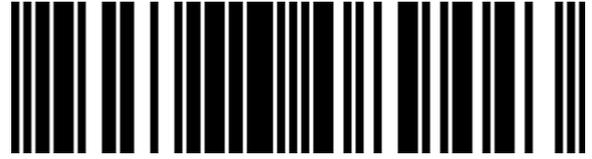

0845973089443



845973089443

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.