

ZYXEL

Zyxel GS1915-8EP Administreret L2 Gigabit Ethernet (10/100/1000) Strøm over Ethernet (PoE) Sort

Mærke : Zyxel

Produktkode: GS1915-8EP-EU0101F


Produktnavn : GS1915-8EP

Zyxel GS1915-8EP. Switch-type: Administreret, Switch lag: L2. Basis omskiftning RJ-45 Ethernet porttype: Gigabit Ethernet (10/100/1000), Basis omskiftning RJ-45 Ethernet porte, antal: 8. Fuld duplex. MAC adresselabel: 8000 entries, Switch kapacitet: 16 Gbit/sek.. Netværksstandarder: IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE.... Strømtik: AC-in jack. Strøm over Ethernet (PoE)



Administrationsfunktioner		Design	
Switch-type *	Administreret	LED-indikatorer	✓
Switch lag	L2	Elektromagnetisk kompatibilitet	LVD EN60950-1, BSMI CNS14336-1
Servicekvalitet support (QoS)	✓	Præstation	
Webbaseret administration	✓	Gennemsnitstid mellem fejl (MTBF)	1641000 t
System hændelseslog	✓	Strømstyring	
MIB support	RFC 1213 MIB II, RFC 2819, RFC 1215, RFC 1493	Strømkilde *	Vekselstrøm
Porte & Grænseflader		Vekselstrømsindgangsspænding	200 - 240 V
Basis omskiftning RJ-45 Ethernet porte, antal *	8	Vekselstrømsindgangsfrekvens	50 - 60 Hz
Basis omskiftning RJ-45 Ethernet porttype *	Gigabit Ethernet (10/100/1000)	Strømforbrug (maks.)	72 W
Gigabit Ethernet (kobber) porte, antal	8	Power over Ethernet (PoE)	
Strømtik	AC-in jack	Strøm over Ethernet (PoE) *	✓
Netværk		Power over Ethernet (PoE) porte, antal	8
Netværksstandarder *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x	Total Power over Ethernet (PoE)	60 W
10G understøttelse *	✗	Driftsbetingelser	
Kobber ethernet kabelteknologi	10BASE-T, 100BASE-TX, 1000BASE-T	Driftstemperatur (T-T)	0 - 40 °C
Fuld duplex	✓	Opbevaringstemperatur (T-T)	-40 - 70 °C
Flowkontrol support	✓	Relativ luftfugtighed ved drift (H-H)	10 - 95%
Broadcast stormkontrol	✓	Relativ luftfugtighed ved opbevaring (H-H)	10 - 95%
Begrænsning af hastighed	✓	Varmeafgivelse	245,52 BUT/t
Auto MDI/MDI-X	✓	Vægt & størrelser	
VLAN understøttelse	✓	Bredde	250 mm
Antal VLAN'er	8	Dybde	104 mm
Dataoverførsel		Højde	27 mm
Switch kapacitet *	16 Gbit/sek.	Vægt	620 g
Hastighed for videresendelse	11,9 Mpps	Emballage indhold	
MAC adresselabel *	8000 entries	Kabler inkluderet	Vekselstrøm
Jumbo Frames support	✓	Hurtig start guide	✓
		Brugervejledning	✓
		Brugervejledning	✓
		Emballeringsdata	
		Pakkebredde	302 mm

Dataoverførsel		Emballeringsdata	
Jumbo rammer	9000	Pakkedybde	227 mm
Pakke bufferlager	0,525 MB	Pakkehøjde	64 mm
Sikkerhed		Godkendelser	
IGMP snooping	✓	Certificering	CE, FCC, C-Tick, Class A, Class B, BSMI CNS13438
Filtrering af MAC-adresser	✓		
SSH/SSL support	✓		
Multicast funktioner		Logistik data	
Multicast-understøttelse	✓	Harmoniseret systemkode (HS)	85176990
Protokoller			
Administrationsprotokoller	SNMP v1,v2,v3, RMON (1,2,3,9)		
Design			
Produktfarve	Sort		

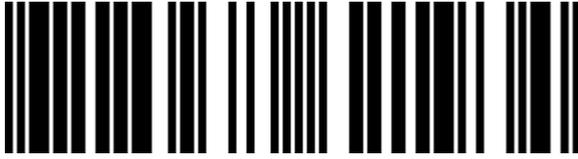

4718937621934

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.