

ASUS ProArt PA248CNV computer monitor 61.2 cm (24.1") 1920 x 1200 pixels Full HD+ Black

Brand : ASUS

Product family: ProArt

Product code: 90LM05K1-B03370


Product name : PA248CNV



- 24.1-inch 16:10 WUXGA (1920 x 1200) IPS display with frameless design
 - International color standard 100% sRGB and 100% Rec. 709 wide color gamut
 - Calman Verified with factory calibrated for excellent Delta E < 2 color accuracy
 - Extensive connectivity including DP over USB-C™ with 90W Power Delivery, DisplayPort daisy-chaining, HDMI, USB hub and RJ45 LAN port for the most flexibility
 - 75Hz refresh rate and Adaptive-Sync technology (48~75Hz) to animated content with fast action and eliminate screen tearing
 - VESA wall-mountable and ergonomic design with tilt, swivel, pivot and height adjustments for a comfortable viewing experience
- 24.1" IPS 1920 x 1200, 16:10, 16.7M, 5ms, HDR10, 75Hz, USB-C, DisplayPort, HDMI, 21W, 100 - 240 V, 50/60 Hz

| Display | | Ports & interfaces | |
|---------------------------------------|----------------------------------|---------------------------------|--------------|
| Display diagonal * | 61.2 cm (24.1") | DisplayPort version | 1.2 |
| Display resolution * | 1920 x 1200 pixels | Headphone out * | ✓ |
| HD type * | Full HD+ | Headphone outputs | 1 |
| Native aspect ratio * | 16:10 | Headphone connectivity | 3.5 mm |
| Panel type * | IPS | HDCP | ✓ |
| Backlight type | LED | HDCP version | 1.4 |
| Touchscreen * | ✗ | Charging port type | USB Type-C |
| Display brightness (typical) | 300 cd/m ² | Network | |
| Response time * | 5 ms | Ethernet LAN | ✓ |
| Screen shape * | Flat | Ergonomics | |
| Contrast ratio (typical) * | 1000:1 | VESA mounting * | ✓ |
| Contrast ratio (dynamic) | 10000000:1 | Panel mounting interface | 100 x 100 mm |
| Dynamic contrast ratio marketing name | ASUS Smart Contrast Ratio (ASCR) | Cable lock slot * | ✓ |
| Maximum refresh rate * | 75 Hz | Cable lock slot type | Kensington |
| Viewing angle, horizontal | 178° | Height adjustment * | ✓ |
| Viewing angle, vertical | 178° | Adjustable height (max) | 13 cm |
| Display number of colours * | 16.7 million colours | Pivot | ✓ |
| Pixel pitch | 0.27 x 0.27 mm | Pivot angle | 90 - -90° |
| Pixel density | 94 ppi | Swivelling | ✓ |
| Viewable size, horizontal | 51.8 cm | Swivel angle range | 90 - -90° |
| Viewable size, vertical | 32.4 cm | Tilt adjustment | ✓ |
| Digital horizontal frequency | 30 - 95 kHz | Tilt angle range | 35 - -5° |
| Digital vertical frequency | 24 - 75 Hz | Power | |
| High Dynamic Range (HDR) supported | ✓ | Energy efficiency class (SDR) * | E |
| High Dynamic Range (HDR) technology | High Dynamic Range 10 (HDR10) | Energy efficiency class (HDR) * | G |
| sRGB coverage (typical) | 100% | | |

| | | | |
|--|-----------------------|---|-------------|
| Performance | | Power | |
| Flicker-free technology | ✓ | Energy consumption (SDR) per 1000 hours * | 19 kWh |
| Low Blue Light technology | ✓ | Energy consumption (HDR) per 1000 hours * | 22 kWh |
| Multimedia | | Power consumption (typical) * | 21 W |
| Number of speakers | 2 | Power consumption (PowerSave) | 0.5 W |
| RMS rated power | 4 W | AC input voltage | 100 - 240 V |
| Built-in speaker(s) * | ✓ | AC input frequency | 50 - 60 Hz |
| Built-in camera * | ✗ | Energy efficiency scale | A to G |
| Design | | Weight & dimensions | |
| Market positioning * | Graphics design | Width (with stand) | 533 mm |
| Product colour * | Black | Depth (with stand) | 211 mm |
| Feet colour | Silver | Height (with stand) | 489 mm |
| Ports & interfaces | | Weight (with stand) | 6.5 kg |
| Built-in USB hub * | ✓ | Width (without stand) | 533 mm |
| USB hub version | 3.2 Gen 1 (3.1 Gen 1) | Depth (without stand) | 58 mm |
| USB upstream port type | USB Type-C | Height (without stand) | 359 mm |
| Number of upstream ports | 1 | Weight (without stand) | 4.4 kg |
| Number of USB Type-C upstream ports quantity | 1 | Packaging data | |
| USB Type-A downstream ports quantity | 4 | Package width | 735 mm |
| USB Power Delivery (USB PD) | ✓ | Package depth | 177 mm |
| USB Power Delivery up to | 90 W | Package height | 442 mm |
| HDMI * | ✓ | Package weight | 8.5 kg |
| HDMI ports quantity | 1 | Packaging content | |
| HDMI version | 1.4 | Cables included | AC |
| DisplayPorts quantity | 2 | Quick start guide | ✓ |
| | | Other features | |
| | | RJ-45 ports quantity | 1 |

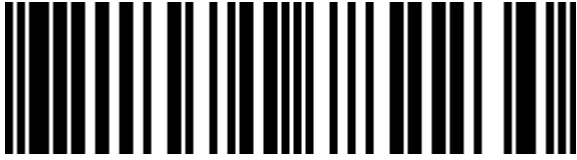

4711081782230



0195553804448



195553804448

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.