

ernitec

Ernitec 0070-24155 surveillance monitor 139.7 cm (55") 3840 x 2160 pixels




Brand : Ernitec

Product code: 0070-24155

Product name : 0070-24155


- 4K HD Solution
 - 7/24 working Status Security monitor
 - High brightness, High contrast, High definition
 - Adapt newest 3D digital filtering and 3D digital noise reduction technology
 - Picture fast response
 - 178 ° wide viewing angle
 - Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation
 - Humanize Menu
 - Convenient Controller
 - HDMI cable included
 - 5 Year Warranty
- 55" 24/7 4K UHD surveillance monitor. Industrial-grade LED screen. Metal chassis design

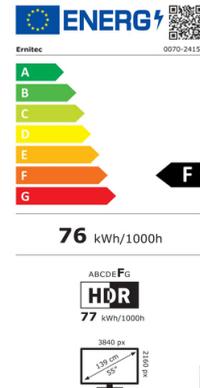

Ernitec 0070-24155 surveillance monitor 139.7 cm (55") 3840 x 2160 pixels:

- 4K HD Solution
 - Using all-imported industrial-grade LED screen
 - Designed for CCTV
 - High brightness, high contrast, high definition.
 - Adapts to the latest 3D digital filtering and 3D digital noise reduction technology
 - Picture fast response
 - 178 ° wide viewing angle; Ensure that the image display is not deformed
 - 24/7 working status, working continuously for 5 years
 - Metal chassis design, Anti-static, Anti-magnetic field, Anti interference, no radiation
- VESA size: 400 x 200

Design		Ports & interfaces	
Product colour *	Black	DisplayPorts quantity	1
Height adjustment	✗	Power	
Display		Power supply type	Internal
Display diagonal *	139.7 cm (55")	Power consumption (typical)	120 W
Display resolution *	3840 x 2160 pixels	Power consumption (standby)	0.1 W
Panel type	TFT	Power consumption (off)	0.1 W
Backlight type	LED	AC input voltage	100 - 240 V
Viewing angle, horizontal	178°	AC input frequency	50/60 Hz
Viewing angle, vertical	178°	Energy efficiency class (SDR)	F
Display number of colours	1.073 billion colours	Energy efficiency class (HDR)	F
Pixel pitch	0.315 x 0.315 mm	Energy consumption (SDR) per 1000 hours	76 kWh
Contrast ratio (typical)	4000:1	Energy consumption (HDR) per 1000 hours	77 kWh
Response time	5 ms	Operational conditions	
Performance		Operating temperature (T-T)	-30 - 85 °C
Analog signal format system	NTSC, PAL, SECAM	Weight & dimensions	
Built-in speaker(s)	✓	Weight	20 kg
VESA mounting	✓	Package weight	25 kg
On Screen Display (OSD)	✓	Packaging content	
On Screen Display (OSD) languages	German, English, French	Quick start guide	✓
Ports & interfaces			
HDMI ports quantity	1		

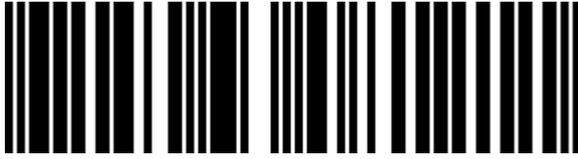

5715063081211

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.