ernitec

Ernitec 0070-08112 security camera Dome IP security camera
Indoor & outdoor 2592 x 1944 pixels Ceiling/wall

Brand : Ernitec

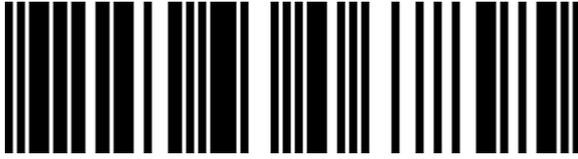**Product code:** 0070-08112

Product name : 0070-08112

- 1/2.8" progressive scan CMOS
- 2592×1944 @ 25/30fps (5MP)
- 2.8mm fixed lens
- Built-in warm lights, illumination distance up to 30m
- WDR, 3D DNR, ROI, HLC, BLC, Defog
- 1/1 audio in-/output, 1/1 alarm in-/output, Built-in microphone
- Support face, human, vehicle detection and capture
- Smart events: intrusion, single line crossing, double line crossing, loitering, wrong way, people counting
- IP66, Power Supply DC12V / POE (IEEE 802.3af)
- 5 Year Warranty
Wolf 5MP Turret Camera with 2.8mm Lens & White Light 30m, PoE, IP66 - NDAA

Ernitec 0070-08112 security camera Dome IP security camera Indoor & outdoor 2592 x 1944 pixels Ceiling/wall:

WOLF-BX-515WL

Performance

Type *	IP security camera
Placement supported *	Indoor & outdoor
Connectivity technology *	Wired
Maximum operating distance	30 m
Day/night mode	✔
Certification	CE/FCC

Design

Form factor *	Dome
Mounting type *	Ceiling/wall
Product colour *	White
Housing material	Metal, Plastic
International Protection (IP) code	IP66

Camera

Camera pan control	✔
Camera tilt control	✔
Angle of rotation	360°
Lens viewing angle, horizontal	93.4 - 75.7°
Lens viewing angle, vertical	69.1 - 54.6°
Tilt angle range	0 - 80°
Pan range	0 - 355°
White balance	Auto, Manual

Image sensor

Optical sensor size	25.4 / 2.8 mm (1 / 2.8")
Sensor type *	CMOS

Panoramic camera

Camera shutter type (panoramic camera)	Electronic, Mechanical
Camera shutter speed (panoramic camera)	1/5 ~ 1/20.000 s
Minimum illumination (panoramic camera)	0.003 lx
Signal-to-Noise Ratio (SNR) (panoramic camera)	55 dB

Video

Privacy masking	✔
Bit rate control	Constant Bit Rate (CBR), Variable Bit Rate (VBR)
Back Light Compensation (BLC)	✔
Highlight Compensation (HLC)	✔
Region of Interest (ROI) encoding	✔
Smart IR	✔

Audio

Built-in speaker(s)	✔
Audio input channels	1.0 channels
Audio output channels	1.0 channels
Audio formats supported	G.711
Built-in microphone	✔

Network

Ethernet LAN *	✔
Supported network protocols	IPv4/IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP, TLS/SSL
Number of users	10 user(s)
User access level	User
Streaming method	Unicast

Storage

Card reader integrated	✔
Compatible memory cards	SD
Maximum memory card size	256 GB

Ports & interfaces

Ethernet LAN (RJ-45) ports	1

Security

Alarm input channels	1
Alarm output channels	1
Video motion detection	✔

Panoramic camera

Focal length range (panoramic camera)	2.8 - 4 mm

Video

Maximum resolution *	2592 x 1944 pixels
Total megapixels *	5 MP
Video streaming	✔
Noise reduction	✔
Noise reduction technology	2D noise reduction, 3D noise reduction
Image quality adjustment	Brightness, Contrast, Saturation, Sharpness

Security

Human and vehicle targets classification	✔

Management features

Reset button	✔

Power

Power source type *	DC, PoE
Power consumption (max)	7.5 W

Operational conditions

Operating temperature (T-T)	-40 - 55 °C

Weight & dimensions

Weight	550 g

Packaging data

Package weight	1.25 kg

Packaging content

Number of cameras *	1

5715063067895

Catalog Object Cloud