ernitec

Ernitec Cygnus 32 channel NVR - 1.5U

Brand : Ernitec

Product name : Cygnus 32 channel NVR - 1.5U
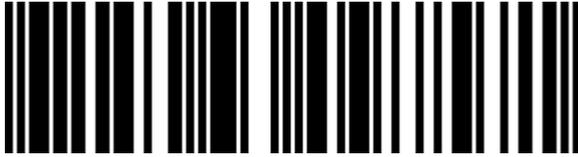
Product code: 0070-10404

- Up to 32ch IP cameras access
- Up to 8MP resolution for live view and recording
- Support face recognition and multi-objective recognition
- Intelligent analysis by NVR: Intrusion (support the accurate detection of vehicle and human)
- 4 SATA hard disk, up to 16TB for each HDD
- 2 RJ45 10/100/1000Mbps network interface
- Smart search & playback
- Support cloud upgrade
Cygnus 32 Channel NVR, 1.5U, 2 x NIC, 4 HDD Bays, 320Mbps, RAID - NDAA
Ernitec Cygnus 32 channel NVR - 1.5U. Video input channels: 32 channels, Maximum resolution: 3840 x 2160 pixels, Video recording modes: 1080p. HDD capacity: 16 TB, Maximum storage capacity: 64 TB, HDD interface: SATA. Ethernet LAN data rates: 10,100,1000 Mbit/s. Rack capacity: 1.5U, Brand compatibility: Ernitec, Product colour: Black. AC input voltage: 100 ~ 240 V

Performance	
Video input channels *	32 channels
Alarm input channels	16
Alarm output channels	4
Video recording modes	1080p
Maximum resolution *	3840 x 2160 pixels
Supported resolutions	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
Number of users	8 user(s)
Video motion detection	✔
Video loss detection	✔
Input bandwidth	320 Mbit/s

Hard drive	
HDD capacity *	16 TB
Number of HDDs supported	4
Maximum storage capacity *	64 TB
HDD interface *	SATA
HDD size	3.5"
RAID support	✔

Ports & interfaces	
Ethernet LAN (RJ-45) ports *	2
Power over Ethernet (PoE)	✘
Ethernet LAN data rates	10,100,1000 Mbit/s
HDMI output	✔
HDMI ports quantity	2
VGA (D-Sub) output ports	1
USB 2.0 ports quantity	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1
eSATA ports quantity	1

Ports & interfaces	
Internal SATA ports quantity	4
RS-485 ports	1
RS-232 interface	✔
eSATA	✔
Line-in	✔
Audio output	1
COM ports quantity	1
RS-232 ports	1

Features	
Rack mounting	✔
Rack capacity	1.5U
Brand compatibility	Ernitec
Reset button	✔
On/off switch	✔
Product colour	Black
Compatible products	ONVIF, SDK, CGI

Power	
AC input voltage	100 ~ 240 V

Operational conditions	
Operating temperature (T-T)	-10 - 50 °C
Operating relative humidity (H-H)	0 - 90%

Technical details	
Warranty period	5 year(s)

Weight & dimensions	
Width	440 mm
Depth	373 mm
Height	70 mm
Weight	4.65 kg
Package weight	6 kg

5715063097571

Catalog Object Cloud