ernitec

Ernitec 0070-24108-M computer monitor 20.3 cm (8") 800 x 600 pixels LCD Black

Brand : Ernitec
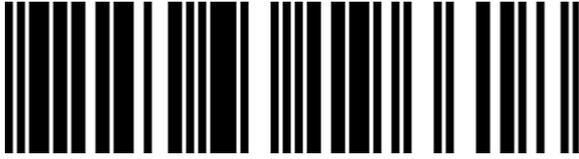
Product name : 0070-24108-M

Product code: 0070-24108-M

- industrial level DID LCD panel, suitable for extensive 7×24 continuous works
- Physical resolution of 800×600
- 5ms fast response time, no image ghosting
- Adapt newest 3D digital filtering and 3D digital noise reduction technology
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed
- High fidelity digital processing, brilliant and vivid video
- Built-in speaker
- Humanize Menu; Convenient Controller

8" 24/7 Surveillance monitor 800x600 Pixel. 1 x HDMI 2.0, 1 x VGA, 2 x BNC inputs. 1 x BNC output, 2 x Speakers, PSU.

Ernitec 0070-24108-M. Display diagonal: 20.3 cm (8"), Display resolution: 800 x 600 pixels, Display technology: LCD, 3D, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. VESA mounting. Product colour: Black

Display

Display diagonal *	20.3 cm (8")
Display resolution *	800 x 600 pixels
Native aspect ratio *	16:9
Display technology *	LCD
LED backlight	✔
Display brightness (typical)	250 cd/m²
Display brightness	250 cd/m²
Response time *	5 ms
Aspect ratio	16:9
Contrast ratio (typical) *	500:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	16.7 million colours
Pixel pitch	0.2025 x 0.2025 mm
3D	✔

Performance

Operating hours (hours/days)	24/7

Multimedia

Number of speakers	2
RMS rated power	6 W

Design

Market positioning *	Industrial
Product colour *	Black
Housing material	Metal
Front bezel colour	Black
Detachable stand	✔

Ports & interfaces

VGA (D-Sub) ports quantity	1
HDMI ports quantity	1
HDMI version	2.0
DC-in jack	✔
BNC input ports	2

Ergonomics

VESA mounting *	✔
Panel mounting interface	75 x 75 mm
On Screen Display (OSD) languages	English

Power

Power consumption (typical) *	8 W

Operational conditions

Operating temperature (T-T)	-30 - 85 °C

Packaging data

Package dimensions (WxDxH)	430 x 125 x 260 mm
Package width	430 mm
Package depth	125 mm
Package height	260 mm
Package weight	2.5 kg

Packaging content

Stand included	✔
Power adapter included	✔
Screws included	✔
Quick start guide	✔

Other features

Dimensions (WxDxH)	205 x 43 x 168 mm
Analog signal format system	PAL
Picture enhancement	DNIe digital image processing
Comb filter	3D
Noise filter	✔
Weight	1.4 kg
Height	168 mm
Width	205 mm
Depth	43 mm
Mean time between failures (MTBF)	50000 h
Certification	EMC Class A

5715063196618

Catalog Object Cloud