

ernitec

Ernitec 0070-24175 surveillance monitor CCTV monitor 190.5 cm (75") 3840 x 2160 pixels



Brand : Ernitec

Product code: 0070-24175

Product name : 0070-24175

75" 24/7 4K UHD surveillance monitor. Industrial-grade LED screen. Metal chassis design

[Ernitec 0070-24175 surveillance monitor CCTV monitor 190.5 cm \(75"\) 3840 x 2160 pixels:](#)

DISPLAY CHARACTERISTICS

Screen Size 75"

Active Display Area (mm) 1605.3mm(W)×933.75mm(H)

Display Mode 16:9

LED Type TFT-LED

Resolution 3840 × 2160

Display Color 1.073G

Pixel Pitch(mm) 0.372(H)×0.372(V)

Brightness(nits) 350cd/m2

Contrast Ratio 3000:1

Viewing Angle 178(H) /178(V)

Response Time 8ms

Backlight LED

INPUT&OUTPUT

DP x 1

HDMI x 3

Speaker 2x3W(Stereo)

VIDEO

PAL/NTSC/SECAM

Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..

POWER&Mount Way

AC100V~240V,50/60Hz

-30 to +85

140W

English(other languages supported)

VESA mount/45kg

50000Hours


VESA size: 600x400

ACCESSORIES

INCLUDED ACCESSORIES Industrial PSU,Screw, Cable holder, Quick start guide

Design		Performance	
Product type *	CCTV monitor	VESA mounting	✓
Mounting type *	Wall-mounted	Panel mounting interface	600 x 400 mm
Product colour *	Black	Ports & interfaces	
Display		HDMI ports quantity	3
Display diagonal *	190.5 cm (75")	DisplayPorts quantity	1
Display resolution *	3840 x 2160 pixels	Power	
Display type *	TFT	Power source type *	AC
Display brightness	350 cd/m ²	Power supply type	Internal
Display aspect ratio	16:9	Power consumption (typical)	140 W
Display viewable area (HxV)	1605.3 x 933.75 mm	Power consumption (standby)	0.4 W
Viewing angle, horizontal	178°	Power consumption (off)	0.1 W
Viewing angle, vertical	178°	AC input voltage	100 - 240 V
Display number of colours	1.073 billion colours	AC input frequency	50/60 Hz
Pixel pitch	0.372 x 0.372 mm	Energy efficiency class (SDR)	E
Contrast ratio (typical)	3000:1	Energy efficiency class (HDR)	F
Response time	8 ms	Operational conditions	
		Operating temperature (T-T)	-30 - 85 °C

Performance		Packaging content	
Analog signal format system	NTSC, PAL, SECAM	Quantity	1
Number of built-in speakers	2		
Speaker power	6 W		

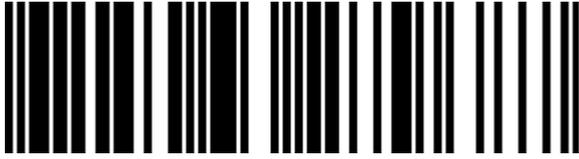

5715063279687

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.