ernitec

Ernitec 0070-24143-L surveillance monitor CCTV monitor 109.2 cm (43") 1920 x 1080 pixels

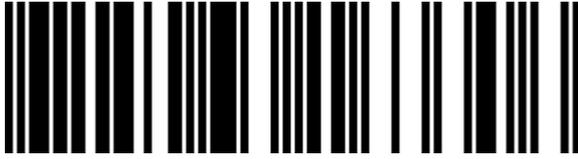**Brand :** Ernitec   **Product code:** 0070-24143-L

Product name : 0070-24143-L

43" 24/7 Full-HD surveillance monitor. 1x HDMI 2.0, 1x VGA, 2x BNC Input, 1x BNC Output, Speaker 2x3W

Ernitec 0070-24143-L surveillance monitor CCTV monitor 109.2 cm (43") 1920 x 1080 pixels:

Screen Size: 43 inches
Active Display Area: 941.184mm (W) × 529.146mm (H)
Display Mode: 16:9
LED Type: TFT-LED
Resolution: 1920 × 1080
Display Color: 1.073 billion
Pixel Pitch: 0.294mm (H) × 0.294mm (V)
Brightness: 350 nits
Contrast Ratio: 1000:1
Viewing Angle: 178° (H) / 178° (V)
Response Time: 5ms
Backlight: LED
Input & Output: 1 x HDMI 2.0: 1 x VGA: 2 x BNC Input: 1 x BNC Output: Speaker: 2x3W (Stereo)
VideoColor System: PAL/NTSC/SECAMOSD Control: Auto adjust, Brightness, Contrast, Horizontal/Vertical Position, Clock, Phase, Color, Language3D Comb Filter: YesVideo Noise Reduction: Yes
Power & Mounting: Power Supply: AC 100V~240V, 50/60Hz
Working Temperature: -30 to +85°CPower Consumption: 40W
Menu Languages: English (other languages supported)Mounting Options: Stand mount, VESA mount
MTBF: 50,000 hours
Included Accessories:
Industrial PSU
Screws
Cable holder
Quick start guide

Design

Product type *	CCTV monitor
Mounting type *	Freestanding
Product colour *	Black

Display

Display diagonal *	109.2 cm (43")
Display resolution *	1920 x 1080 pixels
Display type *	TFT
Display brightness	350 cd/m²
Display aspect ratio	16:9
Display viewable area (HxV)	941.184 x 529.146 mm
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.073 billion colours
Pixel pitch	0.294 x 0.294 mm
Contrast ratio (typical)	1000:1
Response time	5 ms

Performance

Analog signal format system	PAL, SECAM
Built-in speaker(s)	✔
Number of built-in speakers	2
Speaker power	6 W

Performance

On Screen Display (OSD)	✔
On Screen Display (OSD) languages	English

Ports & interfaces

HDMI ports quantity	1
HDMI version	2.0
VGA (D-Sub) ports quantity	1

Power

Power source type *	AC
Power supply type	Internal
Power consumption (typical)	40 W
Power consumption (standby)	0.2 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available

Operational conditions

Operating temperature (T-T)	-30 - 85 °C

Packaging content

Quick start guide	✔

5715063163306

Catalog Object Cloud