

Samsung LH32QMCEBGCXUE Signage Display Digital signage flat panel 81.3 cm (32") LCD Wi-Fi 400 cd/m² Black Tizen 7.0

Brand : Samsung

Product code: LH32QMCEBGCXUE

Product name : LH32QMCEBGCXUE


- Ultra Slim Depth
 - Even Bezel
 - Centered VESA Holes
- 32", VA, 1920 x 1080, 4000:1, HDMI, USB, Wi-Fi, Bluetooth, 100-240 V, 50/60 Hz, 727.3 x 421.9 x 28.5 mm, 5.2 kg

Samsung LH32QMCEBGCXUE. Product design: Digital signage flat panel. Display diagonal: 81.3 cm (32"), Display technology: LCD, Display resolution: 1920 x 1080 pixels, Display brightness: 400 cd/m². Wi-Fi. Operating system installed: Tizen 7.0. Product colour: Black



Display		Design	
Panel type	VA	Product colour *	Black
Display diagonal *	81.3 cm (32")	Screen shape	Flat
Display technology *	LCD	VESA mounting *	✓
Display resolution *	1920 x 1080 pixels	Panel mounting interface	100 x 100 mm
Display brightness *	400 cd/m²	Bezel width (bottom)	1.15 cm
Touchscreen *	✗	Bezel width (side)	1.15 cm
Native aspect ratio	16:9	Bezel width (top)	1.15 cm
Response time	8 ms	Performance	
Contrast ratio (typical)	4000:1	Purpose *	Commercial
Dynamic contrast ratio marketing name	Mega Contrast	HDCP	✓
Viewing angle, horizontal	178°	HDCP version	2.2
Viewing angle, vertical	178°	Power	
Pixel pitch	0.36375 x 0.36375 mm	Power consumption (typical) *	55 W
Horizontal scan range	30 - 81 kHz	Power consumption (sleep)	0.5 W
Vertical scan range	48 - 75 Hz	AC input voltage	100 - 240 V
Haze rate	2%	AC input frequency	50/60 Hz
Ports & interfaces		Computer system	
HDMI ports quantity *	3	Internal storage capacity	8 GB
HDMI version	1.4	Operating system installed	Tizen 7.0
USB port *	✓	Weight & dimensions	
USB ports quantity	2	Display width	727.3 mm
Ethernet LAN *	✓	Display depth	28.5 mm
Ethernet LAN (RJ-45) ports	1	Display height	421.9 mm
Wi-Fi *	✓	Display weight	5.2 kg
RS-232 interface	✓	Packaging data	
Infrared data port	✓	Package width	817 mm
Remote (IR) input	1	Package depth	119 mm
PC Audio out	✓	Package height	507 mm
Design		Package weight	6.9 kg
Product design *	Digital signage flat panel		

Design		Operational conditions	
Placement supported *	Indoor	Operating temperature (T-T)	0 - 40 °C
Orientation	Horizontal/Vertical	Operating relative humidity (H-H)	10 - 80%

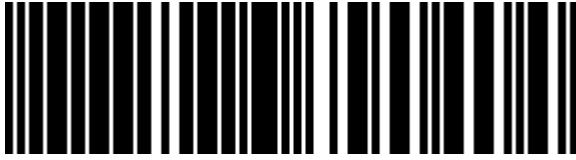

0887276790404



887276790404

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.