Canon

Canon imageFORMULA P-208 II Sheet-fed scanner 600 x 600 DPI A4 Black

Brand : Canon

Product family: imageFORMULA
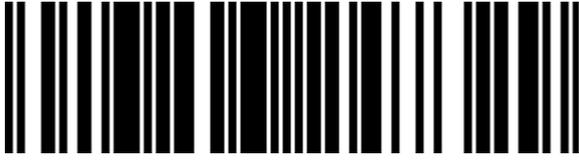
Product code: 9704B007

Product name : P-208 II

CMOS CIS, 600dpi, RGB LED, Duplex, 8ppm/16ipm, USB 2.0, 600g, Black
Canon imageFORMULA P-208 II. Maximum scan size: 216 x 356 mm, Optical scanning resolution: 600 x 600 DPI, Output colour depth: 24 bit. Scanner type: Sheet-fed scanner, Product colour: Black. Sensor type: CMOS CIS, Daily duty cycle (max): 100 pages, Light source: RGB LED. Auto document feeder (ADF) input capacity: 10 sheets. Maximum ISO A-series paper size: A4, Scanning media types supported: Plain paper, ISO A-series sizes (A0...A9): A4

Scanning

Maximum scan size *	216 x 356 mm
Optical scanning resolution *	600 x 600 DPI
Colour scanning	✔
Duplex scanning *	✔
Output colour depth	24 bit
Film scanning	✘
Greyscale levels	256
ADF scan speed (b/w, A4)	8 ppm
ADF scan speed (colour, A4)	8 ppm
Duplex ADF scan speed (b/w, A4)	16 ipm
Duplex ADF scan speed (colour, A4)	16 ipm

Design

Scanner type *	Sheet-fed scanner
Product colour *	Black

Performance

Sensor type *	CMOS CIS
Light source	RGB LED
Daily duty cycle (max) *	100 pages
Scan drivers	ISIS, TWAIN

Input capacity

Auto document feeder (ADF) input capacity	10 sheets

Paper handling

Scanning media types supported	Plain paper
Maximum ISO A-series paper size *	A4
ISO A-series sizes (A0...A9)	A4
Auto Document Feeder (ADF) media weight	52 - 209 g/m²

Ports & interfaces

USB port *	✔
USB version	2.0
Standard interfaces	USB 2.0

Network

Wi-Fi	✔

Power

Power supply type *	USB
Power consumption (typical)	2.5 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.5 W
Input voltage	5 V

Weight & dimensions

Width	312.5 mm
Depth	56.5 mm
Height	40 mm
Weight	600 g

Packaging content

Drivers included	✔
Bundled software	CaptureOnTouch CaptureOnTouch Lite Presto! BizCard Reader Evernote, SharePoint, Google Docs

Sustainability

Sustainability certificates	ENERGY STAR

System requirements

Windows operating systems supported	✔
Mac operating systems supported	✔

Operational conditions

Operating temperature (T-T)	10 - 32.5 °C
Operating relative humidity (H-H)	25 - 80%

Other features

Compliance certificates	RoHS

0013803247329

013803247329

Catalog Object Cloud