



## Zebra DS8178-HC Handheld bar code reader 1D/2D LED White



**Brand :** Zebra

**Product code:** DS8178-HCBU210FP5W

**Product name :** DS8178-HC


DS8178-HC Healthcare Rugged Cordless USB Scanner Kit

[Zebra DS8178-HC Handheld bar code reader 1D/2D LED White:](#)

Zebra's premium DS8178-HC cordless scanner is purpose-built for healthcare environments and clinician workflows. With unparalleled performance to read the toughest barcodes in any condition, clinicians can stay focused on patient care. Two interchangeable power options can be swapped at any time, right in your facility, providing the flexibility to meet changing business needs while protecting your original investment.

Zebra DS8178-HC. Type: Handheld bar code reader, Scanner type: 1D/2D, Sensor type: LED. Connectivity technology: Wired & Wireless, Standard interfaces: RS-232, USB, Keyboard wedge, Wireless range: 100 m. Product colour: White, International Protection (IP) code: IP42. Power source type: Battery, Battery type: Built-in battery, Battery life: 83 h. Weight: 235 g, Width: 66 mm, Depth: 107 mm

Scanning		Power	
Type *	Handheld bar code reader	Power source type *	Battery
Scanner type *	1D/2D	Battery type	Built-in battery
Sensor type *	LED	Number of batteries supported	1
Linear (1D) barcodes supported *	Codabar, Code 11, Code 128, Code 39, Code 93, GS1 DataBar Expanded, Interleaved 2 of 5, MSI, Plessey, U.P.C.	Number of reads per charge	65000
2D (matrix & stacked) barcodes supported *	Aztec Code, Composite Codes, Data Matrix, Han Xin, MaxiCode, Micro QR Code, MicroPDF417, PDF417, QR Code, TLC-39	Battery life	83 h
Wavelength	528 nm	Input voltage	5 V
Tilt reading angle	0 - 360°	Weight & dimensions	
Pitch reading angle	0 - 60°	Width	66 mm
Yaw reading angle	0 - 60°	Depth	107 mm
Ports & interfaces		Height	168 mm
Connectivity technology *	Wired & Wireless	Weight *	235 g
Standard interfaces *	RS-232, USB, Keyboard wedge	Operational conditions	
Wireless range	100 m	Operating temperature (T-T)	0 - 50 °C
Bluetooth version	4.0	Storage temperature (T-T)	-40 - 70 °C
Bluetooth Low Energy (BLE)	✓	Operating relative humidity (H-H)	5 - 95%
PC connection	RS-232/USB	Battery	
Performance		Battery technology	Lithium-Ion (Li-Ion)
International Protection (IP) code	IP42	Battery capacity	2500 mAh
Product colour *	White	Logistics data	
		Harmonized System (HS) code	84716070

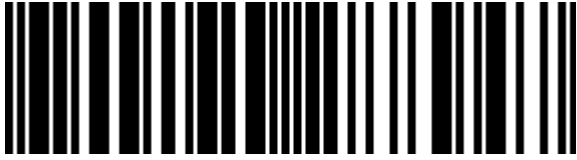

5704174288947



8596375046870

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.