



## APC SMT750RM2UC uninterruptible power supply (UPS) Line-Interactive 0.75 kVA 500 W 6 AC outlet(s)



Brand : APC

Product code: SMT750RM2UC

Product name : SMT750RM2UC

Smart-UPS 750VA, RM 2U, 120V with SmartConnect

APC SMT750RM2UC. UPS topology: Line-Interactive, Output power capacity: 0.75 kVA, Output power: 500 W. AC outlet types: NEMA 5-15R, Power plug: NEMA 5-15P, AC outlets quantity: 6 AC outlet(s).

Battery technology: Sealed Lead Acid (VRLA), Battery life (max): 6 year(s), Battery recharge time: 3 h.


Form factor: Rackmount, Product colour: Black, Rack capacity: 2U. Compliance certificates: RoHS,

Certification: CSA, CSA C22.2 No. 107.1, FCC Part 15 Class B, ICES-003, UL 1778, REACH


Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount
Output power capacity *	0.75 kVA	Rack capacity	2U
Output power *	500 W	Cable length	2.44 m
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	82 V	Display type	LCD
Input operation voltage (max) *	114 V	LED indicators	Status
Input frequency *	50/60 Hz	<b>Operational conditions</b>	
Output operation voltage (min)	110 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	127 V	Storage temperature (T-T)	-15 - 45 °C
Output frequency	50/60 Hz	Operating relative humidity (H-H)	0 - 90%
Automatic Voltage Regulation (AVR)	✓	Storage relative humidity (H-H)	0 - 95%
Surge energy rating	680 J	Operating altitude	0 - 3000 m
Hold time (min)	6 ms	Non-operating altitude	0 - 15000 m
Hold time (max)	10 ms	<b>Certificates</b>	
Noise level	41 dB	Compliance certificates	RoHS
Surge protection	✓	Certification	CSA, CSA C22.2 No. 107.1, FCC Part 15 Class B, ICES-003, UL 1778, REACH
Audible alarm(s)	✓	<b>Packaging content</b>	
Audible alarm modes	Alarm when on battery, Low battery alarm	Rack mount kit	✓
Auto-restart	✓	Cables included	RS-232, USB cable
<b>Ports &amp; interfaces</b>		Quick installation guide	✓
AC outlet types	NEMA 5-15R	<b>Sustainability</b>	
Power plug	NEMA 5-15P	Sustainability certificates	ENERGY STAR
AC outlets quantity	6 AC outlet(s)	<b>Weight &amp; dimensions</b>	
USB port	✓	Width	432 mm
Serial interface	✓	Depth	409 mm
Serial interface type	RJ-45	Height	86 mm
SmartSlot	✓	Weight	17.7 kg
<b>Battery</b>		<b>Packaging data</b>	
Battery technology	Sealed Lead Acid (VRLA)	Resource CD	✓
Number of batteries supported	1	Software CD	✓
Battery life (max)	6 year(s)	Package width	535 mm
Battery recharge time	3 h	Package depth	570 mm
Hot-swap battery	✓	Package height	235 mm
Automatic battery test	✓	Package weight	22.6 kg
Cold start	✓	<b>Logistics data</b>	
		Products per pallet	16 pc(s)
		Harmonized System (HS) code	85078000

**Other features**

Output voltage 120 V

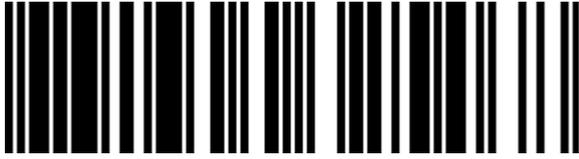

0731304325468



731304325468

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.