



## APC BR700G uninterruptible power supply (UPS) 0.7 kVA 420 W

Brand : APC

Product code: BR700G

Product name : BR700G

Back UPS RS LCD 700 Master Control

APC BR700G uninterruptible power supply (UPS) 0.7 kVA 420 W:

Power-saving outlets

- Automatically cuts power to idle equipment to conserve electricity.

Disconnected battery notification

- Warns when a battery is not available to provide backup power.

Boost and Trim Automatic Voltage Regulation (AVR)

- Gives higher application availability by correcting low and high voltage conditions without using the battery.

LCD graphics display


- Text and mimic diagrams that display modes of operation, system parameters and alarms.

APC BR700G. Output power capacity: 0.7 kVA, Output power: 420 W, Surge energy rating: 355 J. AC outlet types: NEMA 5-15R. Battery technology: Sealed Lead Acid (VRLA), Battery recharge time: 12 h.

Product colour: Black, Cable length: 1.83 m. Certification: FCC Part 15 Class B, FCC Part 68, NOM, UL 1778



Features		Operational conditions	
Output power capacity *	0.7 kVA	Storage relative humidity (H-H)	0 - 40%
Output power *	420 W	Operating altitude	0 - 3000 m
Surge energy rating	355 J	Non-operating altitude	0 - 3000 m
Noise level	40 dB	<b>Certificates</b>	
Audible alarm(s)	✓	Certification	FCC Part 15 Class B, FCC Part 68, NOM, UL 1778
<b>Ports &amp; interfaces</b>		<b>Weight &amp; dimensions</b>	
AC outlet types	NEMA 5-15R	Weight	7.15 kg
Ethernet LAN (RJ-45) ports	2	<b>Packaging data</b>	
<b>Battery</b>		Package weight	7.95 kg
Battery technology	Sealed Lead Acid (VRLA)	<b>Logistics data</b>	
Battery recharge time	12 h	Harmonized System (HS) code	85078000
<b>Design</b>		<b>Other features</b>	
Cable length	1.83 m	Output connections	3 x NEMA 5-15R 3 x NEMA 5-15R
Product colour *	Black	Dimensions (WxDxH)	91 x 310 x 190 mm
LED indicators	✓	Nominal output voltage	120 V
<b>Operational conditions</b>		Nominal input voltage	120 V
Operating temperature (T-T)	0 - 40 °C	Filtering	✓
Storage temperature (T-T)	-14 - 40 °C	Package dimensions (WxDxH)	138 x 442 x 252 mm
Operating relative humidity (H-H)	0 - 95%		

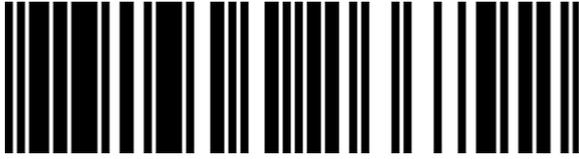

0731304266792



731304266792

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.